
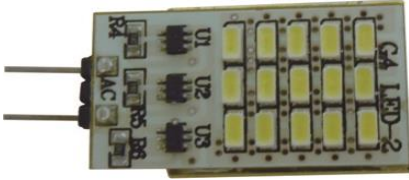






United Global Enterprises

Finest Quality in Energy Efficient Lighting Products

12V G4 LED BI PIN LAMP

 <p>1.5W Bi Pin Retrofit</p>	Model No.	UBPLEDR1.5W-WW / UBPLEDR1.5W-WH
	Dimension	Ø10 x Height 26mm , excluding pins
	LED Description	24pcs Epistar SMD 3014
	Colour Temperature	3000K / 6000K
	Luminous Flux	Warm White: 100 lumens Cool White: 110 lumens
	CR.I	70Ra
	Beam Angle	360°
	Heat Sink	Silicon
	Input Voltage	12V AC & DC
	Rated Wattage	1.5W
	Dimming	Non dimmable
Transformer / LED Driver	12V AC electronic transformer and 12V DC constant voltage LED driver.	
 <p>1.6W Bi Pin</p>	Model No.	UBPLED1.6W-WW/UBPLED1.6W-WH
	Housing Metal	FR-4 PCB, Aluminium Heat Sink Part
	Dimension	W14.5 x P8.3x H 26 mm excluding pins
	Input voltage	12V DC
	Rated Wattage	1.6W
	Beam angle	120°
	LED Description	15 SMD 3014 Lumilux LED
	Luminous Flux	115lm
	Replace Halogen lamp	15W
	CR.I	65Ra
	Colour Temperature	3000K / 6000K
	Life Time	40,000 Hours
	Dimming	Non dimmable
	Transformer / LED Driver	LED driver only
 <p>2W Bi Pin Retrofit</p>	Model No.	UBPLEDR2W-WW/UBPLEDR2W-WH
	Dimension	Ø12 x Height 21mm excluding pins
	Input voltage	12V AC & DC
	Rated Wattage	2W
	Beam angle	30°
	Luminous Flux	115lm
	Colour temperature	3000K / 6000K
	Dimming	Non dimmable
	Transformer / LED Driver	12V AC electronic transformer and 12V DC constant voltage LED driver.
	 <p>4W Bi Pin Retrofit</p>	Model No.
Dimension		Ø13 x Height 39mm excluding pins
LED Description		48pcs Epistar SMD 2835
Colour Temperature		3000K / 6000K
Luminous Flux		Warm White: 320 lumens White: 350 lumens
CR.I		80Ra
Beam Angle		360°
Heat Sink		Silicon
Input Voltage		12V AC & DC
Rated Wattage		4W
Dimming		Non dimmable
Transformer / LED Driver		12V AC electronic transformer and 12V DC constant voltage LED driver.

11 Harper St, Abbotsford Vic 3067

www.ugelighting.com.au sales@ugelighting.com.au

Ph: 9415 7992 Fax: 9415 7991