

TABLE OF CONTENTS

DOWNLIGHTS (P1 - P19)



DOWNLIGHTS P1



DOWNLIGHTS P2




DOWNLIGHTS P3



DOWNLIGHTS P4



DOWNLIGHTS P5



DOWNLIGHTS P6



DOWNLIGHTS P7



DOWNLIGHTS P8



DOWNLIGHTS P9



DOWNLIGHTS P10



DOWNLIGHTS P11




DOWNLIGHTS P12



DOWNLIGHTS P13



DOWNLIGHTS P14



DOWNLIGHTS P15



DOWNLIGHTS P16



DOWNLIGHTS P17



DOWNLIGHTS P18




DOWNLIGHTS P19

INTERIOR WALL LIGHTS (P20 - P34)



INTERIOR WL P20



INTERIOR WL P21



INTERIOR WL P22




INTERIOR WL P23



INTERIOR WL P24



INTERIOR WL P25



INTERIOR WL P26




INTERIOR WL P27




INTERIOR WL P28



INTERIOR WL P29



INTERIOR WL P30



INTERIOR WL P31



INTERIOR WL P32



INTERIOR WL P33



INTERIOR WL P34

LED STRIP LIGHTING (P35 - P43)



12V LED STRIP P35-37



24V LED STRIP P38



STRIP JOINERS P39-40



STRIP ACCESSORIES P41



CONTROLLER & BOOSTER P42



CONTROLLER P43


LINEAR ALUMINIUM EXTRUSIONS (P44 - P47)



EXTRUSION P44



EXTRUSION P45



LINEAR PROFILE P46



LINEAR PROFILE P47

TRACK LIGHTING (P48 - P70)



SINGLE CIRCUIT P48



SINGLE CIRCUIT P49



SINGLE CIRCUIT P50



SINGLE CIRCUIT P51



SINGLE CIRCUIT P52



SINGLE CIRCUIT P53



SINGLE CIRCUIT P54



SINGLE CIRCUIT P55



THREE CIRCUIT P56




THREE CIRCUIT P57




THREE CIRCUIT P58



THREE CIRCUIT P59



THREE CIRCUIT P60



MAGNETIC TRACK P61



MAGNETIC TRACK P62



MAGNETIC TRACK P63



MAGNETIC TRACK P64




MAGNETIC TRACK P65



MAGNETIC TRACK P66



MAGNETIC TRACK P67



MAGNETIC TRACK P68




MAGNETIC TRACK P69



MAGNETIC TRACK P70

LED PANELS & BATTENS (P71 - P76)



LED PANELS P71




LED PANELS P72



LED PANELS P73



LED BATTENS P74



LED BATTENS P75



LED BATTENS P76

EXTERIOR WALL LIGHTS (P77 - P96)



EXTERIOR WL P77



EXTERIOR WL P78



EXTERIOR WL P79



EXTERIOR WL P80



EXTERIOR WL P81



EXTERIOR WL P82



EXTERIOR WL P83



EXTERIOR WL P84




EXTERIOR WL P85



EXTERIOR WL P86



EXTERIOR WL P87




EXTERIOR WL P88



EXTERIOR WL P89



EXTERIOR WL P90



EXTERIOR WL P91



EXTERIOR WL P92



EXTERIOR WL P93



EXTERIOR WL P94



EXTERIOR WL P95



EXTERIOR WL P96

GARDEN LIHTS (P97 - P105)



GARDEN LIGHTS P97



GARDEN LIGHTS P98



GARDEN LIGHTS P99



GARDEN LIGHTS P100



GARDEN LIGHTS P101



GARDEN LIGHTS P102



GARDEN LIGHTS P103



GARDEN LIGHTS P104



GARDEN LIGHTS P105

LED FLOODLIGHTS & HIGHBAYS (P106 - P111)



LED FLOODLIGHTS P106



LED FLOODLIGHTS P107



LED FLOODLIGHTS P108



LED FLOODLIGHTS P109



LED FLOODLIGHTS P110



LED FLOODLIGHTS P111

LED DRIVERS (P112 - P115)



12V LED DRIVERS P112



12V LED DIM DRIVERS P113



24V LED DRIVERS P114



24V LED DIM DRIVERS P115

LED LAMPS (P116 - P122)



LED LAMPS P116



LED LAMPS P117



LED LAMPS P118



LED LAMPS P119



LED LAMPS P120




GARDEN LIGHTS P21




GARDEN LIGHTS P122

LED MIRROR LIGHTS (P123 - P124)



LED MIRROR LIGHTS P123



LED MIRROR LIGHTS P124

EMERGENCY & EXIT LIGHTS (P125 - P127)



EMERGENCY LIGHTS P125



EXIT LIGHTS P126



EMERGENCY BATTEN P127



EXHAUST FANS (P128 - P130)



EXHAUST FANS P128



EXHAUST FANS P129



EXHAUST FANS P130

CLOSE TO CEILING LIGHTS (P131 - P136)



CTC LIGHTS P131



CTC LIGHTS P132



CTC LIGHTS P133



CTC LIGHTS P134




CTC LIGHTS P135




CTC LIGHTS P136

PENDANTS (P137 - P166)



PENDANTS P137



PENDANTS P138



PENDANTS P139



PENDANTS P140



PENDANTS P141



PENDANTS P142



PENDANTS P143



PENDANTS P144



PENDANTS P145



PENDANTS P146



PENDANTS P147



PENDANTS P148



PENDANTS P149



PENDANTS P150



PENDANTS P151



PENDANTS P152



PENDANTS P153



PENDANTS P154



PENDANTS P155



PENDANTS P156



PENDANTS P157



PENDANTS P158



PENDANTS P159



PENDANTS P160



PENDANTS P161



PENDANTS P162



PENDANTS P163



PENDANTS P164



PENDANTS P165



PENDANTS P166

FLOOR & TABLE LAMPS (P167 - P174)



FLOOR LAMPS P167



FLOOR LAMPS P168



FLOOR LAMPS P169



FLOOR LAMPS P170



FLOOR LAMPS P171



FLOOR & TABLE LAMPS P172



TABLE LAMPS P173



TABLE LAMPS P174

SMART LIGHTING (P175 - P176)



SMART LIGHTING P175




SMART LIGHTING P176


ACCESSORIES (P177 - P180)



ACCESSORIES P177



ACCESSORIES P178



ACCESSORIES P179



ACCESSORIES P180

SONIC Range



9W & 10W

USONIC9-WH-3CCT-DIM

- . SONIC 9W LED downlight with built-in driver
- . Dimensions: Ø95 x H52mm, Cut out: Ø70mm
- . Beam angle: 120°
- . Finish: White
- . Built-in 9W SMD LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5500K
- . 650lm (3000K), 700lm (4000K), 770lm (5500K)
- . CRI >80
- . IP44
- . Dimmable, complete with flex & plug

USONIC20WH-3CCT

- . SONIC 20W LED downlight with built-in driver
- . Dimensions: Ø190 x H85mm, Cut out: Ø144mm
- . Beam angle: 120°
- . Finish: White
- . Built-in 20W SMD LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5500K
- . 1500lm (3000K), 1700lm (4000K), 1600lm (6000K)
- . CRI >80
- . IP44
- . Dimmable, complete with flex & plug



20W & 30W

USONIC10-WH-3CCT-DIM

- . SONIC 10W LED downlight with built-in driver
- . Dimensions: Ø114 x H62mm, Cut out: Ø90mm
- . Beam angle: 120°
- . Finish: White
- . Built-in 10W SMD LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5500K
- . 770lm (3000K), 850lm (4000K), 830lm (5500K)
- . CRI >80
- . IP44
- . Dimmable, complete with flex & plug

USONIC30WH-3CCT

- . SONIC 30W LED downlight with built-in driver
- . Dimensions: Ø225 x H85mm, Cut out: Ø175mm
- . Beam angle: 120°
- . Finish: White
- . Built-in 30W SMD LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5500K
- . 2600lm (3000K), 3800lm (4000K), 3300lm (5500K)
- . CRI >80
- . IP44
- . Dimmable, complete with flex & plug

SATURN Range




UDL12RD-WH-3CCT

- . SATURN 12W LED downlight with remote driver
- . Dimensions: Ø110 x H38mm, Cut out: Ø90mm
- . Beam angle: 120°
- . Finish: White
- . Built-in 12W SMD LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5500K
- . 760lm (3000K), 900lm (4000K), 860lm (6000K)
- . CRI >80
- . IP44
- . Dimmable, complete with flex & plug




UDL15GIM-WH-3CCT

- . SATURN 15W LED adjustable downlight
- . Dimensions: Ø110 x H47mm, Cut out: Ø90mm
- . Beam angle: 120°
- . Centre tilt 25°
- . Finish: White
- . Built-in 15W SMD LED
- . Colour Temp: 3CCT, 3000K / 4000K / 6000K
- . 1100lm (3000K), 1350lm (4000K), 1230lm (6000K)
- . CRI >80
- . IP20, dimmable, complete with flex & plug



UDL10RD-AL-WW / WH

- . SATURN 10W LED downlight with remote driver
- . Dimensions: Ø90 x H48mm, Cut out: Ø70mm
- . Beam angle: 120°
- . Finish: Aluminium
- . Built-in 10W SMD LED
- . 630lm (3000K) , 680lm (5500K)
- . CRI >80
- . IP44
- . Dimmable, complete with flex & plug



UDL12RDF-AL-WH

- . SATURN 12W LED downlight with remote driver
- . Dimensions: Ø110 x H35mm, Cut out: Ø90mm
- . Beam angle: 120°
- . Finish: Aluminium
- . Built-in 12W SMD LED
- . 860lm (5500K)
- . CRI >80
- . IP44
- . Dimmable, complete with flex & plug

OPTIC 12



UOPTIC12-3CCT

- . 12W OPTIC LED module
- . Dimensions: Ø50 x H75mm
- . Beam angle: 60°
- . Built-in 12W LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5000K
- . 819lm (3000K), 825lm (4000K), 870lm (5000K)
- . CRI >90
- . Dimmable
- . Complete LED driver and flex & plug

OPTIC MINI 12



UOPTICMINI12-WW

UOPTICMINI12-4K

UOPTICMINI12-WH

- . 12W MINI OPTIC LED module
- . Dimensions: Ø50 x H44mm
- . Beam angle: 60°
- . Built-in 12W LED
- . Colour Temp: 3000K / 4000K / 5000K
- . 819lm (3000K), 825lm (4000K), 870lm (5000K)
- . CRI >80
- . Dimmable
- . Complete LED driver and flex & plug

OPTIC 17



UOPTIC17-5CCT

- . 17W OPTIC LED module
- . Dimensions: Ø50 x H90mm
- . Beam angle: 60°
- . Built-in 17W LED
- . Colour Temp: 5CCT, 2700K/3000K/4000K/5000K/5700K
- . 1191lm(2700K), 1202lm(3000K), 1297lm(4000K), 1319lm(5000K), 1297lm(5700K)
- . CRI >90
- . Dimmable
- . Complete LED driver and flex & plug

ORION



UORION-BLK-3CCT

UORION-WH-3CCT

- . ORION 13W LED downlight with remote driver
- . Dimensions: Ø100 x H83mm, Cut out: Ø90mm
- . Beam angle: 60°
- . Finish: Matt Black / Matt White
- . Built-in 13W COB LED
- . 3CCT, 3000K / 4000K / 5500K
- . 960lm (3000K), 1110lm (4000K), 1060lm (5500K)
- . CRI >85
- . IP44
- . Dimmable, complete with flex & plug



UFOCUS-BLK-3CCT

UFOCUS-WH-3CCT

- . FOCUS 9W LED downlight with inbuilt driver
- . Dimensions: Ø100 x H86mm, Cut out: Ø90mm
- . Beam angle: 60°
- . Finish: Matt Black / Matt White
- . Built-in 9W COB LED
- . 3CCT, 3000K / 4000K / 5500K
- . 750lm (3000K), 850lm (4000K), 800lm (5500K)
- . CRI >80
- . IP54 front fascia only
- . Dimmable, complete with flex & plug

CONVERSION PLATE



UDL150PLATE-WH

- . The conversion plate suits LED downlights with a cut-out of up to 90mm and covers holes up to 140mm
- . Dimensions: Ø150mm
- . Finish: White

TELESCOPE



UTELESCOPE-BLK-WW

UTELESCOPE-WH-WW

- . TELESCOPE 12W LED adjustable downlight
- . Dimensions: Ø98 x H120mm, Cut out: Ø92mm
- . Beam angle: 60°
- . Finish: Black / White
- . Built-in 12W COB LED
- . 1050lm, 3000K
- . CRI >90
- . IP32
- . Dimmable, complete LED driver and flex & plug

TELESCOPE DUO



UTELESCOPE-2BLK-WW

UTELESCOPE-2WH-WW

- . TELESCOPE 2 x 12W LED adjustable downlight
- . Dimensions: W100 x L200 x H102mm
- . Cut out: W92 x L192mm
- . Beam angle: 60°
- . Finish: Matt Black / Matt White
- . Built-in 2 x 12W COB LED
- . 2 x 1050lm, 3000K
- . CRI >90
- . IP32
- . Dimmable, complete LED driver and flex & plug

UTELESCOPE-BAFFLE -GOLD

Gold baffle insert (optional extra)

MINI PIXEL



UPIXEL-BLK-WW

UPIXEL-WH-CW

UPIXEL-WH-WW

- . PIXEL 5W LED downlight
- . Dimensions: Ø45 x H45mm, Cut out: Ø40mm
- . Beam angle: 60°
- . Finish: Matt Black / Matt White
- . Built-in 5W COB LED
- . 470lm (3000K), 500lm (4000K)
- . CRI >95
- . IP44
- . Dimmable, complete LED driver and flex & plug

FENTI



UFENTI2-BLK-WW

UFENTI5-BLK-WW

UFENTI10-BLK-WW

- . FENTI LED downlight is architectural design with a minimalist aesthetic look
- . Dimensions:
 - W75 x L45mm, Cut out: W68 x L37mm (2 lights)
 - W147 x L45mm, Cut out: W140 x L37mm (5 lights)
 - W280 x L45mm, Cut out: W273 x L37mm (10 lights)
- . Beam angle: 45°
- . Finish: Matt Black
- . Built-in 4W / 10W / 20W LED
- . 272lm / 680lm / 1360lm, 3000K
- . IP20
- . Phase cut dimmable
- . Complete LED driver and flex & plug

SURFACE MOUNTED DOWNLIGHT

IRIS

**USD3018-BLK-3CCT****USD3018-WH-3CCT**

- . IRIS 14W surface mounted LED downlight
- . Dimensions: Ø85 x H110mm
- . Beam angle: 60°
- . Finish: Matt Black / Matt White
- . Built-in 14W COB LED
- . Colour Temp: 3CCT, 3000K / 4200K / 5500K
- . 1220lm (3000K), 1330lm (4200K), 1230lm (5500K)
- . CRI >90
- . IP20
- . Dimmable
- . Built-in dimmable LED driver

SATURN

**USATURN15BSM-BLK-3CCT****USATURN15BSM-WH-3CCT**

- . SATURN 15W surface mounted LED downlight
- . Dimensions: Ø112 x H100mm
- . Beam angle: 120°
- . Finish: Matt Black / Matt White
- . Built-in 15W SMD LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5000K
- . 1350lm (3000K), 1500lm (4200K), 1450lm (5000K)
- . CRI >80
- . IP65
- . Dimmable
- . Built-in dimmable LED driver

SURFACE MOUNTED DOWNLIGHT

STEALTH



Optional Extra:

UTRKB15ADJ-LENS-24 (24° lens)

UTRKB15ADJ-BAFFLE-GD (gold baffle)

USMB15ADJ-BLK-WW

USMB15ADJ-BLK-WH

USMB15ADJ-WH-WW

USMB15ADJ-WH-WH

- . STEALTH 15W surface mounted LED downlight
- . 90° rotation for the head
- . Dimensions: Ø70 x H179mm
- . Beam angle: 60°
- . Finish: Matt Black / Matt White
- . Built-in 15W COB LED
- . Colour Temp: 3000K / 5000K
- . 1200lm
- . CRI >90
- . IP20
- . Dimmable
- . Built-in dimmable LED driver

USMB12ADJ-BLK-3CCT

USMB12ADJ-WH-3CCT

CYCLOP



- . CYCLOP 12W surface mounted adjustable & 359° rotatable LED downlight
- . Dimensions: Ø85 x H87mm
- . Beam angle: 60°
- . Finish: Matt Black / Matt White
- . Built-in 12W COB LED
- . Colour Temp: 3000K / 4000K / 6000K
- . 978lm (3000K) / 1068lm (4000K) / 1042lm (6000K)
- . CRI >90
- . IP20
- . Dimmable
- . Built-in dimmable LED driver

MICRO Cabinet Light



UMICRO-BLK-CW

UMICRO-BLK-WW

UMICRO-WH-CW

UMICRO-WH-WW

UMICRO-AL-CW

UMICRO-AL-WW

- . MICRO recessed LED wall light
- . Dimensions: Ø40 x H32mm
- . Cut out: Ø34mm
- . Finish: Matt Black / Matt White / Aluminium
- . Built-in 3W LED
- . 180lm (3000K), 230lm (4000K)
- . Non dimmable
- . Complete with DC700mA integral driver

LED Cabinet Light



U3018SWWLED-AL

U3018SNWLED-AL

- . 3W Round LED recessed centre tilt cabinet light
- . Dimensions: Ø52 x H22mm
- . Cut out: Ø44mm
- . Beam angle: 45°
- . Finish: Brushed aluminium
- . Built-in 3W LED
- . 250lm (3000K), 290lm (5500K)
- . Complete LED driver

LED Cabinet Light



U3020SWWLED-WH

U3020SNWLED-WH

- . 3W Round LED recessed centre tilt cabinet light
- . Dimensions: Ø52 x H34mm
- . Cut out: Ø44mm
- . Beam angle: 45°
- . Finish: White
- . Built-in 3W LED
- . 250lm (3000K), 290lm (5000K)
- . Complete LED driver

12V Cabinet Light



UHD287-MCH

- . Surface mounted/recessed cabinet light
- . Dimensions: Ø71 x H20mm
- . Cut out: Ø65mm
- . Finish: Satin Chrome
- . Lamp base: G4 Bi Pin 20W Max.
- . Transformer and lamp not included



U71DL916-MCH

U71DL916-WH

- . Recessed cabinet light
- . Dimensions: Ø72 x H24mm
- . Cut out: Ø45mm
- . Finish: Satin Chrome / White
- . Lamp base: G4 Bi Pin 20W Max.
- . Transformer and lamp not included



UHD871-WH

- . Recessed cabinet light
- . Dimensions: Ø70 x H14mm
- . Cut out: Ø56mm
- . Finish: White
- . Lamp base: G4 Bi Pin 20W Max.
- . Transformer and lamp not included

LED SHOP LIGHTER



UMHLED38W-WH-3CCT

UMHLED38W-BLK-3CCT

- . 38W rectangular LED shop lighter
- . Housing adjustable from 0– 45° tilt
- . Dimensions: W240 x L145 x D130mm
- . Cut-out: W227mm x L130
- . Beam angle: 100°
- . Finish: White / Black
- . Built-in 38W LED
- . Colour Temp: 3CCT, 3000K / 4000K / 5000K
- . 3780lm (3000K), 4000lm (4000K), 3960lm (5000K)
- . CRI >80
- . IP20
- . Non-dimmable
- . Built-in LED driver with flex & plug

ORBIT




UORBIT30-WH-WH

UORBIT30-WH-WW

- . ORBIT 30W LED adjustable downlight
- . Dimensions: Ø142 x H135mm, Cut out: Ø110mm
- . Beam angle: 38°
- . Finish: Matt White
- . Built-in 30W COB LED
- . 3000K / 4000K
- . 2600lm (3000K), 2800lm (4000K)
- . CRI >90
- . IP20
- . Non-dimmable, complete with flex & plug



Frames to Suit OPTIC Downlight

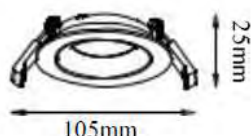

UDL3060-BLK

UDL3060-WH

- . Dimensions: Ø105 x H25mm
- . Cut-out: Ø90mm
- . 25° tiltable
- . IP20
- . Finish: Black / White



UDL3061-BLK

UDL3061-WH


- . Dimensions: Ø85 x H44mm
- . Cut-out: Ø75mm
- . Fixed
- . IP20
- . Finish: Black / White



UDL3062-BLK

UDL3062-WH


- . Dimensions: Ø100 x H45.5mm
- . Cut-out: Ø90mm
- . 25° tiltable
- . IP20
- . Finish: Black / White



UDL3063-BLK

UDL3063-WH


- . Dimensions: Ø85 x H32mm
- . Cut-out: Ø70mm
- . Fixed
- . IP20
- . Finish: Black / White

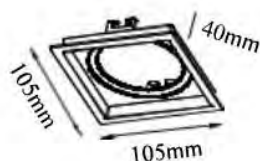

UDL3064/1-BLK

UDL3064/1-WH

- . Dimensions: W105 x L105 x H40mm
- . Cut-out: W100 x L100mm
- . 25° tiltable
- . IP20
- . Finish: Black / White

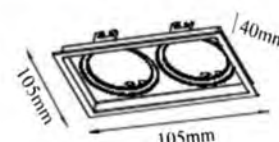


UDL3064/2-BLK

UDL3064/2-WH

- . Dimensions: W200 x L110 x H40mm
- . Cut-out: W190 x L100mm
- . 25° tiltable
- . IP20
- . Finish: Black / White

Frames to Suit OPTIC Downlight



UDL3065-BLK

UDL3060-WH


. Dimensions: Ø100 x H45.5mm

. Cut-out: Ø90mm

. Fixed

. IP65

. Finish: Black / White



UDL3065B-BLK

UDL3060B-WH


. Dimensions: Ø100 x H45.5mm

. Cut-out: Ø90mm

. Fixed

. IP20

. Finish: Black / White



UDL3066-BLK

UDL3066-WH


. Dimensions: Ø98 x H24mm

. Cut-out: Ø70-90mm

. Fixed

. IP20

. Finish: Black / White



UDL3067-BLK

UDL3067-WH

. Dimensions: Ø86 x H30mm

. Cut-out: Ø68mm

. Fixed

. IP20

. Finish: Black / White



U2017-WH (Pin Hole)


. Dimensions: W85 x H105mm

. Cut-out: Ø70mm

. Fixed

. IP20

. Finish: White



U2018-WH (Key Hole)

. Dimensions: W85 x H105mm



. Cut-out: Ø70mm

. Fixed

. IP20


. Finish: White

Frames to Suit OPTIC Downlight

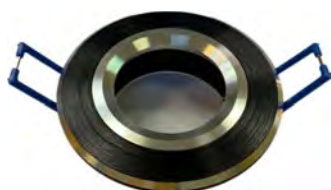


U2013B-AL-BLK

- . Dimensions: Ø78 x H28mm
- . Cut-out: Ø67mm
- . Fixed
- . IP20
- . Finish: Black with Aluminium



U2015-MCH

- . Dimensions: Ø82 x H25mm
- . Cut-out: Ø70mm
- . Fixed
- . IP20
- . Finish: Satin Chrome



U2014-AL

- . Dimensions: Ø82 x H25mm
- . Cut-out: Ø68mm
- . Fixed
- . IP20
- . Finish: Aluminium




UHD1712-BLK

UHD1712-WH

UHD1712-RAW

- . Dimensions: Ø90 x H62mm
- . Cut-out: Ø80mm
- . Fixed
- . IP20
- . Finish: Black / White / Raw




U3018-BLK

U3018-CH

U3018-MCH

- . Dimensions: W95 x H33mm
- . Cut-out: Ø80mm
- . Tilted
- . IP20
- . Finish: Black / Chrome / Satin Chrome




U3023B-CH

U3023B-MCH

U3023B-WH

- . Dimensions: W103 x H35mm
- . Cut-out: Ø90mm
- . Tilted
- . IP20
- . Finish: Chrome / Satin Chrome / White


Frames to Suit OPTIC Downlight



U2014B-AL



U2014B-WH

- . Dimensions: Ø80 x H25mm
- . Cut-out: Ø68mm
- . Tilted
- . IP20
- . Finish: Aluminium / White




UMR16TRIO-AL

- . Dimensions: Ø91 x H28mm
- . Cut-out: Ø76mm
- . Tilted
- . IP20
- . Finish: Aluminium



U3016-AL


- . Dimensions: W82 x L82 x H33mm
- . Cut-out: Ø70mm
- . Fixed
- . IP20
- . Finish: Aluminium



ULVCUBEDL-BLK


ULVCUBEDL-SLV

- . Dimensions: W100 x L100 x H40mm
- . Cut-out: Ø90mm
- . Fixed
- . IP20
- . Finish: Black / Silver with black insert



U3016B-WH

- . Dimensions: W80 x L80 x H28mm
- . Cut-out: Ø68mm
- . Fixed
- . IP20
- . Finish: White



U3017-AS

- . Dimensions: W91 x L91 x H28mm
- . Cut-out: Ø76mm
- . Tilted
- . IP20
- . Finish: Anodised Silver

Frames to Suit OPTIC Downlight



UDL3022/2-AL

UDL3022/2-WH

- . Dimensions: W172 x L91 x H28mm
- . Cut-out: W153 x L76mm
- . Tilted
- . IP20
- . Finish: Aluminium / White



UDL3022/3-AL

- . Dimensions: W299 x L90 x H28mm
- . Cut-out: W242 x L82mm
- . Tilted
- . IP20
- . Finish: Aluminium



UDL3022/4-AL

- . Dimensions: W337 x L90 x H40mm
- . Cut-out: W325 x L82mm
- . Tilted
- . IP20
- . Finish: Aluminium

Bathroom Downlight Frames (MR16)




UHD194-CH

UHD194-MCH

UHD194-WH

- . Dimensions: Ø87 x H27mm
- . Cut-out: Ø70mm
- . Fixed
- . IP65 cast iron body and trim
- . Finish: Chrome / Satin Chrome / White




UHD907-MCH

UHD907-WH

- . Dimensions: W87 x L87 x H27mm
- . Cut-out: Ø70mm
- . Fixed
- . IP65 cast iron body and trim
- . Finish: Satin Chrome / White

Frames to Suit MR16 Globe




UDL3021/1-MCH

UDL3021/1-SLV

UDL3021/1-WH

- . Dimensions: W130 x L130 x H115mm
- . Cut-out: W150 x L105mm
- . Tilted
- . IP20
- . Finish: Satin Chrome / Silver / White

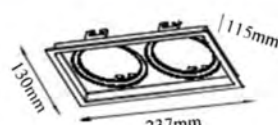


UDL3021/2-MCH

UDL3021/2-SLV

UDL3021/2-WH


- . Dimensions: W237 x L130 x H115mm
- . Cut-out: W205 x L105mm
- . Tilted
- . IP20
- . Finish: Satin Chrome / Silver / White



UDL3027R-MCH

UDL3027R-WH


- . Dimensions: Ø110
- . Cut-out: Ø96mm
- . Swivel snorkel 359° rotation
- . IP20
- . Finish: Satin Chrome / White



UDL3028-MCH


UDL3028-WH

- . Dimensions: Ø100 x H40mm
- . Cut-out: Ø90mm
- . Tilted
- . IP20
- . Finish: Satin Chrome / White



UDL3030-MCH


- . Dimensions: Ø104 x H45mm
- . Cut-out: Ø90mm
- . Tilted
- . IP20
- . Finish: Satin Chrome



UDL3036-WH

- . Dimensions: W106 x L106 x H40mm
- . Cut-out: Ø95mm
- . Tilted
- . IP20
- . Finish: White

Frames to Suit GU10 & MR16 Globe



UDL3028GU10-MCH

UDL3028GU10-WH


. Dimensions: Ø100 x H40mm

. Cut-out: Ø90mm

. Tilted

. IP20

. Finish: Satin Chrome / White



UDL3029GU10-MCH

UDL3029GU10-WH


. Dimensions: W105 x L105 x H47mm

. Cut-out: Ø90mm

. Tilted

. IP20

. Finish: Satin Chrome / White



UDL3035B-MCH

UDL3035B-WH

. Dimensions: W110 x L110 x H77mm

. Cut-out: Ø96mm

. Square swivel snorkel 359° rotation

. IP20

. Finish: Satin Chrome / White

Fire Rated & Acoustic Rated Downlight Frame



U2013GU10FIRE-WH

. Dimensions: Ø87 x H142mm

. Cut-out: Ø72mm

. Fixed

. IP20


. Finish: White

. 90 minutes fire rated

. Acoustic rated

. 240V GU10 holder included, lamp excluded

Frames to Suit MR11 Globe



U2013S-MCH

U2013S-WH


- . Dimensions: Ø60 x H27mm
- . Cut-out: Ø51mm
- . Fixed
- . IP20
- . Finish: Satin Chrome / White



U3018S-MCH

U3018S-WH


- . Dimensions: Ø69 x H25mm
- . Cut-out: 60mm
- . Tilted
- . IP20
- . Finish: Satin Chrome / White



U3016S-MCH

U3016S-WH

- . Dimensions: W60 x L60 x H27mm
- . Cut-out: Ø51mm
- . Fixed
- . IP20
- . Finish: Satin Chrome / White



U3017S-MCH

U3017S-WH

- . Dimensions: W73 x L73 x H24mm
- . Cut-out: Ø60mm
- . Tilted
- . IP20
- . Finish: Satin Chrome / White



ORIS



UWL-ORIS1-AMB

- . ORIS 1 light wall light
- . Dimensions: W130 x L280 x H167mm
- . Finish: Satin brass with amber glass
- . Lamp: 1 x G9, 25W Max. (not incl.)



UWL-ORIS2-AMB

- . ORIS 2 light wall light
- . Dimensions: W130 x L595 x H167mm
- . Finish: Satin brass with amber glass
- . Lamp: 2 x G9, 25W Max. (not incl.)

ORB



UWL-ORB-WH

UWL-ORB-BLK

- . ORB opal glass wall light
- . Dimensions: Ø110 x H105mm
- . Finish: Opal glass with White / Black metal base
- . Lamp: 1 x G9, 25W Max. (not incl.)

ILLIMITE COMBINATION



UILLIMITE-PLATE + UWL-ORB-WH

- . Plate available in Ø200 & Ø300mm, colour available in Black, White, Brushed Brass & Smoke Glass
- . ORB available in Black or White base with opal glass
- . Lamp: 1 x G9, 25W Max. (not incl.)



UILLIMITE-PLATE + UWL-ILLIMITE

- . Plate available in Ø200 & Ø300mm, colour available in Black, White, Brushed Brass & Smoke Glass
- . Illimite lamp holder available in Black & White
- . Lamp: 1 x E27, 60W Max. (not incl.)



UWL-ILLIMITE-BLK/WH/BB

Dimensions: W80 x H103mm
Black, White & Brushed Brass



UILLIMITE-PLATE

ILLIMITE plate Ø200 & Ø300mm
Black, White, Brushed Brass & Smoke Glass

ILLIMITE



UWL-ILLIMITE-WH

UWL-ILLIMITE-BB

UWL-ILLIMITE-BLK

- . ILLIMITE wall light
- . Dimensions: W80 x H103mm
- . Finish: White , Black & Brushed Brass
- . Lamp: 1 x E27, 60W Max. (not incl.)

YARRA



UWLYARRA1BLK-WW

UWLYARRA1WH-WW

- . YARRA single light LED wall light
- . On / Off switch
- . Dimensions: Ø120 x H120mm
- . Finish: Matt Black / Matt White
- . Built-in 7.4W LED, 527lm 3000K
- . Adjustable to 325°
- . Non dimmable

UWLYARRA2BLK-WW

UWLYARRA2WH-WW

- . YARRA double light LED wall light
- . Separate On / Off switch
- . Dimensions: W265 x L150 x H120mm
- . Finish: Matt Black / Matt White
- . Built-in 2 x 7.4W LED, 2 x 527lm 3000K
- . Adjustable to 325°
- . Non dimmable

IBOX



UWL-IBOX-BLK-WW

UWL-IBOX-WH-WW

- . IBOX slimline LED uplighter
- . Dimensions: W200 x L80 x H21mm
- . Finish: Matt Black / Matt White
- . Built-in 20W COB LED
- . CRI >85
- . 1765lm 3000K
- . Dimmable



LUNAR



ULUNAR30

- . LUNAR LED uplighter
- . Dimensions: W288 x H28 x P128mm
- . Finish: Matt White
- . Built-in 30W LED
- . 2810lm 3000K
- . Dimmable

SACHI



UE030-WH-WW

- . SACHI up down LED wall light
- . Dimensions: W100 x L70 x H100mm
- . Finish: Matt White
- . Built-in 3W LED
- . 420lm 3000K
- . Non dimmable



UE031-WH-WW

- . SACHI up down LED wall light
- . Dimensions: W200 x L70 x H100mm
- . Finish: Matt White
- . Built-in 2 x 3W LED
- . 630lm 3000K
- . Non dimmable

LINEAR



UWL40WH-WW

- . LINEAR vertical / horizontal LED wall light
- . Dimensions: W300 x L50 x H125mm
- . Finish: Matt White
- . Built-in 16 x 0.5W LED
- . 260lm 3000K
- . Non dimmable



UWL41WH-WW

- . LINEAR vertical / horizontal LED wall light
- . Dimensions: W500 x L50 x H125mm
- . Finish: Matt White
- . Built-in 30 x 0.54W LED
- . 520lm 3000K
- . Non dimmable

PIVOT



UPIVOT-S-WW

UPIVOT-M-WW

UPIVOT-L-WW

- . PIVOT LED vanity light
- . Dimensions: W80 x L310 x P52.5mm (S)
W80 x L611 x P52.5mm (M)
W80 x L912 x P52.5mm (L)
- . Finish: White
- . 6W (S), 12W (M), 18W (L)
- . 405lm (S), 784lm (M), 1150lm (L), 3000K
- . Non dimmable

LUSION



UWL-LUSION-BLK-WW

- . LUSION LED vanity light
- . Dimensions: W500 x Ø50 x H100mm
- . Finish: Matt Black with opal glass
- . Built-in 13W LED 3000K
- . Dimmable

ARC




UARC-BLK-WW-DIM

UARC-WH-WW-DIM

- . ARC adjustable up down wall light
- . Dimensions: W100 x L180 x P55mm
- . Finish: Matt Black / Matt White
- . Built-in 6W LED
- . 440lm 3000K
- . Dimmable

REFOCUS SQUARE

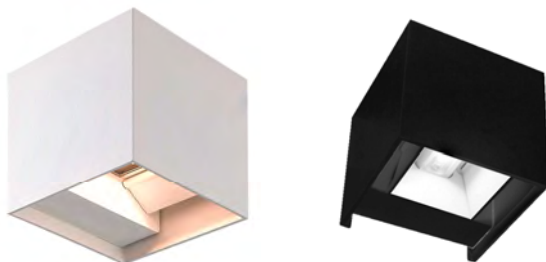

UWL42-WH-SQ-WW

UWL42-BLK-SQ-WW

- . REFOCUS square up down LED wall light
- . Dimensions: W100 x L100 x D100mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 6W LED
- . Lumen: 550lm 3000K
- . IP65
- . Non dimmable

REFOCUS ROUND



UWL42-WH-RD-WW

UWL42-BLK-RD-WW

- . REFOCUS round up down LED wall light
- . Dimensions: W100 x Ø135 x P115mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 6W LED
- . Lumen: 550lm 3000K
- . IP65
- . Non dimmable

FLOS



UWL-FLOS-20GLD

UWL-FLOS-30GLD

- . FLOS glass ball wall light
- . Dimensions: Ø200 x H216mm / Ø300 x H316mm
- . Finish: Opal glass with brash brass
- . Lamp: 1 x E27, 60W Max. (not incl.)

SYLVIA



UWL-SYLVIA

- . SYLVIA LED wall light
- . Dimensions: Ø98 x H68mm
- . Finish: Clear glass
- . Built-in 3W Cree COB LED
- . 270lm 3000K
- . Remote non dimmable driver included
- . IP44

Replica JASON MILLER



UWRJM-2

- . Replica Jason Miller wall light
- . Dimensions: H440 x P220mm
- . Finish: Matt black with smoke glass
- . Lamp: 2 x E27 base fancy round (not incl.)

Recommended LED globe:

UFR-R-CH-2W-ESWW-DIM



ERA



UW9082-1

- . ERA glass wall light
- . Dimensions: W80 x L135 x P155mm
- . Finish: Opal glass with brash brass
- . Lamp: 1 x G9, 40W Max. (not incl.)


STELLA



UW8166/1

- . STELLA adjustable and rotatable wall light
- . Dimensions: W120 x L170 x P150mm
- . Finish: Opal glass with satin chrome brass
- . Lamp: 1 x E27 or E14, 40W Max. (not incl.)

SEMI CIRCLE

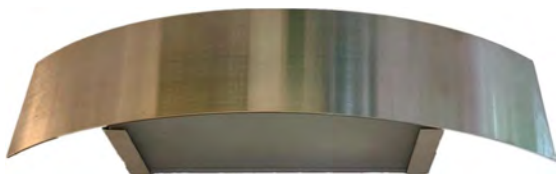

UF18W

- . Semi circle designer up down wall light
- . Dimensions: W385 x L85 x P90mm
- . Finish: Satin Chrome
- . Lamp: 1 x 13W PLC 2 pin lamp (not incl.)



CONCENTRA



UW14270/1+129A

- . CONCENTRA up down wall light
- . Dimensions: W85 x L230 x P83mm
- . Finish: Aluminium
- . Lamp: 1 x 118mm QI lamp, 150W Max. (not incl.)

STAR



UWL105AL-RD-4WH

UWL105AL-SQ-4WH

- . STAR 4 way round / square LED wall light
- . Dimensions: W45 x L45 x D16mm
- . Finish: Aluminium
- . Built-in 4 x 0.6W LED
- . 30lm 5000K only
- . Non dimmable
- . 12V DC constant voltage LED driver required (not incl.)


SATORI



UE025-3K

- . SATORI up down LED wall light
- . Dimensions: W32 x H150mm x P70mm
- . Finish: Aluminium
- . Built-in 4 x 1W
- . 2 x 290lm 3000K
- . Non dimmable

COLAN

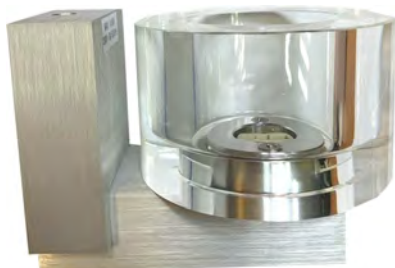


UG766R/A

- . COLAN round surface mounted wall light
- . Dimensions: Ø80 x L110 x H77mm
- . Finish: Aluminium & Clear Glass
- . Lamp: 1 x 240V G9 50W Max (not incl.)



UG766SQ/A

- . COLAN square surface mounted wall light
- . Dimensions: W75 x L110 x H80mm
- . Finish: Aluminium & Clear Glass
- . Lamp: 1 x 240V G9 50W Max (not incl.)



UE023-AL-NW

UE023-AL-WW

- . LED recessed wall light
- . Dimensions: W60 x L60 x D15mm
- . Cut out: Ø43mm
- . Finish: Aluminium
- . Built-in 1W LED
- . 150lm 2700K / 5000K
- . Non dimmable
- . Constant current 350mA LED driver required (not incl.)




UHD253-SN

UHD253-CH

- . Recessed 12V square wall light
- . Dimensions: W73 x L73 x D18mm
- . Cut out: Ø63mm
- . Finish: Anodised Silver / Chrome
- . Lamp: 12V G4 Bi Pin 20W Max (not incl.)

INFINITY



UWL36WH-WW


- . INFINITY recessed wall light
- . Dimensions: W76 x L76 x D43mm
- . Cut out: W65 x L65mm
- . Finish: Matt White
- . Built-in 2.5W LED
- . 420lm 3000K
- . Non dimmable, 12V integral driver included



UWL37WH-WW

- . INFINITY II recessed wall light
- . Dimensions: W36 x L184 x D38mm
- . Cut out: W27 x L168mm
- . Finish: Matt White
- . Built-in 2.5W LED
- . 420lm 3000K
- . Non dimmable, 12V integral driver included

EDGE



UWL38WH-WW

- . EDGE recessed wall light
- . Dimensions: W76 x L76 x D43mm
- . Cut out: W65 x L65mm
- . Finish: Matt White
- . Built-in 2.5W LED
- . 420lm 3000K
- . Non dimmable, 12V integral driver included



UWL39WH-WW

- . EDGE II recessed wall light
- . Dimensions: W56 x L184 x D38mm
- . Cut out: W47 x L168mm
- . Finish: Matt White
- . Built-in 2.5W LED
- . 420lm 3000K
- . Non dimmable, 12V integral driver included

PANEL WALL LIGHT



UWLED100BLK-3CCT


UWLED100WH-3CCT

UWLED100SLV-WH

UWLED100SLV-WW

- . LED recessed panel wall light
- . Dimensions: W100 x L100 x D35mm
- . Cut out: W91 x L91mm
- . Finish: Black, White or Painted Silver with opal lens
- . Built-in 2W LED
- . 90lm (3000K), 100lm (6000K)
- . Non dimmable
- . Complete with integral LED driver

HELIX



UOWHELIX-BLK-WH

UOWHELIX-BLK-WW

UOWHELIX-WH-WH

UOWHELIX-WH-WW

UOWHELIX-SCH-WH

UOWHELIX-SCH-WW

- . HELIX recessed LED wall light
- . Dimensions: W78 x L78 x D34mm
- . Cut out: W70 x L70mm
- . Finish: Black, White or Satin Chrome with opal lens
- . Built-in 3W LED
- . 200lm (3000K), 220lm (5500K)
- . IP54
- . Non dimmable
- . 12V constant current LED driver required (not incl.)

JAZZ 12V



UWL43-WH-WW-KIT

UWL43-BLK-WW-KIT

- . JAZZ square exterior LED wall light
- . Dimensions: W55 x L55 x P42mm (without canister)
- . Cut out: Ø45mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 2.2W LED
- . Lumen: 180lm 3000K
- . IP65
- . Non dimmable
- . 700mA LED driver included

VOGUE 12V



UWL44-WH-WW-KIT

UWL44-BLK-WW-KIT

- . VOGUE round exterior LED wall light
- . Dimensions: Ø55 x P42mm (without canister)
- . Cut out: Ø45mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 2.2W LED
- . Lumen: 180lm 3000K
- . IP65
- . Non dimmable
- . 700mA LED driver included

ASTRO



UASTRO-BLK-WH

UASTRO-BLK-WW

UASTRO-WH-WH

UASTRO-WH-WW

- . ASTRO recessed LED wall light
- . Dimensions: Ø45 x H26mm
- . Cut out: Ø35mm
- . Finish: Matt Black / Matt White
- . Built-in 3W LED
- . 195lm (3000K), 210lm (6000K)
- . Non dimmable
- . Complete with integral driver

MICRO



UMICRO-BLK-CW

UMICRO-BLK-WW

UMICRO-WH-CW

UMICRO-WH-WW

UMICRO-AL-CW

UMICRO-AL-WW

- . MICRO recessed LED wall light
- . Dimensions: Ø40 x H32mm
- . Cut out: Ø34mm
- . Finish: Matt Black / Matt White / Aluminium
- . Built-in 3W LED
- . 180lm (3000K), 230lm (4000K)
- . Non dimmable
- . Complete with DC700mA integral driver

12V LED Strips - Indoor IP20



USL-5W-WW-I-KIT

- . 5W 12V LED blister pack, driver included
- . Dimensions: W8 x 5000mm
- . SMD3528, 60 diodes/M
- . 2700-3000K, 350lm/M
- . IP20
- . Non-dimmable



USL-10W-WW-I (3000K)
USL-10W-4000K-I (4000K)
USL-10W-CW-I (5500K)

- . 10W 12V LED indoor strip light
- . Dimensions: W8 x 5000mm
- . SMD3528, 120 diodes/M
- . 3000K/4000K/5500K, 750/900/820lm/M
- . IP20
- . Can be dimmable by using dimmable driver



USL-7.6W-WW-I (3000K)
USL-7.6W-4000K-I (4000K)
USL-7.6W-CW-I (5500K)

- . 7.6W 12V LED indoor strip light
- . Dimensions: W8 x 5000mm
- . SMD3528, 60 diodes/M
- . 3000K/4000K/5500K, 660/720/680lm/M
- . IP20
- . Can be dimmable by using dimmable driver



USL-16W-WW-I (3000K)
USL-16W-CW-I (5500K)

- . 16W 12V LED indoor strip light
- . Dimensions: W8 x 5000mm
- . SMD3528, 120 diodes/M
- . 3000K/5500K, 1200/1440lm/M
- . IP20
- . Can be dimmable by using dimmable driver

12V LED Strips - Indoor IP20



USL-24W-WW-I (3000K)

USL-24W-CW-I (5500K)

- . 24W 12V LED indoor strip light
- . Dimensions: W10 x 5000mm
- . SMD3528, 240 diodes/M
- . 3000K/5500K, 1680/1850lm/M
- . IP20
- . Can be dimmable by using dimmable driver

USL-15W-RGBWW-I

USL-15W- RGBCW-I

- . 15W 12V RGB LED indoor strip light
- . Dimensions: W12 x 5000mm
- . SMD3528, 60 diodes/M
- . RGB Warm White / RGB Cool White
- . IP20
- . RGB+W controller sold separately



12V LED Strips - Outdoor IP65



USL-7.6W-WW-OA (3000K)

USL-7.6W-CW-OA (5500K)

- . 7.6W 12V LED outdoor strip light
- . Dimensions: W8 x 5000mm
- . SMD3528, 60 diodes/M
- . 3000K/5500K, 660/680lm/M
- . IP65
- . Can be dimmable by using dimmable driver



USL-10W-WW-OA (3000K)

USL-10W-CW-OA (5500K)

- . 10W 12V LED outdoor strip light
- . Dimensions: W8 x 5000mm
- . SMD3528, 120 diodes/M
- . 3000K/5500K, 750/820lm/M
- . IP65
- . Can be dimmable by using dimmable driver



USL-16W-WW-OA (3000K)

USL-16W-CW-OA (5500K)

- . 16W 12V LED outdoor strip light
- . Dimensions: W8 x 5000mm
- . SMD3528, 120 diodes/M
- . 3000K/5500K, 1200/1440lm/M
- . IP65
- . Can be dimmable by using dimmable driver



USL-15W-RGB-OA

- . 15W 12V RGB LED outdoor strip light
- . Dimensions: W10 x 5000mm
- . SMD3528, 60 diodes/M
- . RGB
- . IP65
- . RGB controller sold separately

24V LED Strips - Indoor IP20



USL-24V-8W20M-3K-I (3000K)

USL-24V-8W20M-4K-I (4000K)

- . 8W 24V LED indoor strip light
- . Dimensions: W10 x 20,000mm
- . SMD3528, 120 diodes/M
- . 3000K/5500K, 780/850lm/M
- . IP20
- . Can be dimmable by using dimmable driver



USL-24V-10W-3K-I-10M

USL-24V-10W-4K-I-10M

- . 10W 24V LED indoor strip light
- . Dimensions: W8 x 10,000mm
- . SMD3528, 120 diodes/M
- . 3000K/5500K, 780/850lm/M
- . IP20
- . Can be dimmable by using dimmable driver



USL-24V-10W-RGB-I-10M

- . 10W 24V RGB LED indoor strip light
- . Dimensions: W8 x 10,000mm
- . SMD3528, 120 diodes/M
- . RGB, 780lm/M
- . IP20



USL-24V-COB-9W10M-3K-I (3000K)


USL-24V-COB-9W10M-4K-I (4000K)

- . 9W 24V dotless LED indoor strip light
- . Dimensions: W8 x 10,000mm
- . SMD3528, 480 diodes/M
- . 3000K/4000K, 900/990lm/M
- . IP20
- . CRI >90

Beetle Clip LED Strip Joining System

Beetle connectors are an inexpensive and quick method of securely connecting LED strip lighting without the need for time consuming and fiddly soldering. They are available in strip to tail wire connectors and strip to strip connectors. Beetle clips are designed to fit into aluminium extrusions and will fit in all UGE LED strip extrusions.

Strip to Tail Wire

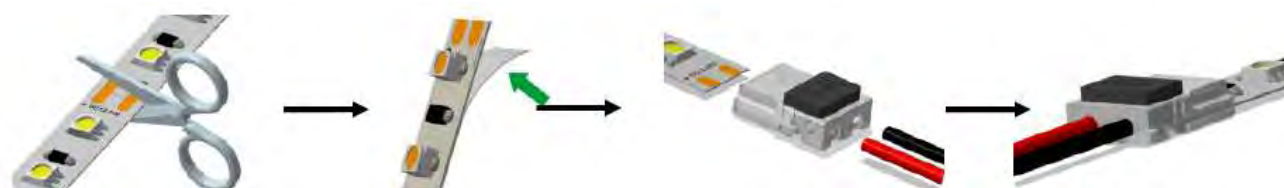

1. Cut the strip to required length at the terminals.

2. Peel a small section of the backing tape from the end of the strip where the join is required.

3. Insert the strip end into the slotted side and insert the tail wires into the holes on the opposite side.

4. Press hard on the back button on top of the connector. The button will snap down and secure the connections.

Strip to Strip



1. Cut the strip to required length at the terminals.

2. Peel a small section of the backing tape from the end of the strip where the join is required.

3. Insert the strip into each side of the connector.

4. Press hard on the back button on top of the connector. The button will snap down and secure the connections.



USJOINER-8

Beetle clip for 8mm LED strip to strip connection.
For single colour INDOOR strip.



USJOINER-8-C

Beetle clip for 8mm LED strip to wire connection.
For single colour INDOOR strip.



USJOINER-10

Beetle clip for 10mm LED strip to strip connection.
For single colour INDOOR strip.



USJOINER-10-C

Beetle clip for 10mm LED strip to wire connection.
For single colour INDOOR strip.

Hippo Clip LED Strip Joining System


Hippo clips are a new and no fuss method of joining LED strip lighting. They achieve a secure joint and electrical contact without the need for soldering which is time consuming and hazardous. Hippo clips are available for single colour, RGB and RGBW strips, are available for indoor and outdoor LED strip and come in strip to strip and strip to tail wire versions.



1. Cut the strip to your required length at the terminal markings.



2. Peel a small section of the backing tape from the end of the strip that the strip requiring joining.



3. Insert the strip into the slotted end of the Hippo clip until it is all the way in.



4. Snap down the cover and the connection will have been secured.



5. Repeat the process on the opposite side of the clip.



USLJOINER-8-OA

Hippo clip for 8mm LED strip to strip connection. For single colour OUTDOOR strip.



USLJOINER-8-OA-C

Hippo clip for 8mm LED strip to wire connection. Comes with AWG20 tail wire. For single colour OUTDOOR strip.



USLJOINER-10-OA

Hippo clip for 10mm LED strip to strip connection. For single colour OUTDOOR strip.



USLJOINER-10-OA-C

Hippo clip for 10mm LED strip to wire connection. Comes with AWG20 tail wire. For single colour OUTDOOR strip.



USLJOINER-RGB-I

Hippo clip for 10mm RGB LED strip to strip connection. For RGB INDOOR strip.



USLJOINER-RGB-C-I

Hippo clip for 10mm RGB LED strip to wire connection. For RGB INDOOR strip.



USLJOINER-RGB-OA

Hippo clip for 10mm RGB LED strip to strip connection. For RGB OUTDOOR strip.



USLJOINER-RGBW-I

Hippo clip for 12mm RGBW LED strip to strip connection. For RGBW INDOOR strip.



USLJOINER-RGBW-C-I

Hippo clip for 12mm RGBW LED strip to wire connection. For RGBW INDOOR strip.



USLJOINER-RGBW-OA

Hippo clip for 12mm RGBW LED strip to strip connection. For RGBW OUTDOOR strip.

LED Strip Accessories



USL-DC-STRIP-MC

LED strip DC male connector.



USL-DC-STRIP-FC

LED strip DC female connector.



USLJOINER-FM-1M

LED DC connector, female & male connector at both end.



USLJOINER

Single colour strip snap on butt connectors.



USLJOINERRGB

RGB strip snap on butt connectors.



USLJOINER-4WAY

Single colour strip snap on butt connectors for 2,3 or 4 way connections.



USLJOINER-C

Strip joiner for 10mm strip to power supply. Non-weatherproof 150mm cable.



USLJOINERRGB-C

RGB strip joiner for 10mm strip to power supply. Non-weatherproof 150mm cable.



USLJOINERFLEX

Strip joiner for 10mm strip to strip connection. Non-waterproof 150mm cable.



USL-CT-1D4D-300

LED strip 4 way connector female to 4 x male, with 300mm cable.



USL-CT-1D2D-300

LED strip 2 way connector female to 2 x male, with 300mm cable.



USL-CT-DD-1M

Female one way connector. Male DC connector connected with female DC connector, with 500mm cable.

Wi-Fi and Remote LED Strip Controllers

Wi-Fi units are controlled using the Smart Life App enabling you to control your lighting from any location with internet access. Also available is a remote control operated unit with a maximum operating range of 30 metres. Supply voltage is 12V or 24V DC. Must be powered with constant voltage drivers.



UCONTROLWIFI-W

- . Single colour Wi-Fi LED strip controller
- . Dimensions: W85 x W45 x H23mm
- . IP20
- . Finish: White
- . Voltage 12V - 24V, 1 channel <10A
- . 12V <120 watts, 24V <240 watts



UCONTROLWIFI-RGB-W

- . RGB Wi-Fi LED strip controller
- . Dimensions: W85 x W45 x H23mm
- . IP20
- . Finish: White
- . Voltage 12V - 24V, 5 channels <10A
- . 12V <120 watts, 24V <240 watts



UCONTROL-RGB-W

- . Remote control for RGB+W LED strip
- . Dimensions: W85 x W45 x H23mm
- . IP20
- . Finish: White
- . Voltage 12V - 24V, 4 channels <24A
- . 12V , 288 watts , 24V < 576 watts
- . 30 meter range

RGB LED Strip Booster



USL-RGBW-BOOSTER

- . RGB LED strip booster
- . IP20
- . Finish: White
- . 12V-24V, Output Current : < 24A
- . 12V < 288 watts , 24V < 576 watts

LED Strip Wall Mounted Dimmer / Controller



UCONTROL-WM-SIG


- . Single colour wall mounted controller
- . Dimensions: W86 x H86 x H12mm
- . Cut out: W66 x H66 x D24mm
- . IP20
- . Finish: White



UCONTROL-WM-RGBW


- . RGB wall mounted controller
- . Dimensions: W80 x H89 x H12mm
- . Cut out: W56 x H56 x D30mm
- . IP20
- . Finish: White

LED Strip Aluminium Profile

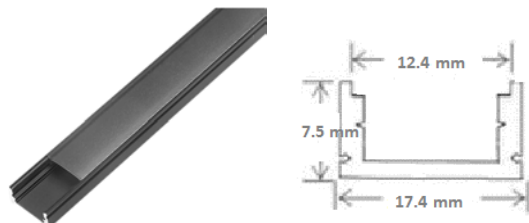

ULEDBAR-BLK-01-3M

- . Surface mounted black extrusion
- . Dimensions: W17.4 x H7.5 x L3000mm
- . Finish: Black with black diffuser
- . Complete with end caps, mounting clips & diffuser

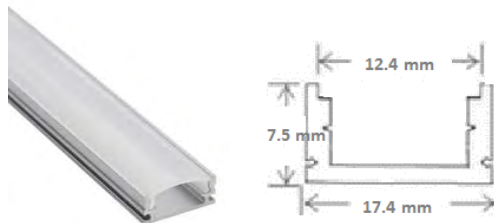


ULEDBAR-AL-01-2M

ULEDBAR-AL-01-3M

- . Surface mounted aluminium extrusion
- . Dimensions: W17.4 x H7.5 x L2000mm
W17.4 x H7.5 x L3000mm
- . Finish: Aluminium with opaque diffuser
- . Complete with end caps, mounting clips & diffuser





LED Strip Aluminium Profile

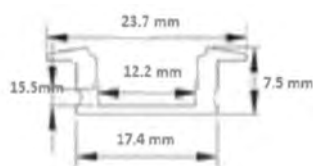



ULEDBAR-AL-02

- . Recessed aluminium extrusion
- . Dimensions: W17.4 x H7.5 x L2000mm
- . Finish: Aluminium with opaque diffuser
- . Complete with end caps, mounting clips & diffuser




ULEDBAR-AL-03

- . Surface mounted angled aluminium extrusion
- . Dimensions: W16 x H16 x L3000mm
- . Finish: Aluminium with opaque diffuser
- . Complete with end caps, mounting clips & diffuser




ULEDBAR-AL-04

- . Surface mounted aluminium extrusion
- . Dimensions: W17.4 x H15.7 x L2000mm
- . Finish: Aluminium with opaque diffuser
- . Complete with end caps, mounting clips & diffuser

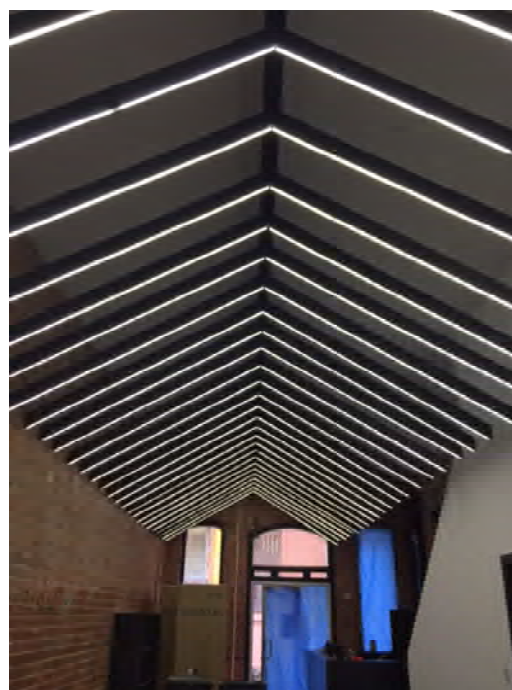

Custom Made Linear LED Aluminium Profile

Custom linear LED luminaires can be created by UGE to suit your individual and unique requirements. A range of profiles are available in recessed, surface mounted or suspended configurations. Custom linear LED luminaires can be joined in continuous runs and at a range of angles allowing for corner or even wall to ceiling joints. A range of different light options are available.

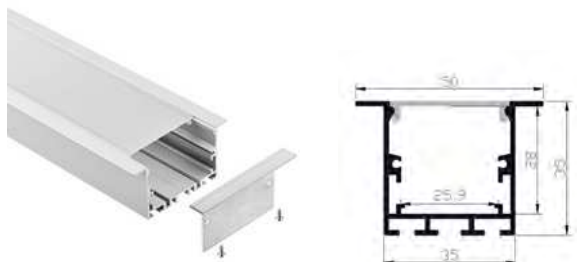


ULEDBAR-AL-05

- . Recessed aluminium extrusion
- . Dimensions: W35 x H35 x L3000mm
- . Finish: Aluminium with opaque diffuser
- . Complete with end caps, mounting clips & diffuser



ULEDBAR-AL-07


- . Suspended round aluminium extrusion
- . Dimensions: Ø60 x L3000mm
- . Finish: Aluminium with opaque diffuser
- . Complete with end caps, mounting clips & diffuser

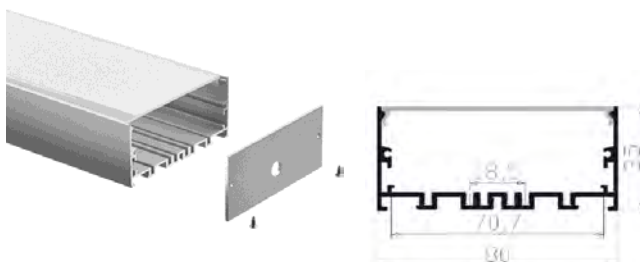

ULINEAR-8035-AL-3M

ULINEAR-8035-BLK-3M

- . Surface mounted or Suspended black extrusion
- . Dimensions: W80 x H35 x L3000mm
- . Finish: Aluminium / Black with opaque diffuser
- . Complete with end caps, mounting clips & diffuser

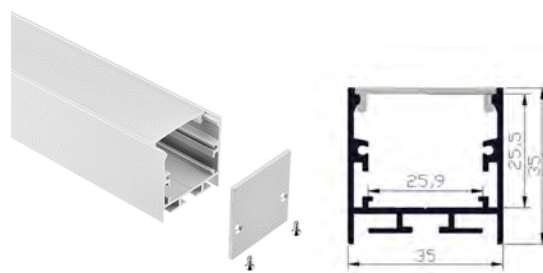


ULINEAR-3535-AL-3M

ULINEAR-3535-BLK-3M

- . Surface mounted or Suspended aluminium extrusion
- . Dimensions: W35 x H35 x L3000mm
- . Finish: Aluminium / Black with opaque diffuser
- . Complete with end caps, mounting clips & diffuser

Custom Made Linear LED Aluminium Profile


The 5070 profile is our full sized linear extrusion. It can be surface mounted or suspended and as with the other products in our linear extrusion range, can be joined in continuous lengths, or at angles by our team to your projects specifications. The 5070 profile is suited to a wide range of applications from task lighting in office projects to benchtop illumination in residential spaces.

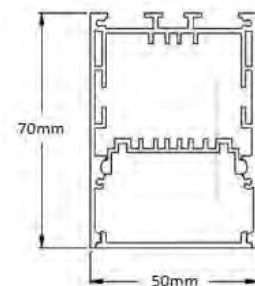

ULINEAR-5070-BLK

ULINEAR-5070-WH

- . Surface mounted or suspended aluminium extrusion
- . Dimensions: W50 x H70mm x L3000mm
- . Finish: Black / White
- . Complete with end caps, mounting clips & diffuser

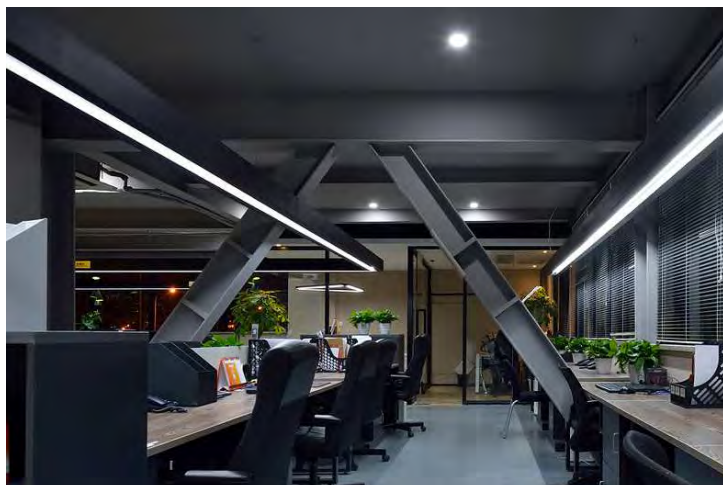

All ready made GAMMA range:

UGAMMA-BLK-1.2M

UGAMMA-BLK-1.8M

UGAMMA-BLK-2.4M

UGAMMA-BLK-3M

UGAMMA-WH-1.2M

UGAMMA-WH-1.8M

UGAMMA-WH-2.4M

UGAMMA-WH-3M

Single Circuit 3 Wire Track Light



UTRKB9BLK-3CCT

UTRKB9WH-3CCT

- . 9W LED single circuit track light
- . Dimensions: Ø43 x L120mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in LED 9W
- . Colour Temp: 3CCT, 3000K/4000K/5500K
- . Lumen: 630lm (3000K) / 720lm (4000K) / 675lm (5500K)
- . Beam Angle: 40°
- . Dimmable
- . Track system sold separately



UTRKB12BLK-WH

UTRKB12BLK-WW

UTRKB12WH-WH

UTRKB12WH-WW

- . 12W LED single circuit track light
- . Dimensions: Ø62 x L95mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in LED 12W
- . Colour Temp: 3000K / 5000K
- . Lumen: 720lm (3000K) / 830lm (5000K)
- . Beam Angle: 24° & 60°
- . Dimmable
- . Track system sold separately



Single Circuit 3 Wire Track Light



Recommended globe: **UGU10LED9W-WH-DIM**

UGU10LED9W-WW-DIM

UTRKGU10-BLK

UTRKGU10-WH

- . GU10 240V single circuit track light
- . Dimensions: Ø63 x L158mm
- . Finish: Matt Black / Matt White
- . Lamp base: 1 x GU10 60W Max (not incl.)
- . Track system sold separately



UTRKB15BLK-3CCT

UTRKB15WH-3CCT

- . 15W LED single circuit track light
- . Dimensions: Ø63 x L160mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in LED 15W
- . Colour Temp: 3CCT, 3000K/4000K/5500K
- . Lumen: 1120lm (3000K), 1160lm (4000K), 1140lm (5500K)
- . Beam Angle: 40°
- . Dimmable
- . CRI > 90
- . Track system sold separately



UTRKB25BLK-3CCT

UTRKB25WH-3CCT

- . 25W LED single circuit track light
- . Dimensions: Ø84 x L156mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in LED 25W
- . Colour Temp: 3CCT, 3000K/4200K/5500K
- . Lumen: 1800lm (3000K), 2000lm (4200K), 1900lm (5500K)
- . Beam Angle: 40°
- . Dimmable
- . Track system sold separately

Single Circuit 3 Wire Track Light

STEALTH



UTRKB15ADJ-BLK-WH

UTRKB15ADJ-BLK-WW

UTRKB15ADJ-WH-WH

UTRKB15ADJ-WH-WW

- . STEALTH 15W adjustable LED single circuit track light
- . Dimensions: Ø70 x L185mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in LED 15W
- . Colour Temp: 3000K / 5500K
- . Lumen: 1200lm
- . Beam Angle: 60°
- . Dimmable
- . CRI > 90
- . Track system sold separately



Can be modified to surface mounted:

USMB15ADJ-BLK-WH

USMB15ADJ-BLK-WW

USMB15ADJ-WH-WH

USMB15ADJ-WH-WW

Optional Extra:

UTRKB15ADJ-LENS-24 (24° lens)

UTRKB15ADJ-BAFFLE-GD (gold baffle)



Single Circuit 3 Wire Track Light

CYCLOP



UTRKB12ADJ-BLK-3CCT

UTRKB12ADJ-WH-3CCT

- . COYCLOP 12W adjustable & 359° rotatable LED track Light
- . Dimensions: Ø85 x H87mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in LED 12W
- . Colour Temp: 3000K / 4000K / 6000K
- . 978lm (3000K) / 1068lm (4000K) / 1042lm (6000K)
- . Beam Angle: 60°
- . Dimmable
- . CRI > 90
- . Track system sold separately



Can be modified to surface mounted:

USMB12ADJ-BLK-3CCT

USMB12ADJ-WH-3CCT

Single Circuit 3 Wire Surface Mounted Track System

UTRK1MTRACKB

UTRK1MTRACKW

UTRK1.5MTRACKB

UTRK1.5MTRACKW

UTRK2MTRACKB

UTRK2MTRACKW

UTRK3MTRACKB (picking up only)

UTRK3MTRACKW (picking up only)



. 240V single circuit 3 wire surface mounted track

. Complete with live end & dead end

. Available in 1M, 1.5M, 2M & 3M (3M picking up only)

. Finish: Black / White

. Dimensions: W35 x D18 x 1000mm

W35 x D18 x 1500mm

W35 x D18 x 2000mm

W35 x D18 x 3000mm



Single Circuit 3 Wire Surface Mounted Track Accessories



UTRK-LIVEEND-BLK

UTRK-LIVEEND-WH

- . Live end for power feed to start of track
- . Finish: Black / White



UTRK-DEADEND-BLK

UTRK-DEADEND-WH

- . End cap for terminating of track
- . Finish: Black / White



UTRK-STRAIGHT-JOINER-BLK

UTRK-STRAIGHT-JOINER-WH

- . Joiner for connection of track in straight lines
- . Finish: Black / White



UTRK-L-JOINER-BLK

UTRK-L-JOINER-WH

- . 90° corner connector for joining at right angles
- . Finish: Black / White



UTRK-F-JOINER-BLK

UTRK-F-JOINER-WH

- . Flexible joiner for connecting track sections at variable angles
- . Finish: Black / White



UTRK-LIVEJOINER-BLK

UTRK-LIVEJOINER-WH

- . Centre feed live joiner for connecting track in straight lines where power feed from centre is required
- . Finish: Black / White

Single Circuit 3 Wire Surface Mounted Track Accessories



UTRK-T-JOINER-BLK

UTRK-T-JOINER-WH

- . T shape joiner for connecting three sections into a T configuration
- . Finish: Black / White



UTRK-X-JOINER-BLK

UTRK-X-JOINER-WH

- . X shape joiner for connecting four sections into a cross configuration
- . Finish: Black / White



USUSPENSION-S15

- . 1.5M Hanging suspension wires
- . 4pcs / set
- . Suitable for single circuit track



USUSPENSION-S30

- . 3M Hanging suspension wires
- . 4pcs / set
- . Suitable for single circuit track

Single Circuit 3 Wire Recessed Track System & Accessories



UTRK-RS2M-BLK

UTRK-RS2M-WH

UTRK-RS3M-BLK (picking up only)

UTRK-RS3M-WH (picking up only)

SPECIFICATION

- . 240V single circuit 3 wire recessed track
- . Complete with live end & dead end
- . Available in 2M & 3M (3M picking up only)
- . Black / White
- . Dimensions: W59 x D17 x 2000mm
W59 x D17 x 3000mm



UTRK-STRAIGHT-JOINER-BLK

UTRK-STRAIGHT-JOINER-WH

SPECIFICATION

- . Joiner for connection of track in straight lines
- . Finish: Black / White



UTRK-RSLIVEEND-BLK

UTRK-RSLIVEEND-WH

SPECIFICATION

- . Live end for power feed to start of track
- . Finish: Black / White



UTRK-DEADEND-BLK

UTRK-DEADEND-WH

SPECIFICATION

- . End cap for terminating of track
- . Finish: Black / White



UTRK-RS-MB

SPECIFICATION

- . Mounting bracket for retaining recessed track

Three Circuit 4 Wire Track Light

UTRKB4-15BLK-3CCT

UTRKB4-15WH-3CCT



- . 15W LED three circuit track light
- . Dimensions: Ø63 x L160mm
- . Finish: Black / White
- . Lamp: Built-in LED 15W
- . Colour Temp: 3CCT, 3000K/4000K/5500K
- . Lumen: 1120lm (3000K), 1160lm (4000K), 1140lm (5500K)
- . Beam Angle: 40°
- . Dimmable
- . CRI > 90
- . Track system sold separately

UTRKB4-25BLK-3CCT

UTRKB4-25WH-3CCT



- . 25W LED three circuit track light
- . Dimensions: Ø84 x L156mm
- . Finish: Black / White
- . Lamp: Built-in LED 25W
- . Colour Temp: 3CCT, 3000K/4000K/5500K
- . Lumen: 1800lm (3000K), 2000lm (4000K), 1900lm (5500K)
- . Beam Angle: 40°
- . Dimmable
- . CRI > 90
- . Track system sold separately

Three Circuit 4 Wire Track Light



UTRKB4-35BLK-3CCT

UTRKB4-35WH-3CCT

- . 35W LED three circuit track light
- . Dimensions: Ø106 x L160mm
- . Finish: Black / White
- . Lamp: Built-in LED 35W
- . Colour Temp: 3CCT, 3000K/4000K/5500K
- . Lumen: 3250lm
- . Beam Angle: 38°
- . Dimmable
- . CRI > 90
- . Track system sold separately

Three Circuit 4 Wire Surface Mounted Track System



UTRK4W-1M-BLK

UTRK4W-1M-WH

UTRK4W-2M-BLK

UTRK4W-2M-WH

UTRK4W-3M-BLK (picking up only)

UTRK4W-3M-WH (picking up only)

- . 240V three circuit 4 wire surface mounted track
- . Live end & dead end not included, sold separately
- . Available in 1M, 2M & 3M (3M picking up only)
- . Black / White
- . Dimensions: W33 x D33 x 1000mm
W33 x D33 x 2000mm
W33 x D33 x 3000mm

Three Circuit 4 Wire Surface Mounted Track Accessories



UTRK4W-LIVE-BLK-L

UTRK4W-LIVE-WH-L

UTRK4W-LIVE-BLK-R

UTRK4W-LIVE-WH-R

- . Live end for power feed to start of three circuit track
- . Finish: Black / White



UTRK4W-DEADEND-BLK

UTRK4W-DEADEND-WH

- . Dead end for terminating three circuit track
- . Finish: Black / White



UTRK4W-STRAIGHTJOINER-BLK

UTRK4W-STRAIGHTJOINER-WH

- . Joiner for connection of three circuit track in straight lines
- . Finish: Black / White



UTRK4W-LIVEJOINER-BLK

UTRK4W-LIVEJOINER-WH

- . Centre feed live joiner for connecting three circuit track in straight lines where power feed from centre of track is required
- . Finish: Black / White

Three Circuit 4 Wire Surface Mounted Track Accessories



UTRK4W-LJOINER-BLK-L

UTRK4W-LJOINER-WH-L

UTRK4W-LJOINER-BLK-R

UTRK4W-LJOINER-WH-R

. 90° corner connector for joining three circuit track at right angles

. Finish: Black / White



UTRK4W-TJOINER-BLK

UTRK4W-TJOINER-WH

. Three way connector for three circuit track

. Finish: Black / White



UTRK4W-3ADP-BLK

UTRK4W-3ADP-WH

SPECIFICATION

. Adaptor for converting fittings for use in three circuit track

. Finish: Black / White



UTRK4W-XJOINER-BLK

UTRK4W-XJOINER-WH

. Four way connector for three circuit track

. Finish: Black / White



USUSPENSION-4WIRE-BLK

USUSPENSION-4WIRE-WH

. 3M Suspension kit for three circuit track (1pc)

. Finish: Black / White


Three Circuit 4 Wire Recessed Track System & Accessories



UTRK4W-RS3MTRK-BLK (picking up only)

UTRK4W-RS3MTRK-WH (picking up only)

- . 240V three circuit 4 wire recessed track
- . Live end & dead end not included, sold separately
- . Black / White
- . Dimensions: W33 x D33 x L3000mm



UTRK4W-RS-LJOINER-BLK-L

UTRK4W-RS-LJOINER-WH-L

UTRK4W-RS-LJOINER-BLK-R

UTRK4W-RS-LJOINER-BLK-R

- . 90° corner connector for joining recessed three circuit track at right angles
- . Finish: Black / White



UTRK4W-RSLIVEEND-BLK

UTRK4W-RSLIVEEND-WH

- . Live end for power feed into recessed three circuit track
- . Finish: Black / White



UTRK4W-DEADEND-BLK

UTRK4W-DEADEND-WH

- . Dead end for terminating three circuit track
- . Finish: Black / White

MAGNETICO Circular Track System & Accessories



UTRKM-CIRC900-BLK/WH/PB

UTRKM-CIRC1200-BLK/WH/PB

- . Magnetic circular track
- . Available in Ø900 / Ø1200mm
- . Finish: Matt Black / Matt White / Polished Brass
- . Made to order only, ETA 12 weeks



UTRKM10-BLK

UTRKM10-WH

UTRKM10-PB


- . 10W magnetic track spot light
- . Dimensions: Ø50 x L140mm
- . Finish: Matt Black / Matt White / Polished Brass
- . Lamp: Built-in LED 10W
- . Phase cut or 0-10V dimmable
- . Colour Temp: 3000K / 4000K / 5500K
- . Beam angle: 18/24/36°
- . Lumen: 800lm
- . CRI > 95
- . Made to order only, ETA 12 weeks



MAGNETICO Linear Track System & Accessories



TRACK series

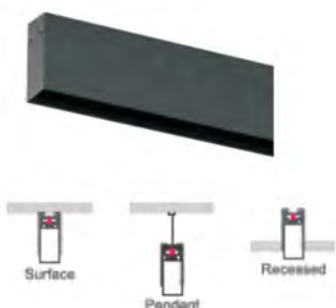**UMAG-TRAK-1/2/3M**

For recessed / surface / pendant installation

**UMAG-TRAKR-2/3M****DESCRIPTION**

24V profile for vertical and horizontal installation in plasterboard ceiling.

Recessed / Surface / Pendant mounted available in 1M, 2M & 3M. Complete with surface mounted kit and 2 end caps.

Recessed available in 2M & 3M. Complete with 2 end caps, male & female connectors at both ends.

Customizable dimensions available. Contact us for further details.

Model no.	Description	Dim	Color	Voltage	Power	Dimensions (mm)
UMAG-TRK-1M	Recessed/Surface/Pendant mounted 1M track	Yes	Sandy Black	24V	200W Max	L1000 x W39 x H76mm
UMAG-TRK-2M	Recessed/Surface/Pendant mounted 2M track	Yes	Sandy Black	24V	200W Max	L2000 x W39 x H76mm
UMAG-TRK-3M	Recessed/Surface/Pendant mounted 3M track	Yes	Sandy Black	24V	200W Max	L3000 x W39 x H76mm
UMAG-TRKR-2M	Recessed 2M track	Yes	Sandy Black	24V	200W Max	L2000 x W39 x H76mm
UMAG-TRKR-3M	Recessed 3M track	Yes	Sandy Black	24V	200W Max	L2000 x W39 x H76mm

MAGNETICO Linear Track System & Accessories

DOT series

**UMAG-DOT1BLK-WW**

(Made to order, ETA 12 weeks)

**UMAG-DOT3BLK-WW**

(Made to order, ETA 12 weeks)

**UMAG-DOT6BLK-WW****UMAG-DOT12BLK-WW****DESCRIPTION**

Magnetic DOT light made of aluminium.

Easy to install/move/replace by hand, doesn't need any tools.

Energy efficient LED with high CRI>95.

Deep anti-glare cut-off angle, soft light.

Power range: 2W/4W/8W/16W.

Phase cut or 0-10V dimmable. DALI dimmable optional.

Model no.	Power	Lumen	CCT	Beam	CRI	Source	Dim	Color	Voltage	Dimensions (mm)
UMAG-DOT1BLK-WW (Made to order, ETA 12 weeks)	2W	120lm	2700-6500K	12/34/48°	>95	Osram	Yes	Sandy Black /White	24V	L34 x W34 x H55.5mm
UMAG-DOT3BLK-WW (Made to order, ETA 12 weeks)	4W	380lm	2700-6500K	48°	>95	Osram	Yes	Sandy Black /White	24V	L83.5 x W34 x H55.5mm
UMAG-DOT6BLK-WW	8W	790lm	3000K	50°	>95	Osram	Yes	Sandy Black	24V	L163 x W34 x H55.5mm
UMAG-DOT12BLK-WW	16W	1550lm	3000K	51°	>95	Osram	Yes	Sandy Black	24V	L322 x W34 x H55.5mm

LINEAR series

**UMAG-BALANCE****DESCRIPTION**

Magnetic LINEAR light made of aluminum.

Flush with profile system, completely homogeneously illuminated, with PMMA cover.

Easy to install/move/replace by hand, no need any tools.

Energy efficient LED with high CRI>95.

Phase cut or 0-10V dimmable. DALI dimmable optional.

Model no.	Power	Lumen	CCT	Beam	CRI	Source	Dim	Color	Voltage	Dimensions (mm)
UMAG-BALANCE-7-BLK-WW	7W	500lm	3000K	diffuse	>95	Osram	Yes	Sandy Black	24V	L163 x W34 x H55.5mm
UMAG-BALANCE-26-BLK-WW	26W	1900lm	3000K	diffuse	>95	Osram	Yes	Sandy Black	24V	L640 x W34 x H55.5mm
UMAG-BALANCE-39-BLK-WW	39W	2850lm	3000K	diffuse	>95	Osram	Yes	andy Black	24V	L958 x W34 x H54mm

MAGNETICO Linear Track System & Accessories

PIVOT series

DESCRIPTION

Magnetic PIVOT light made of aluminium.

Fold design, light angle adjustable.

Easy to install/move/replace by hand, no need any tools.

Energy efficient LED with high CRI>95.

Phase cut or 0-10V dimmable. DALI dimmable optional.



UMAG-SCOOP4-BLK-WW



UMAG-SCOOP8-BLK-WW



UMAG-SCOOP16-BLK-WW

(Made to order, ETA 12 weeks)



UMAG-FOLD4-BLK-WW

(Made to order, ETA 12 weeks)



UMAG-FOLD8-BLK-WW

(Made to order, ETA 12 weeks)



UMAG-FOLD16-BLK-WW

(Made to order, ETA 12 weeks)

Model no.	Power	Lumen	CCT	Beam	CRI	Source	Dim	Color	Voltage	Dimensions (mm)
UMAG-SCOOP4-BLK-WW	4W	380lm	3000K	48°	>95	Osram	Yes	Sandy Black	24V	L84 x W34 x H181mm
UMAG-SCOOP8-BLK-WW	8W	790lm	3000K	48°	>95	Osram	Yes	Sandy Black	24V	L163.5 x W34 x H181mm
UMAG-SCOOP16-BLK-WW (Made to order, ETA 12 weeks)	16W	1550lm	2700-6500K	12/34/48°	>95	Osram	Yes	Sandy Black/White	24V	L322.5 x W34 x H181mm
UMAG-FOLD4-BLK-WW (Made to order, ETA 12 weeks)	4W	380lm	2700-6500K	diffuse	>95	Osram	Yes	Sandy Black/White	24V	L84 x W34 x H181mm
UMAG-FOLD8-BLK-WW (Made to order, ETA 12 weeks)	8W	790lm	2700-6500K	diffuse	>95	Osram	Yes	Sandy Black/White	24V	L163.5 x W34 x H181mm
UMAG-FOLD16-BLK-WW (Made to order, ETA 12 weeks)	16W	1550lm	2700-6500K	diffuse	>95	Osram	Yes	Sandy Black/White	24V	L322.5 x W34 x H181mm

MAGNETICO Linear Track System & Accessories

WALL WASHER series

DESCRIPTION**UMAG-WASHER13-BLK-WW**

Magnetic WALL WASHER light made of aluminium.

Flush with profile system, completely homogeneously illuminated, with PMMA cover.

**UMAG-WASHER27-BLK-WW**

Easy to install/move/replace by hand, no need any tools.

Energy efficient LED with high CRI>95.

**UMAG-WASHER40-BLK/WH**

(Made to order, ETA 12 weeks)

Phase cut or 0-10V dimmable. DALI dimmable optional.

Model no.	Power	Lumen	CCT	Beam	CRI	Source	Dim	Color	Voltage	Dimensions (mm)
UMAG-WASHER13-BLK-WW	8W	380lm	3000K	Wall washer	>95	Osram	Yes	Sandy Black	24V	L138 x W34 x H55.5mm
UMAG-WASHER27-BLK-WW	16W	880lm	3000K	Wall washer	>95	Osram	Yes	Sandy Black	24V	L270 x W34 x H55.5mm
UMAG-WASHER40-BLK/WH (Made to order, ETA 12 weeks)	24W	1260lm	2700-6500K	Wall washer	>95	Osram	Yes	Sandy Black/ White	24V	L400 x W34 x H55.5mm

OUT series

DESCRIPTION**UMAG-BALANCE-OUT13-BLK/WH**

(Made to order, ETA 12 weeks)

Magnetic OUT light made of aluminum.

Easy to install/move/replace by hand, no need any tools.

Energy efficient LED with high CRI>95.

**UMAG-DOT-OUT16-BLK/WH**

(Made to order, ETA 12 weeks)

Phase cut or 0-10V dimmable. DALI dimmable optional.

Model no.	Power	Lumen	CCT	Beam	CRI	Source	Dim	Color	Voltage	Dimensions (mm)
UMAG-BALANCE-OUT13-BLK-WW (Made to order, ETA 12 weeks)	13W	980lm	2700-6500K	12/34/48°	>95	Osram	Yes	Sandy Black/ White	24V	L320 x W34 x H110mm
UMAG-DOT-OUT16-BLK-WW (Made to order, ETA 12 weeks)	16W	1550lm	2700-6500K	12/34/48°	>95	Osram	Yes	Sandy Black/ White	24V	L320 x W34 x H110mm

MAGNETICO Linear Track System & Accessories

SPOT series

DESCRIPTION

Magnetic SPOT light made of aluminum.

Easy to install/move/replace by hand, no need any tools.

COB LED with maximum efficiency, no multiple shadows, high CRI>95.

Deep anti-glare cut-off angle, soft light.



UMAG-SPOT5-BLK-WW



UMAG-SPOT2X5-BLK-WW



UMAG-SPOT12-BLK-WW



UMAG-SPOT20-BLK-WW



UMAG-CUBE12-BLK



UMAG-ZOOM15-BLK/WH

(Made to order, ETA 12 weeks)

Model no.	Power	Lumen	CCT	Beam	CRI	Source	Dim	Color	Voltage	Dimensions (mm)
UMAG-SPOT5-BLK-WW	5W	440lm	3000K	36°	>95	Cree	Yes	Sandy Black	24V	Ø35 x W80mm
UMAG-SPOT2X5-BLK-WW	2 X 5W	880lm	3000K	40°	>95	Cree	Yes	Sandy Black	24V	Ø35 x W80mm
UMAG-SPOT12-BLK-WW	12W	870lm	3000K	36°	>95	Cree	Yes	Sandy Black	24V	Ø50 x W140mm
UMAG-SPOT20-BLK-WW	20W	1450lm	3000K	36°	>95	Cree	Yes	Sandy Black	24V	Ø70mm x W165mm
UMAG-CUBE10-BLK/WH (Made to order, ETA 12 weeks)	10W	880lm	2700K –6500K	15/24/36°	>95	Cree	Yes	Sandy Black /White	24V	W50 x L50mm x H140mm
UMAG-ZOOM15-BLK/WH (Made to order, ETA 12 weeks)	15W	905lm	2700K –6500K	15/24/36°	>95	Cree	Yes	Sandy Black /White	24V	Ø55mm x W140mm

MAGNETICO Linear Track System & Accessories

PENDANT series

DESCRIPTION**UMAG-GLOBAL-BLK-WW**

Magnetic pendant light.

Easy to install/move/replace by hand, doesn't need any tools.

COB LED with maximum efficiency, no multiple shadows, high CRI>95.

Cable length: 2000mm.

Phase cut or 0-10V dimmable. DALI dimmable optional.

**UMAG-PENDANT10-BLK-WW****UMAG-PENDANT10-BB-WW**

(Made to order, ETA 12 weeks)

**UMAG-P-GLOBAL-BLK/WH**

(Made to order, ETA 12 weeks)

**UMAG-P-HOOD-BLK/WH**

(Made to order, ETA 12 weeks)

**UMAG-HALO-DOT-18BLK/WH**

(Made to order, ETA 12 weeks)

**UMAG-HALO-BALANCE-18BLK/WH**

(Made to order, ETA 12 weeks)

Model no.	Power	Lumen	CCT	Beam	CRI	Source	Dim	Color	Voltage	Dimensions (mm)
UMAG-GLOBAL-BLK-WW	5W	290lm	3000K	/	>95	Osram	Yes	Sandy Black	24V	Ø150mm
UMAG-PENDANT10-BLK-WW	10W	780lm	3000K	36°	>95	Osram	Yes	Sandy Black	24V	Ø50 x L250mm, Cable: 2000mm
UMAG-PENDANT10-BB-WW (Made to order, ETA 12 weeks)	10W	780lm	3000K	36°	>95	Osram	Yes	Brush Brass	24V	Ø50 x L250mm, Cable: 2000mm
UMAG-P-GLOBAL-BLK/WH (Made to order, ETA 12 weeks)	5W	290lm	2700K-6500K	/	>95	Osram	Yes	Sandy Black/ White	24V	Ø150mm, Cable: 2000mm
UMAG-P-HOOD-BLK/WH (Made to order, ETA 12 weeks)	10W	480lm	2700K-6500K	/	>95	Osram	Yes	Sandy Black/ White	24V	Ø165mm, Cable: 2000mm
UMAG-HALO-DOT-18BLK/WH (Made to order, ETA 12 weeks)	18W	1750lm	2700K-6500K	20/34/48°	>95	Osram	Yes	Sandy Black/ White	24V	Ø164 x L102mm
UMAG-HALO-BALANCE-18BLK/WH (Made to order, ETA 12 weeks)	18W	1750lm	2700K-6500K	20/34/48°	>95	Osram	Yes	Sandy Black/ White	24V	Ø164 x L102mm

MAGNETICO Linear Track Accessories

Corner - For Surface Mounted Installation



UMAG-45D-CORNER-BLK/WH

(Made to order, ETA 12 weeks)

Surface mount 45D corner joiner

Finish: Sandy Black or Sandy White

Dimensions: W84 x L110 x H76mm



UMAG-CROSS-CORNER-BLK/WH

(Made to order, ETA 12 weeks)

Surface mount CROSS corner joiner

Finish: Sandy Black or Sandy White

Dimensions: W129 x L159 x H76mm



UMAG-T-JOINER-BLK/WH

(Made to order, ETA 12 weeks)

Surface mount T joiner

Finish: Sandy Black or Sandy White

Dimensions: W99 x L129 x H76mm



UMAG-L-JOINER-BLK/WH

(Made to order, ETA 12 weeks)

Surface mount L joiner

Finish: Sandy Black or Sandy White

Dimensions: W90 x L90 x H76mm



UMAG-INCORNER-BLK/WH

(Made to order, ETA 12 weeks)

Surface mount INNER corner joiner

Finish: Sandy Black or Sandy White

Dimensions: W123 x L123 x H76mm



UMAG-OUTCORNER-BLK/WH

(Made to order, ETA 12 weeks)

Surface mount OUTER corner joiner

Finish: Sandy Black or Sandy White

Dimensions: W123 x L123 x H76mm

Corner - For Recessed Installation



UMAG-L-RSJOINER-BLK/WH

(Made to order, ETA 12 weeks)

Recessed L joiner

Finish: Sandy Black or Sandy White

Dimensions: W109 x L109 x H123mm



UMAG-INCORNER-RSJOINER-BLK/WH

(Made to order, ETA 12 weeks)

Recessed INNER corner joiner

Finish: Sandy Black or Sandy White

Dimensions: W123 x L123 x H123mm



UMAG-OUTCORNER-RSJOINER-BLK/WH

(Made to order, ETA 12 weeks)

Recessed OUTER corner joiner

Finish: Sandy Black or Sandy White

Dimensions: W123 x L123 x H123mm

MAGNETICO Linear Track Accessories



UMAG-T-RSJOINER-BLK/WH

(Made to order, ETA 12 weeks)

Recessed T joiner

Finish: Sandy Black or Sandy White

Dimensions: W123 x L133 x H123mm



UMAG-DRIVERBOX-200W

(Made to order, ETA 12 weeks)

With a Meanwell UPH200, can connect to track profile directly, non-dimmable

Finish: Sandy Black or Sandy White

Dimensions: W374 x L39 x H76mm



UMAG-DRIVERBOX-60W

(Made to order, ETA 12 weeks)

With a Meanwell LPV-60, can connect to track profile directly, non-dimmable

Finish: Sandy Black or Sandy White

Dimensions: W341 x L39 x H76mm



UMAG-RS-BRACKET-BLK

Recessed mounting kit, inc 2 mounting brackets

Finish: Sandy Black

Dimensions: W99 x L38 x H68mm



UMAG-CANOPY-BLK

Suspension 3 meter with black electrical wire canopy set

Finish: Sandy Black

Dimensions: Ø80 x H40mm



UMAG-TRK-CONNECTOR

Track profile connection

Finish: Sandy Black

Dimensions: W130 x L33 x H3mm



UMAG-COVERPLATE

Electric connection with 2 pins

Finish: Sandy Black

Dimensions: W65 x L30mm



UMAG-DEADEND-BLK

End cap for magnetic track

Finish: Sandy Black

Dimensions: W76 x L39 x H2mm



UMAG-3PINJOINER

Pin connector for electric connection

Finish: Sandy Black

MAGNETICO Linear Track Accessories



UMAG-TRAK-COVER

Track cover 1 meter

Finish: Sandy Black

Dimensions: L1000mm x H2mm



UMAG-R-INPUT-TERMINAL

Input terminal for recessed magnetic track, includes pin connector, track connector and cable


Finish: Sandy Black or Sandy White



UMAG-INPUT-TERMINAL

Input terminal for magnetic track, includes pin connector, track connector and cable

Finish: Sandy Black or Sandy White

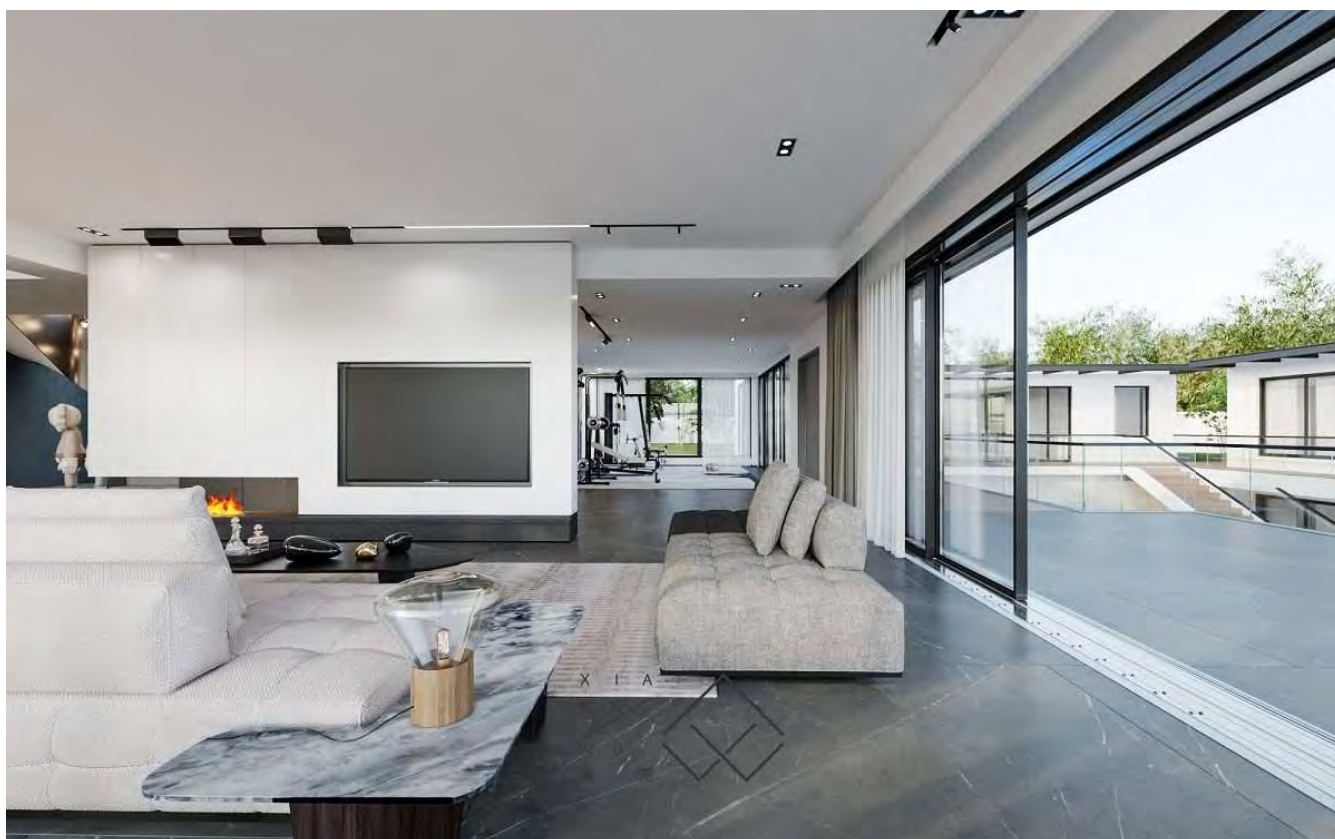

SLIMELINE LED Panel



UPANELB12X3-40W-3CCT

- . SLIMELINE LED panel 1200 x 300
- . Dimensions: L1195 x W295 x H9mm
- . Finish: White
- . LED: Built-in 40W LED
- . 3800lm, 3CCT 3000K / 4000K / 6000K
- . Complete with LED Driver and 3 pin flex & plug
- . Non dimmable



UPANEL6x6-40W-3CCT

- . SLIMELINE LED panel 600 x 600
- . Dimensions: L595 x W595 x H9mm
- . Finish: White
- . LED: Built-in LED 40W LED
- . 3800lm, 3CCT 3000K / 4000K / 6000K
- . Complete with LED Driver and 3 pin flex & plug
- . Non dimmable



UPANEL6X3-30W-WW

UPANEL6X3-30W-4K

UPANEL6X3-30W-NW

- . SLIMELINE LED panel 600 x 300
- . Dimensions: L595 x W295 x H9mm
- . Finish: White
- . LED: Built-in 30W LED
- . 3000lm, 3000K / 4000K / 6000K
- . Complete with LED Driver and 3 pin flex & plug
- . Non dimmable

BACKLIT LED Panel



UPANELB12X3-40W-3CCT

- . BACKLIT LED panel 1200 x 300
- . Dimensions: L1195 x W295 x H30mm
- . Finish: White
- . LED: Built-in 40W LED
- . 3800lm, 3CCT 3000K / 4000K / 6000K
- . Complete with LED driver and 3 pin flex & plug
- . Non dimmable
- . Can be recessed, not available in surface mounted



UPANELB6x6-40W-3CCT

- . BACKLIT LED panel 600 x 600
- . Dimensions: L595 x W595 x H30mm
- . Finish: White
- . LED: Built-in 40W LED
- . 3800lm, 3CCT 3000K / 4000K / 6000K
- . Complete with LED driver and 3 pin flex & plug
- . Non dimmable
- . Can be recessed, not available in surface mounted



LED Panel Accessories



LED PANEL SURFACE MOUNTED BRACKET

UPANEL-BKT12X3 (L1200 x W300 x H50mm)

UPANEL-BKT6X6 (L600 x W600 x H50mm)

UPANEL-BKT6X3 (L600 x W300 x H50mm)

Finish: White



RECESSED PLASTER CEILING FRAME

UPANEL-PRF12X3 (Cut out: L1210 x W310mm)

UPANEL-PRF6X6 (Cut out: L610 x W610mm)

UPANEL-PRF6X3 (Cut out: L610 x W310mm)

Finish: White



LED PANEL SUSPENSION WIRES

USUSPENSION-S15 (1500mm, 4pcs/set)

USUSPENSION-S30 (3000mm, 4pcs/set)


Finish: Stainless Steel



UPANELCLIPS


LED Panel Mounting Clip set of 4 pcs with screws (for surface mounted)

ELITE

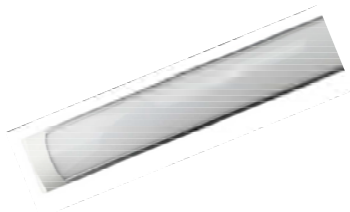

ULFB20-3CCT (600mm)


- . ELITE 20W LED batten
- . Dimensions: L600 x W76 x H31mm
- . Finish: Aluminium with polycarbonate cover
- . LED: Built-in 20W with SMD double LED strip
- . 3CCT, 3000K / 4000K / 5500K
- . 1400lm (3000K) / 1600lm (4000K) / 1500lm (5500K)
- . IP20
- . Non dimmable

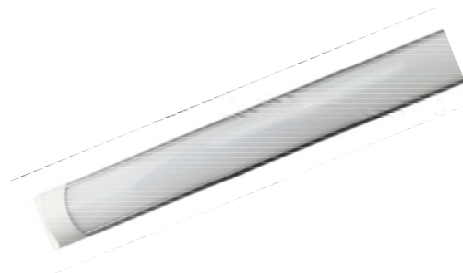

ULFB40-3CCT (1200mm)


- . ELITE 40W LED batten
- . Dimensions: L1200 x W76 x H31mm
- . Finish: Aluminium with polycarbonate cover
- . LED: Built-in 40W with SMD double LED strip
- . 3CCT, 3000K / 4000K / 5500K
- . 2880lm (3000K) / 3200lm (4000K) / 3100lm (5500K)
- . IP20
- . Non dimmable

SYNTHESIS



ULNB2/10-20W (600mm)


- . SYNTHESIS 20W LED batten
- . Dimensions: L582 x W81 x H50mm
- . Finish: Aluminium with polycarbonate cover
- . LED: Built-in 20W with SMD double LED strip
- . 2000lm 5500K
- . IP20
- . Non dimmable



ULNB2/10-40W (1200mm)


- . SYNTHESIS 40W LED batten
- . Dimensions: L1192 x W81 x H50mm
- . Finish: Aluminium with polycarbonate cover
- . LED: Built-in 40W with SMD double LED strip
- . 4000lm 5500K
- . IP20
- . Non dimmable

STYLED



USTYLED18-3CCT-DIM (600mm)

- . STYLED 18W LED batten
- . Dimensions: L600 x W76 x H31mm
- . Finish: Aluminium with polycarbonate cover
- . LED: Built-in 18W with SMD double LED strip
- . 3CCT, 3000K / 4000K / 5000K
- . 1500lm (3000K) / 1700lm (4000K) / 1600lm (5000K)
- . IP20
- . Phase cut dimmable



USTYLED36-3CCT-DIM (1200mm)

- . STYLED 2 x 18W LED batten
- . Dimensions: L1200 x W76 x H31mm
- . Finish: Aluminium with polycarbonate cover
- . LED: Built-in 36W with SMD double LED strip
- . 3CCT, 3000K / 4000K / 5000K
- . 3000lm (3000K) / 3400lm (4000K) / 3200lm (5000K)
- . IP20
- . Phase cut dimmable

PROLINE



ULEDLGTBAR-40W

- . PROLINE T-Bar troffer
- . Dimensions: L1195 x W295 x H55mm
- . Cut out: L1184 x W280mm
- . Finish: White
- . LED: Built-in 40W with double LED tube
- . 3300lm, 5500K
- . IP20
- . Non dimmable

TUFFLITE Weatherproof LED Batten



ULWP2/10-20W-3CCT (600mm)

- . TUFFLITE 20W LED weatherproof double LED strip
- . Dustproof and anti-corrosion
- . Dimensions: L620 x W102 x D83mm
- . Finish: White
- . LED: Built-in 20W SMD LED
- . 3CCT, 3000K / 4000K / 5500K
- . 2000lm
- . IP65
- . Non dimmable



ULWP2/20-40W-3CCT (1200mm)

- . TUFFLITE 40W LED weatherproof double LED strip
- . Dustproof and anti-corrosion
- . Dimensions: L1210 x W102 x D83mm
- . Finish: White
- . LED: Built-in 40W SMD LED
- . 3CCT, 3000K / 4000K / 5500K
- . 4000lm
- . IP65
- . Non dimmable

CONCEPT Weatherproof LED Batten



UCONCEPT1/18 (single tube)


- . CONCEPT 18W LED weatherproof with single LED tube
- . Dimensions: L1270 x W75 x H70mm
- . Finish: White
- . LED: 1 x 18W LED tube
- . 1700lm, 5500K
- . IP65
- . Non dimmable



UCONCEPT2/18 (double tube)

- . CONCEPT 36W LED weatherproof with double LED tube
- . Dimensions: L1290 x W112 x H58mm
- . Finish: White
- . LED: 2 x 18W LED tubes
- . 3400lm, 5500K
- . IP65
- . Non dimmable

MIA

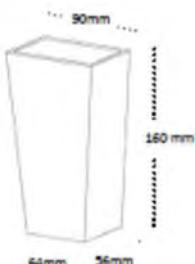


UOW048-WH-CW

UOW048-BLK-CW

- . MIA up down exterior LED wall light
- . Dimensions: W90 x L160 x D56mm
- . Finish: White / Black
- . Lamp: 2 x 5W built in LED
- . Lumen: 960lm 4000K
- . IP54
- . Non dimmable

REFOCUS SQUARE

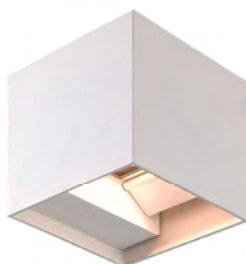


UWL42-WH-SQ-WW

UWL42-BLK-SQ-WW

- . REFOCUS square up down exterior LED wall light
- . Dimensions: W100 x L100 x D100mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 6W LED
- . Lumen: 550lm 3000K
- . IP65
- . Non dimmable

REFOCUS ROUND

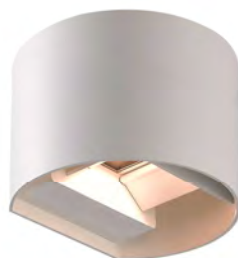

UWL42-WH-RD-WW

UWL42-BLK-RD-WW

- . REFOCUS round up down exterior LED wall light
- . Dimensions: W100 x Ø135 x P115mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 6W LED
- . Lumen: 550lm 3000K
- . IP65
- . Non dimmable

LOOP



UOW-LOOP-WH-WW

UOW-LOOP-BLK-WW

- . LOOP round surface mounted exterior LED wall light
- . Dimensions: Ø150 x H35.5mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 6W SMD LED
- . Lumen: 242lm, 3000K
- . IP54
- . Non dimmable

FUSION



UOW-FUSION-WH-WW

UOW-FUSION-BLK-WW

- . FUSION square surface mounted exterior LED wall light
- . Dimensions: W150 x L150 x H36mm
- . Finish: Matt white
- . Lamp: Built-in 6W SMD LED
- . Lumen: 242lm, 3000K
- . IP54
- . Non dimmable

SIENA



UOW-SIENA-WH-WW

UOW-SIENA-BLK-WW

- . SIENA rectangular surface mounted exterior LED wall light
- . Dimensions: W90 x L200 x H36mm
- . Finish: Matt white
- . Lamp: Built-in 6W SMD LED
- . Lumen: 242lm, 3000K
- . IP54
- . Non dimmable

CUBA



UOWCUBA-BLK-WH

UOWCUBA-BLK-WW

- . CUBE up down exterior LED wall light
- . Dimensions: W86 x L117 x H52mm
- . Finish: Matt black
- . Lamp: Built-in 2 x 6W LED
- . Lumen: 816lm 3000K, 860lm 4000K
- . IP54
- . Non dimmable

YAM



UOWYAM-WH

UOWYAM-WW

- . YAM up down exterior LED wall light
- . Dimensions: W108 x L120 x H240mm
- . Finish: Matt black
- . Lamp: Built-in 2 x 6W LED
- . Lumen: 816lm 3000K, 860lm 4000K
- . IP54
- . Non dimmable

REKA



UOWREKA-WH

UOWREKA-WW

- . REKA up down exterior LED wall light
- . Dimensions: W108 x L120 x H240mm
- . Finish: Matt black
- . Lamp: Built-in 2 x 6W LED
- . Lumen: 816lm 3000K, 860lm 4000K
- . IP54
- . Non dimmable

AXIL



UOW041COB-BLK-WW

- . AXIL downwards exterior LED wall light
- . Dimensions: W68 x L80 x D93mm
- . Finish: Matt black
- . Lamp: Built-in 5W LED
- . Lumen: 500lm 3000K
- . IP44
- . Non dimmable

ERIS



UOW043COB-BLK-WW

- . ERIS up down exterior LED wall light
- . Dimensions: W70 x L150 x D92mm
- . Finish: Matt black
- . Lamp: Built-in 2x5W LED
- . Lumen: 2 x 500lm 3000K
- . IP65
- . Non dimmable

QUANTUM



UOW044COB-BLK-WW

- . QUANTUM up down exterior LED wall light
- . Dimensions: W68 x L150 x D92mm
- . Finish: Matt black
- . Lamp: Built-in 2x5W LED
- . Lumen: 2 x 500lm 3000K
- . IP65
- . Non dimmable

STELLAR



UOW046-BLK-CW

UOW046-BLK-WW

- . STELLAR up down exterior LED wall light
- . Dimensions: W90 x L160 x D57mm
- . Finish: Matt black
- . Lamp: Built-in 2 x 5W LED
- . Lumen: 2 x 500lm 5000K / 2 x 450lm 3000K
- . IP65
- . Non dimmable

GU10 DOWNWARD



UOW041-BLK (Round)

UOW041-SLV Round)



UOW042-BLK (Square)

UOW042-SLV (Square)

- . Downwards only exterior wall light
- . Dimensions: W68 x L80 x D93mm
- . Finish: Sand black / Sand silver
- . Lamp: GU10 240V 35W Max. (not incl.)
- . IP44

GU10 UPWARD & DOWNWARD



UOW043-BLK (Round)

UOW043-SLV Round)



UOW044-BLK (Square)

UOW044-SLV (Square)

- . Up down exterior wall light
- . Dimensions: W68 x L150 x D93mm
- . Finish: Sand black / Sand silver
- . Lamp: 2 x GU10 240V 35W Max. (not incl.)
- . IP44

LINEAR



UOW045-BLK-CW

- . LINEAR up down exterior LED wall light
- . Dimensions: W55 x L220 x D130mm
- . Finish: Matt black
- . Lamp: Built-in 5W LED
- . Lumen: 450lm 4000K
- . IP65
- . Non dimmable

SIGMA



UE020UD-BLK-3CCT

UE020UD-WH-WW

- . SIGMA up down exterior LED wall light
- . Dimensions: L175 x H90 x D28mm
- . Finish: Matt black / Matt White
- . Lamp: Built-in 2x5W LED
- . Lumen: 2 x 500lm 3000K, 4000K & 5500K (Black)
2 x 500lm 3000K (White)
- . IP65
- . Non dimmable

SENTINEL



UOWSENTINEL-BLK-CW / UOWSENTINEL-BLK-WW

UOWSENTINEL-AL-CW / UOWSENTINEL-AL-WW

UOWSENTINEL-WH-CW / UOWSENTINEL-WH-WW

- . SENTINEL up down exterior LED wall light
- . Dimensions: W90 x L110 x D25mm
- . Finish: Texture Black / Aluminium / Texture White
- . Lamp: Built-in 2 x 5W LED
- . Lumen: 2 x 460lm 3000K / 2 x 475lm 5000K
- . IP65
- . Non dimmable

SIGMA



UE020S-AL-DL

UE020S-AL-WW

- . SIGMA Small downwards only exterior LED wall light
- . Dimensions: W110 x H75 x D40mm
- . Finish: CNC aluminium
- . Lamp: Built-in 1 x 3W LED
- . Lumen: 280lm 3000K / 300lm 5000K
- . IP54
- . Non dimmable



UE020L-AL-DL

UE020L-AL-WW

- . SIGMA Large downwards only exterior LED wall light
- . Dimensions: W155 x H75 x D45mm
- . Finish: CNC aluminium
- . Lamp: Built-in 1 x 6W LED
- . Lumen: 560lm 3000K / 600lm 5000K
- . IP54
- . Non dimmable



UE020UD-AL-DL

UE020UD-AL-WW

- . SIGMA Large up down exterior LED wall light
- . Dimensions: W155 x H75 x D45mm
- . Finish: CNC aluminium
- . Lamp: Built-in 2 x 6W LED
- . Lumen: 2 x 560lm 3000K / 2 x 600lm 5000K
- . IP54
- . Non dimmable

DELTA 018



UE018-AL

UE018-BLK

- . DELTA downwards only exterior LED wall light
- . Dimensions: W170 x H55 x D40mm
- . Finish: Machine pure aluminium / Matt Black
- . Lamp: Built-in 3 x 1W LED
- . Lumen: 280lm 3000K
- . IP54
- . Non dimmable

DELTA 019



UE019-AL

UE019-BLK

- . DELTA up down exterior LED wall light
- . Dimensions: W170 x H55 x D40mm
- . Finish: Machine pure aluminium / Matt Black
- . Lamp: Built-in 6 x 1W LED
- . Lumen: 560lm 3000K
- . IP54
- . Non dimmable

ABYSS



UBT7102AGU10-BLK

- . ABYSS adjustable exterior wall light
- . Dimensions: W78 x L172 x D57mm
- . Finish: Matt black
- . Lamp: GU10 35W Max. (not incl.)
- . IP54

KEJI



Recommended globe:

UST64-LED6W-ES-DIM

UOWKEJI-BLK

- . KEJI surface mounted exterior wall light
- . Dimensions: W70 x L280 x H120mm
- . Finish: Texture black
- . Lamp: 1 x E27 18W Max. (not incl.)
- . IP54
- . Can be mounted on vertical or horizontal

NIELSON



Recommended globe:

UST64-LED6W-ES-DIM

UOWNIELSON

- . NIELSON surface mounted exterior wall light
- . Dimensions: W98 x L148 x H284mm
- . Finish: Matt black
- . Lamp: 2 x E27 18W Max. (not incl.)
- . IP54

CUBE



UOWCUBE-WH

UOWCUBE-WW

- . CUBE surface mounted exterior LED wall light
- . Dimensions: W116 x L139 x H117mm
- . Finish: Matt black
- . Lamp: Built-in 5W LED
- . Lumen: 408lm 3000K, 435lm 4000K
- . IP54
- . Non dimmable

AGENTA A



UOW-AGENTA-A-BLK-WW

- . AGENTA A surface mounted exterior wall light
- . Dimensions: W55 x L130 x H30mm
- . Finish: Black
- . Lamp: Built-in 3.5W LED
- . Lumen: 150lm 3000K
- . IP54
- . Beam angle: 85°

AGENTA B



UOW-AGENTA-B-BLK-WW

- . AGENTA A surface mounted exterior wall light
- . Dimensions: W60 x L170 x H31.5mm
- . Finish: Black
- . Lamp: Built-in 6W LED
- . Lumen: 260lm 3000K
- . IP54
- . Beam angle: 85°

MERIDIAN



UOWMERIDIAN-BLK

- . MERIDIAN exterior LED wall light
- . Dimensions: L268 x W166 x D88mm
- . Finish: Matt black
- . Lamp: Built-in 8W LED
- . Lumen: 750lm 4000K
- . IP54
- . Non dimmable

ADELE



UOWADELE-BLK

- . ADELE exterior LED wall light
- . Dimensions: L268 x W166 x D88mm
- . Finish: Matt black
- . Lamp: Built-in 8W LED
- . Lumen: 750lm 4000K
- . IP54
- . Non dimmable

VISTA



UOWVISTA-SS

- . VISTA exterior wall light
- . Dimensions: L107 x W115 x D147mm
- . Finish: Stainless Steel
- . Lamp: 1 x GU10 35W Max (not incl.)
- . IP44

WEDGE



UE022-AL-WW

UE022-AL-NW

- . WEDGE 3W exterior LED wall light
- . Dimensions: W60 x L100 x D47mm
- . Finish: Machine pure aluminium
- . Lamp: Built-in 3W LED
- . Lumen: 280lm 3000K / 300lm 5000K
- . IP54
- . Non dimmable



UE024-AL-WW

UE024-AL-NW

- . WEDGE 9W exterior LED wall light
- . Dimensions: W100 x L180 x D70mm
- . Finish: Machine pure aluminium
- . Lamp: Built-in 9W LED
- . Lumen: 840lm 3000K / 900lm 5000K
- . IP54
- . Non dimmable

WEDGE copper



UBT9016-CP

- . WEDGE Copper exterior wall light
- . Dimensions: W70 x H145 x D70mm
- . Finish: Copper
- . Lamp: 1 x GU10 35W Max. (not incl.)
- . IP44



UE003-AL

- . GU10 downwards only exterior wall light
- . Dimensions: W65 x L93 x D85mm
- . Finish: Machine pure aluminium
- . Lamp: GU10 35W Max. (not incl.)
- . IP54



UE004-AL

- . GU10 up down exterior wall light
- . Dimensions: W65 x L185 x D85mm
- . Finish: Machine pure aluminium
- . Lamp: 2 x GU10 35W Max. (not incl.)
- . IP54

MAXIMO



UE006-AL

- . MAXIMO up down exterior wall light
- . Dimensions: W100 x L145 x D90mm
- . Finish: machine pure aluminium
- . Lamp: 2 x GU10 35W Max. (not incl.)
- . IP54

CUBE UNI



UE009-AL

- . CUBE UNI up down exterior wall light
- . Dimensions: W80 x L63 x D85mm
- . Finish: Machine pure aluminium
- . Lamp: 240V G9 35W Max. (not incl.)
- . IP54

BLOK



UE011-AL

- . BLOK adjustable exterior wall light
- . Dimensions: W90 x L80 x D150mm
- . Finish: Machine pure aluminium
- . Lamp: GU10 35W Max. (not incl.)
- . IP54

VISION



UE012-AL

- . VISION adjustable exterior wall light
- . Dimensions: W100 x L90 x D130mm
- . Finish: Machine pure aluminium
- . Lamp: GU10 35W Max. (not incl.)
- . IP54

BRADY



UE013-AL

- . BRADY exterior uplighter
- . Dimensions: W55 x L103 x D76mm
- . Finish: Machine pure aluminium
- . Lamp: GU10 35W Max. (not incl.)
- . IP54

SONAR



UE014-AL

- . SONAR up down exterior wall light
- . Dimensions: W55 x L155 x D76mm
- . Finish: Machine pure aluminium
- . Lamp: 2 x GU10 35W Max. (not incl.)
- . IP54

BLOK



UE016-AL

- . BLOK exterior uplighter
- . Dimensions: W56 x L85 x D85mm
- . Finish: Machine pure aluminium
- . Lamp: GU10 35W Max. (not incl.)
- . IP54

BLOK



UE017-AL

- . BLOK up down exterior wall light
- . Dimensions: W55 x L155 x D80mm
- . Finish: Machine pure aluminium
- . Lamp: 2 x GU10 35W Max. (not incl.)
- . IP54

OMEGA



UE021-AL

- . OMEGA rotatable exterior LED wall light
- . Dimensions: W80 x L80 x D40mm
- . Finish: Machine pure aluminium
- . Lamp: Built-in 3W LED
- . Lumen: 280lm 3000K
- . 350° rotational
- . IP54
- . Non dimmable

EMPIRE



UT004-SLV

UT004-BLK



UT004-AL

UT004-SLV

UT004-BLK

UT004-AL

- . EMPIRE exterior wall light
- . Dimensions: W60 x L150 x D90mm
- . Finish: Machine pure aluminium
- . Lamp: E14 base 40W Max. (not incl.)
- . IP44

PARIS



UOW-PARIS-BLK-4K (built-in LED 12W)

UOW-PARIS-BLK-E27 (E27 base, no lamp)

- . PARIS LED exterior bulkhead
- . Dimensions: Ø300 x H90mm
- . Finish: Matt black
- . Lamp: 12W 240V 4000K 1000lm (4K)
1 x E27 60W Max. (not incl.)
- . IP66/ IK10
- . Non dimmable

BARCELONA



UOW-BARCELONA-BLK-4K (built in LED 12W)

UOW-BARCELONA-BLK-E27 (E27 base, no lamp)

- . BARCELONA LED exterior bulkhead
- . Dimensions: Ø300 x H90mm
- . Finish: Matt black
- . Lamp: 12W 240v 4000K 650lm (4K)
1 x E27 60W Max. (not incl.)
- . IP66/ IK10
- . Non dimmable

METIS



UOWMETIS-A-BLK

- . METIS exterior LED wall light
- . Dimensions: L265 x H104 x D61mm
- . Finish: Matt black
- . Lamp: Built-in 2 x 5W LED
- . Lumen: 2 x 500lm 3000K
- . IP54
- . Non dimmable

JAZZ 12V



UWL43-WH-WW-KIT

UWL43-BLK-WW-KIT

- . JAZZ square exterior LED wall light
- . Dimensions: W55 x L55 x P42mm (without canister)
- . Cut out: Ø45mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 2.2W LED
- . Lumen: 180lm 3000K
- . IP65
- . Non dimmable
- . 700mA LED driver included

VOGUE 12V



UWL44-WH-WW-KIT

UWL44-BLK-WW-KIT

- . VOGUE round exterior LED wall light
- . Dimensions: Ø55 x P42mm (without canister)
- . Cut out: Ø45mm
- . Finish: Matt White / Matt Black
- . Lamp: Built-in 2.2W LED
- . Lumen: 180lm 3000K
- . IP65
- . Non dimmable
- . 700mA LED driver included

TRINITY



UOWTRINITY-S

UOWTRINITY-L

- . TRINITY exterior wall light
- . Dimensions: W175 x H480 x P220mm (S)
W200 x H530 x P255mm (L)
- . Finish: Antique Bronze with amber waved glass
- . Lamp: E27 60W Max. (not incl.)
- . IP44

KOLN



UBL76-BGE

- . KOLN exterior wall light
- . Dimensions: W160 x L330 x P90mm
- . Finish: Beige
- . Lamp: E27 60W Max. (not incl.)
- . IP44

CAMBRIDGE



U2003L-DOWN

- . CAMBRIDGE exterior wall light
- . Dimensions: W230 x L620 x P330mm
- . Finish: Black with Copper
- . Lamp: E27 60W Max. (not incl.)
- . IP44

COSMO



UBT9006-SLV

- . Dimensions: Ø100 x P50mm
- . Finish: Silver
- . Lamp: 12V G4 Bi Pin 20W Max. (not incl.)
- . IP44



UBT9007-SCH

- . Dimensions: Ø100 x P50mm
- . Finish: Brushed Chrome
- . Lamp: 12V G4 Bi Pin 20W Max. (not incl.)
- . IP44




UBT9007-SS-WW

UBT9007-SS-WH

- . Dimensions: Ø100 x P50mm
- . Finish: 304 Stainless Steel
- . Lamp: Built-in 1W LED 3000K / 5000K
- . IP44


Solar Bollard Lights

UOW-HELIOS-BLK

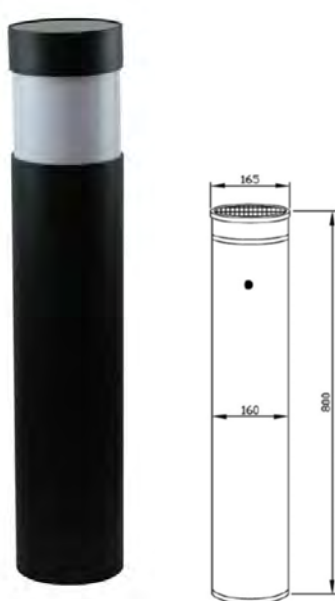

- . HELIOS solar powered bollard
- . Dimensions: Ø160 x H800mm
- . Finish: Matt Black
- . Aluminium body with black powder coating
- . Lamp: 1.8W Epistar LED
- . 236lm 3000K or 240lm 5000K
- . Salt spray corrosion tested
- . No cabling required
- . Solar panel: Grade A Mono Crystalline
- . Battery: 6.4V 5000mAh LiFePO₄
- . Charge time: 6 hours sunlight per day
- . Comes with remote control
- . Operating temperature: -15°C to 65°C
- . IP65

UOW-SOLIS-BLK

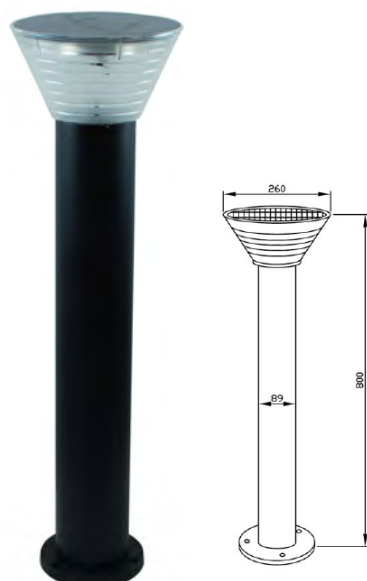

- . SOLIS solar powered bollard
- . Dimensions: Ø260 x H800mm, Base: Ø182mm
- . Finish: Matt Black
- . Aluminium body with black powder coating
- . Lamp: 3.5W Epistar LED
- . 410lm 3000K or 420lm 5000K
- . Salt spray corrosion tested
- . No cabling required
- . Solar panel: Grade A Mono Crystalline
- . Battery: 6.4V 5000mAh LiFePO₄
- . Charge time: 6 hours sunlight per day
- . Comes with remote control
- . Operating temperature: -15°C to 65°C
- . IP65

LED Bollard Lights



UOW-LORNE-BLK

- . LORNE commercial grade bollard
- . Dimensions: Ø160 x H1015mm
- . Finish: Matt Black
- . Aluminium body with black powder coating
- . Lens: Clear Polycarbonate
- . Lamp: Built-in 10W LED
- . 860lm 4000K
- . Comes with built in Osram 2835 LED chip and Meanwell driver
- . IP / IK Rating: IP65 / IK05



UOW-TORQUAY-BLK

- . TORQUAY commercial grade bollard
- . Dimensions: Ø160 x H1015mm
- . Finish: Matt Black
- . Aluminium body with black powder coating
- . Lens: Clear Polycarbonate
- . Lamp: Built-in 10W LED
- . 860lm 4000K
- . Comes with built in Osram 2835 LED chip and Meanwell driver
- . IP / IK Rating: IP65 / IK05

LED Bollard Lights



UOWDORSET-250-WW

- . DORSET 250mm 240V LED bollard
- . Dimensions: L100 x W70 x H250mm
- . Finish: Matt Black
- . Beam angle: 42°
- . Lamp: Built-in 7W LED
- . 130lm 3000K
- . IP54



UOWDORSET-650-WW

- . DORSET 650mm 240V LED bollard
- . Dimensions: L100 x W70 x H650mm
- . Finish: Matt Black
- . Beam angle: 42°
- . Lamp: Built-in 7W LED
- . 130lm 3000K
- . IP54



UOWLIZETTE-300-WH

UOWLIZETTE-300-WW

- . LIZETTE 300mm 240V LED bollard
- . Dimensions: L113 x W47 x H300mm
- . Finish: Matt Black
- . Beam angle: 90°
- . Lamp: Built-in 7W LED
- . 443lm 3000K / 487lm 4000K
- . IP54



UOWLIZETTE-750-WH

UOWLIZETTE-750-WW

- . LIZETTE 750mm 240V LED bollard
- . Dimensions: L113 x W47 x H750mm
- . Finish: Matt Black
- . Beam angle: 90°
- . Lamp: Built-in 7W LED
- . 443lm 3000K / 487lm 4000K
- . IP54

- . Material: Die cast aluminium body
- . Non Dimmable
- . Powder coated with pre-treated for coastal use
- . In-built LED lamp & driver

Bollard Lights



UOW-RIO445-BLK

UOW-RIO380-EXT-BK (Extension Rod)

- . RIO bollard
- . Dimensions: Ø60 x H445mm
- . Extension rod: Ø60 x H380mm
- . Finish: Matt Black
- . Aluminium body with black powder coating
- . Lens: 60mm High Clear Polycarbonate
- . Lamp base: GX5.3 12V (MR16) (not incl.)
- . IP54



UOW-OASIS800-BK

- . OASIS bollard
- . Dimensions: Ø100 x H800mm
- . Finish: Matt Black
- . Aluminium body with black powder coating
- . Lens: 85mm High Clear Polycarbonate with protective grill
- . Lamp base: E27 with space for an A60 globe (not incl.)
- . IP54



UGL104-BLK

- . MANLY bollard
- . Dimensions: Ø165 x H1000mm
- . Finish: Black
- . Aluminium body with black powder coating
- . Lamp base: E27 with space for an A60 globe (not incl.)
- . IP 44

Bollard Lights



UBT1006

- . Stainless Steel bollard
- . Dimensions: W125 x H1100mm
- . Finish: 304 stainless steel
- . Opal polycarbonate diffuser
- . Lamp base: E27 240V 40W Max. (not incl.)
- . IP44



UBT1006M

- . Stainless Steel bollard
- . Dimensions: W125 x H450mm
- . Finish: 304 stainless steel
- . Opal polycarbonate diffuser
- . Lamp base: E27 240V 40W Max. (not incl.)
- . IP44



UBT1006WL

- . Stainless Steel bollard
- . Dimensions: W125 x H378mm
- . Finish: 304 stainless steel
- . Opal polycarbonate diffuser
- . Lamp base: E27 240V 40W Max. (not incl.)
- . IP44

12V / 24V Pond Light



UBT7107-SS

SPECIFICATION

- . 12V / 24V underwater pond light
- . Dimensions: Ø95 x H150mm
- . Finish: 316 Stainless Steel
- . Lamp: 12V /24V MR16 50W Max. (not incl.)
- . Complete with 1M cable
- . IP68

12V LED Spike Lights



UBT9013-7BLK-WH

UBT9013-7BLK-WW

SPECIFICATION

- . 7W LED garden spike light
- . Dimensions: Ø56.5 x H323.5mm
- . Finish: Black powder coated
- . Lamp: Built-in 7W LED
- . 500lm 3000K / 550lm 4000K
- . Complete with 1M cable
- . IP67



UBT9013-12BLK-WH

UBT9013-12BLK-WW

SPECIFICATION

- . 12W LED garden spike light
- . Dimensions: Ø56.5 x H323.5mm
- . Finish: Black powder coated
- . Lamp: Built-in 12W LED
- . 700lm 3000K / 750lm 4000K
- . Complete with 1M cable
- . IP67

12V Spike Lights



UBT9011-BLK

UBT9011-CP

- . Dimensions: Ø60 x H415mm
- . Finish: Black / Copper
- . Lamp: 12V MR16 20W Max. (not incl.)
- . Complete with 1M cable
- . IP65



UBT9011-SS

- . Dimensions: Ø60 x H415mm
- . Finish: 316 Stainless Steel
- . Lamp: 12V MR16 20W Max. (not incl.)
- . Complete with 1M cable
- . IP65



UBT9003A-BLK

- . Dimensions: Ø75 x H300mm
- . Finish: Black powder coated
- . Lamp: 12V MR16 20W Max. (not incl.)
- . Complete with 1M cable
- . IP44



UBT9004A-SLV

- . Dimensions: Ø75 x H300mm
- . Finish: Silver powder coated
- . Lamp: 12V MR16 20W Max. (not incl.)
- . Complete with 1M cable
- . IP44

12V In Ground Uplighter



UIG001-BLK

UIG001-SS

- . Dimensions: Ø95 x H87mm (fitting only)
Ø95 x H130mm (with canister)
- . Cutout: Ø65mm (fitting only)
Ø87mm (with canister)
- . Finish: 316 Stainless Steel / Black
- . Flush clear lens
- . Lamp base: GX5.3 12V MR16 20W Max. (not incl.)
- . Complete with 900mm cable
- . IP65



UIG002-SS

- . Dimensions: W95 x L95 x H85mm
- . Cutout: Ø75mm
- . Finish: 316 Stainless Steel
- . Flush clear lens
- . Lamp base: GX5.3 12V MR16 20W Max. (not incl.)
- . Complete with 900mm cable
- . IP65

12V LED Deck Light



UIG-SS-EYELID



UIG-BLK-EYELID



UIG-1WH

UIG-1WW

- . Dimensions: W45 x L45 x H72mm
- . Cutout: Ø35mm
- . Finish: 304 Stainless Steel
- . Lamp: Built-in 1.5W 12V LED
- . 3000K / 5000K
- . Complete with 1M cable
- . IP65

UIG-SS-3-WH

UIG-SS-3-WW

UIG-BLK-3WH

UIG-BLK-3WW

- . Dimensions: Ø53 x H59mm (fitting only)
Ø53 x H80mm (with canister)
- . Cutout: Ø36mm (fitting only)
Ø46mm (with canister)

. Finish: 316 Stainless Steel / Black

. Lamp: Built-in 3W 12V LED

. 240lm 3000K / 270lm 5000K

. Complete with 1M cable

. IP67

. Can be converted to eyelid deck lights by using our EYELID covers (optional)



UIG007-BL (Blue LED)

. Dimensions: L62 x W62 x H98mm

. Cutout: Ø52mm

. Finish: 304 Stainless Steel

. Lamp: Built-in 1.5W 12V LED

. 150lm blue LED

. Complete with 1M cable

. IP64

. Available in kit of 3 lights (inc 3 way connector & driver)

MIGHTY LED Floodlight



UOW028W-BLK

- . MIGHTY 28W LED floodlight
- . Dimensions: L158 x W108 x P118mm
- . 2400lm 5000K
- . Finish: Black
- . IP 54
- . Suitable for use in coastal area
- . Non-dimmable



UOW028W-BLKSEN

UOW028W-SLVSEN

- . MIGHTY 28W LED floodlight with PIR sensor
- . Dimensions: L158 x W108 x P118mm
- . 2400lm 5000K
- . Finish: Black / Silver
- . IP 54
- . Suitable for use in coastal area
- . Non-dimmable

RADIUS Slimline LED Floodlight



UFL-30BLK-5K

- . RADIUS 30W Slimline LED floodlight
- . Dimensions: L161 x W124 x P30mm
- . 2600lm 5000K
- . Non-dimmable
- . IP65



UFL-50BLK-5K

- . RADIUS 50W Slimline LED floodlight
- . Dimensions: L207 x W161 x P32mm
- . 4400lm 5000K
- . Non-dimmable
- . IP65

METRO Slimline LED Floodlight



UFLSQLED10WW-BLK

UFLSQLED10WH-BLK

- . METRO 10W Slimline LED floodlight
- . Dimensions: L134.6 x W125 x P26.5mm
- . 700lm 3000K / 800lm 5000K
- . IP65
- . Non-dimmable



UFLSQLED20WW-BLK

UFLSQLED20WH-BLK

- . METRO 20W Slimline LED floodlight
- . Dimensions: L190 x W189.3 x P36.5mm
- . 1700lm 3000K / 1800lm 5000K
- . IP65
- . Non-dimmable



UFLSQLED30WW-BLK

UFLSQLED30WH-BLK

- . METRO 30W Slimline LED floodlight
- . Dimensions: L238 x W233.3 x P39.5mm
- . 2600lm 3000K / 2900lm 5000K
- . IP65
- . Non-dimmable

-
- . Material: Die cast aluminium body
 - . Non Dimmable
 - . Complete with 2M flex & 3 pin plug

- . Black finish
- . Beam angle: 120°

VENUS Slimline LED Floodlight



UOW018-LED50WH-BLK

- . VENUS 50W Slimline LED floodlight
- . Dimensions: L250 x W230 x P46mm
- . 5,000lm 5500K-6000K
- . LED chip: 60pcs x SMD3030
- . Material: Aluminium alloy & glass cover
- . IP65
- . Complete with 2M flex & 3 pin plug
- . Non-dimmable



UOW018-LED100WH-BLK

- . VENUS 100W Slimline LED floodlight
- . Dimensions: L286 x W267 x P56mm
- . 10,000lm 5500K-6000K
- . LED chip: 100pcs x SMD3030
- . Material: Aluminium alloy & glass cover
- . IP65
- . Complete with 2M flex & 3 pin plug
- . Non-dimmable



UOW018-LED150WH-BLK

- . VENUS 150W Slimline LED floodlight
- . Dimensions: L325 x W305 x P50mm
- . 15,000lm 5500K-6000K
- . LED chip: 140pcs x SMD3030
- . Material: Aluminium alloy & glass cover
- . IP65
- . Complete with 2M flex & 3 pin plug
- . Non-dimmable



UOW018-LED200WH-BLK

- . VENUS 200W Slimline LED floodlight
- . Dimensions: L382 x W362 x P61mm
- . 20,000lm 5500K-6000K
- . Material: Aluminium alloy & glass cover
- . IP65
- . Complete with 2M flex & 3 pin plug
- . Non-dimmable

MAGA LED Floodlight



UOW030-BLK

UOW030-SLV

- . MAGA 15W (Black) 13W (Silver) LED spot light
- . Dimensions: Ø76 x W100 x H119mm
- . 750lm 5500K
- . Finish: Black / Silver
- . IP44
- . Non-dimmable



UOW030SEN-BLK

UOW030SEN-SLV

- . MAGA 13W LED spot light with PIR sensor
- . Dimensions: Ø76 x W100 x H119mm
- . 750lm 5500K
- . Finish: Black / Silver
- . IP44
- . Non-dimmable



UOW031-BLK

UOW031L-BLK-WW

UOW031-SLV

- . MAGA 2 x 18W LED spot light
- . Dimensions: Ø85 x W101 x H120mm
- . 2 x 1300lm 3000K / 5500K
- . Finish: Black / Silver
- . IP44
- . Non-dimmable



UOW031LSEN-BLK-WH

UOW031LSEN-BLK-WW

UOW031SEN-SLV

- . MAGA 2 x 18W LED spot light with PIR sensor
- . Dimensions: Ø85 x W101 x H120mm
- . 2 x 1300lm 3000K / 5500K
- . Finish: Black / Silver
- . IP44
- . Non-dimmable


SUNLUX Solar LED Floodlight with Sensor



UFL-SOLAR-BLK

- . SUNLUX 2 x 6W solar floodlight with PIR sensor
- . Solar Panel Dimensions: L167 x W98 x P40mm
- . Product Dimensions: L216 x W177 x D113mm
- . 1100lm 5000K
- . Cable length: 5M
- . Detection range: 180°
- . Detection distance: 2-15M
- . Finish: Black
- . IP44

LED Floodlight Arms

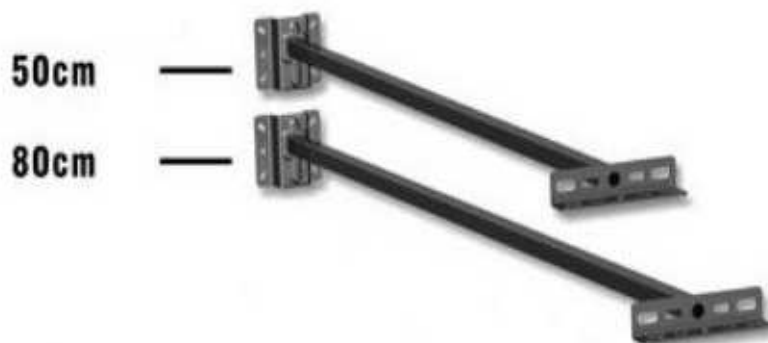

UBRACKET50-BLK

UBRACKET80-BLK

- . Arm length: 500mm & 800mm
- . Black powder coated finish suitable for outdoor applications
- . 500mm arm is suitable for 10W, 20W, 30W & 50W floodlights
- . 800mm arm is suitable for 100W, 150W & 200W floodlights

LED Highbay



UHB120W-5K

- . 120W UFO LED highbay
- . Dimensions: Ø400 x H220mm
- . 21,000lm 5000K
- . Finish: Black aluminium alloy
- . IP65
- . CRI > 80
- . Beam angle 120°
- . Non-dimmable
- . Operation temperature: -20°C to 45°C



UHB200W-WH

- . 200W LED highbay
- . Dimensions: Ø500 x H530mm
- . 19,500lm 5000K
- . Finish: Fin aluminium alloy
- . IP65
- . CRI > 80
- . Beam angle 120°
- . Non-dimmable
- . Operation temperature: -20°C to 45°C

12V Non-Dimmable Constant Voltage LED Drivers



UDRIVER12V-12W-I

12V DC 12W LED driver
IP20 indoor without flex & plug
W42 x H27 x L116mm
Non dimmable



UDRIVER12V-25W-I

12V DC 25W LED driver
IP20 indoor with flex & plug
W45 x H27 x L116mm
Non dimmable



UDRIVER12V-30W-OA

12V DC 30W LED driver
IP67 outdoor with flex & plug
W29 x H10 x L167mm
Non dimmable



UDRIVER12V-60W-OA

12V DC 60W LED driver
IP67 outdoor with flex & plug
W29 x H10 x L240mm
Non dimmable



UDRIVER12V-100W-OA

12V DC 100W LED driver
IP67 outdoor with flex & plug
W40 x H23 x L282mm
Non dimmable



UDRIVER12V-150W-OA

12V DC 150W LED driver
IP67 outdoor with flex & plug
W68 x H55 x L241mm
Non dimmable



UDRIVER12V-200W-OA

12V DC 200W LED driver
IP67 outdoor with flex & plug
W130 x H65 x L235mm
Non dimmable



UDRIVER12V-250W-OA

12V DC 250W LED driver
IP67 outdoor with flex & plug
W120 x H60 x L235mm
Non dimmable

12V Dimmable Constant Voltage LED Drivers



UDRIVER12V-30W-I-DIM

12V DC 30W dimmable LED driver
IP20 indoor with flex & plug
W47 x H29 x L133mm



UDRIVER12V-60W-I-DIM

12V DC 60W dimmable LED driver
IP20 indoor with flex & plug
W60 x H29 x L170mm



UDRIVER12V-90W-I-DIM

12V DC 90W dimmable LED driver
IP20 indoor with flex & plug
W68 x H39 x L211mm



UDRIVER12V-60W-OA-DIM

12V DC 60W dimmable LED driver
IP67 outdoor with flex & plug
W70 x H42 x L198mm



UDRIVER12V-150W-OA-DIM

12V DC 150W dimmable LED driver
IP67 outdoor with flex & plug
W68 x H42 x L224mm



UDRIVER12V-200W-OA-DIM

12V DC 200W dimmable LED driver
IP67 outdoor with flex & plug
W49 x H39 x L300mm

24V Non-Dimmable Constant Voltage LED Drivers



UDRIVER24V-25W-I

24V DC 25W LED driver

IP20 indoor with flex & plug

W45 x H27 x L116mm

Non dimmable



UDRIVER24V-50W-I

24V DC 50W LED driver

IP20 indoor with flex & plug

W45 x H27 x L140mm

Non dimmable



UDRIVER24V-80W-OA

24V DC 80W LED driver

IP67 outdoor with flex & plug

W40 x H22 x L257mm

Non dimmable



UDRIVER24V-100W-OA

24V DC 100W LED driver

IP67 outdoor with flex & plug

W40 x H23 x L282mm

Non dimmable



UDRIVER24V-150W-OA

24V DC 150W LED driver

IP67 outdoor with flex & plug

W71 x H45 x L209mm

Non dimmable



UDRIVER24V-200W-OA

24V DC 200W LED driver

IP67 outdoor with flex & plug

W71 x H45 x L240mm

Non dimmable



UDRIVER24V-300W-OA

24V DC 300W LED driver

IP67 outdoor with flex & plug

W95 x H50 x L275mm

Non dimmable

24V Dimmable Constant Voltage LED Drivers



UDRIVER24V-30W-I-DIM

24V DC 30W dimmable LED driver
IP20 indoor without flex & plug
W41 x H24 x L133mm



UDRIVER24V-60W-I-DIM

24V DC 60W dimmable LED driver
IP20 indoor without flex & plug
W50 x H29 x L170mm



UDRIVER24V-100W-I-DIM

24V DC 100W dimmable LED driver
IP20 indoor with flex & plug
W50 x H35 x L241mm



UDRIVER24V-150W-OA-DIM

24V DC 150W dimmable LED driver
IP67 outdoor with flex & plug
W50 x H35 x L300mm



UDRIVER24V-240W-OA-DIM

24V DC 240W dimmable LED driver
IP67 outdoor with flex & plug
W50 x H35 x L310mm



Recommended push button dimmer:

UDIMMER-350

Decorative LED Filament Lamps

Dimmable with reputable
trailing edge and
universal dimmers



UGLS-LED8W-ES-DIM

UGLS-LED8W-BC-DIM

- . GLS LED bulb
- . Clear glass
- . Dimensions: Ø60 x H108mm
- . 8W ES/BC base
- . 700lm 2200K
- . Dimmable



UST64-LED6W-ES-DIM

UST64-LED4W-BC-DIM

- . ST64 LED bulb
- . Clear glass
- . Dimensions: Ø64 x H145mm
- . 6W ES/ 4W BC base
- . 540lm /320ml 2200K
- . Dimmable



UST64-LEDSPIRAL5W-ES-DIM

- . ST64 spiral LED bulb
- . Amber glass
- . Dimensions: Ø64 x H142mm
- . 5W ES base
- . 300lm 2200K
- . Dimmable



UG95L-LED8W-ES-DIM

UG95L-LED4W-BC-DIM

- . G95 LED bulb
- . Clear glass
- . Dimensions: Ø95 x H135mm
- . 8W ES/ 4W BC base
- . 700lm / 540lm 2200K
- . Dimmable



UFR-R-CH-2W-ESWW-DIM

UFR-R-CH-2W-SESWW-DIM

- . Fancy round LED bulb
- . Crown Chrome
- . Dimensions: Ø45 x H75mm
- . 2W ES & SES base
- . 180lm 2200K
- . Dimmable



ULEDCAN4WL-ESWW-DIM

ULEDCAN4WL-SESWW-DIM

ULEDCAN4WL-BCWW-DIM

ULEDCAN4WL-SBCWW-DIM

- . Candle LED bulb
- . Dimensions: Ø35 x H98mm
- . 4W ES/SES/BC/SBC base
- . 400lm 2200K
- . Dimmable

Decorative LED Filament Lamps



UG125L-LED8W-ES-DIM

UG125L-LED4W-BC-DIM

- . G125 LED bulb
- . Clear glass
- . Dimensions: Ø125 x H180mm
- . 8W ES/ 4W BC base
- . 700lm / 540lm 2200K
- . Dimmable



UG125L-LEDSPIRAL5W-ES-DIM

- . G125 spiral LED bulb
- . Clear glass
- . Dimensions: Ø125 x H180mm
- . 5W ES base
- . 300lm 2200K
- . Dimmable



UG125R-CH-LED-8W-DIM

- . G125 Crown Chrome LED bulb
- . Crown Chrome
- . Dimensions: Ø125 x H180mm
- . 8W ES base
- . 700lm 2200K
- . Dimmable



UG125R-GD-LED-8W-DIM

- . G125 Crown Gold LED bulb
- . Crown Gold
- . Dimensions: Ø125 x H180mm
- . 8W ES base
- . 700lm 2200K
- . Dimmable

Dimmable with reputable
trailing edge and
universal dimmers

Recommended dimmers:



UDIMMER-250



UDIMMER-350

Opal LED Lamps



UFR5W-SESWW

- . Fancy round LED bulb
- . Frosted glass
- . Dimensions: Ø38 x H78mm
- . 5W SES base
- . 500lm 3000K
- . Non Dimmable



ULEDGLS10-ESWW-F

- . GLS LED bulb
- . Frosted glass
- . Dimensions: Ø60 x H108mm
- . 10W ES base
- . 900lm 2700K
- . Non Dimmable



ULEDGLS10-ESWW-DIM

- . GLS LED bulb
- . Frosted glass
- . Dimensions: Ø60 x H115mm
- . 10W ES base
- . 900lm 2700K
- . Dimmable



ULEDGLS11-BCWW

ULEDGLS13-BCWW

ULEDGLS13DIM-BCWW

- . GLS LED bulb
- . Frosted glass
- . Dimensions: Ø60 x H119mm
- . 11W / 13W BC base
- . 860lm / 1100lm 2700K
- . Non Dimmable & Dimmable



UG95-OP-6W-ES

UG95-OP-6W-BC

UG95-OP-6W-ES-DIM

- . G95 LED bulb
- . Frosted glass
- . Dimensions: Ø95 x H144mm
- . 6W ES/BC base
- . 540lm 2700K
- . Non Dimmable & Dimmable



UG125-OP-8W-ESWW-DIM

- . G125 LED bulb
- . Frosted glass
- . Dimensions: Ø125 x H180mm
- . 8W ES base
- . 700lm 2700K
- . Dimmable

LED Lamps



UT185L-LED6WE27DIM

- . T30 tubular LED bulb 185mm
- . Clear glass
- . Dimensions: Ø35 x H185mm
- . 6W ES base
- . 700lm 2200K
- . Dimmable



UT225L-LED4WE27DIM

- . T30 tubular LED bulb 225mm
- . Clear glass
- . Dimensions: Ø35 x H225mm
- . 4W ES base
- . 550lm 2200K
- . Dimmable



UT300L-LED6WE27DIM

- . T30 tubular LED bulb 300mm
- . Clear glass
- . Dimensions: Ø35 x H300mm
- . 6W ES base
- . 700lm 2200K
- . Dimmable



UQILED5S-WH

UQILED5S-WW

- . Q1 LED bulb 78mm
- . Clear glass
- . Dimensions: Ø25 x H78mm
- . 5W R7S base
- . 500lm 3000K / 6000K
- . Non Dimmable



UQILED10M-WH

UQILED10M-WW

- . Q1 LED bulb 118mm
- . Clear glass
- . Dimensions: Ø25 x H118mm
- . 10W R7S base
- . 900lm 3000K / 6000K
- . Non Dimmable



UQILED10M-WH-DIM

UQILED10M-WW-DIM

- . Q1 LED bulb 118mm dimmable
- . Clear glass
- . Dimensions: Ø25 x H118mm
- . 10W R7S base
- . 900lm 3000K / 6000K
- . Dimmable

LED Lamps



UG9LED5W-WH

UG9LED5W-WW

- . G9 240V 5W LED bulb clear
- . Clear glass
- . Dimensions: Ø15.8 x H55.1mm
- . 380lm 3000K / 420lm 6000K
- . Dimmable



UG9LED5WF-WH


UG9LED5WF-WW

- . G9 240V 5W LED bulb frosted
- . Frosted glass
- . Dimensions: W11 x L16 x H53mm
- . 380lm 3000K / 420lm 6000K
- . Dimmable



UPILOT-3W-WW-E14

- . Pilot 240V 3W LED bulb
- . Clear glass
- . Dimensions: Ø15 x H55mm
- . 230lm 3000K
- . Non Dimmable

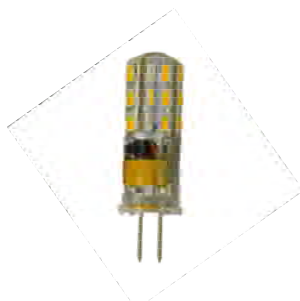

UBPLEDR1.5W-WH

UBPLEDR1.5W-WW


- . G4 Bi Pin 12V 1.5W LED bulb
- . Dimensions: Ø15 x H28mm
- . 100lm 3000K / 120lm 6000K
- . Non Dimmable
- . Retro fit, works on electronic transformer or LED driver



UBPLEDR4W-WH

UBPLEDR4W-WW

- . G4 Bi Pin 12V 4W LED bulb
- . Dimensions: Ø13 x H39mm
- . 320lm 3000K / 350lm 6000K
- . Non Dimmable
- . Retro fit, works on electronic transformer or LED driver



UBPLED1.6W-WH

UBPLED1.6W-WW

- . G4 Bi Pin 12V 1.6W LED bulb
- . Dimensions: L31 x W14 x H8.3mm
- . 100lm 3000K / 120lm 6000K
- . Non Dimmable
- . Works on LED driver only

LED Lamps



UCORN9ES-CW

UCORN9ES-WW

- . 12V ES base Corn LED bulb
- . Clear glass
- . Dimensions: Ø41 x H140mm
- . 700lm 3000K / 800lm 5000K
- . Non Dimmable



UT8LED18W-5K

- . T8 LED tube
- . Frosted glass
- . Dimensions: Ø26 x H1200mm
- . 1800lm 5000K
- . Non Dimmable



UR808WES-WH

UR808WES-WW

UR808WBC-WH

UR808WES-WW

- . R80 LED lamp
- . Frosted glass
- . Dimensions: Ø80 x H115mm
- . 720lm 3000K / 750lm 5500K
- . Non Dimmable



UGU10LED3W-WH

UGU10LED3W-WW

- . GU10 240V LED lamp
- . Single diode 3W
- . Dimensions: Ø48 x H46mm
- . 280lm 3000K / 320lm 5000K
- . Non Dimmable



UGU10LED5W-WH

UGU10LED5W-WW

- . GU10 240V LED lamp
- . Single diode 5W
- . Dimensions: Ø48 x H52mm
- . 360lm 3000K / 450lm 5000K
- . Non Dimmable



UGU10LED9W-WH-DIM

UGU10LED9W-WW-DIM

- . GU10 240V LED lamp
- . Single diode 9W
- . Dimensions: Ø50 x H57mm
- . 680lm 3000K / 720lm 5500K
- . Dimmable

12V LED Lamps



UMR11LED3W-WH
UMR11LED3W-WW

- . 12V MR11 LED lamp
- . Single diode 3W
- . Dimensions: Ø33 x H45mm
- . 140lm 3000K / 160lm 5000K
- . Non Dimmable
- . 12V LED driver required



UMR16LED3W-BL
UMR16LED3W-RED

- . 12V MR16 GU5.3 LED lamp
- . Single diode 3W
- . Dimensions: Ø48 x H46mm
- . 300lm Blue / Red
- . Non Dimmable
- . 12V LED driver required



UMR16LED3W-WH
UMR16LED3W-WW

- . 12V MR16 GU5.3 LED lamp
- . Single diode 3W
- . Dimensions: Ø48 x H46mm
- . 300lm 3000K / 5500K
- . Non Dimmable
- . 12V LED driver required



UMR16LED5W-WH
UMR16LED5W-WW

- . 12V MR16 GU5.3 LED lamp
- . Single diode 5W
- . Dimensions: Ø50 x H49mm
- . 420lm 3000K / 450lm 5500K
- . Non Dimmable
- . 12V LED driver required



UMR16S7-WH

- . 12V MR16 GU5.3 LED lamp
- . Single diode 7W
- . Dimensions: Ø50 x H76mm
- . 530lm 5500K
- . Non Dimmable
- . 12V LED driver required



UMR16S10-WH-DIM

- . 12V MR16 GU5.3 LED lamp
- . Single diode 10W
- . Dimensions: Ø50 x H97mm
- . 880lm 5500K
- . Dimmable
- . Retro fit, works on electronic transformer or LED driver

LED Mirror Light

**UMRR-ORB-RD750**

- . ORB 3CCT LED back lit mirror light with demister
- . Dimensions: Ø750 x D30mm
- . Finish: Mirror
- . Built-in 30W LED
- . 3CCT, 3000K / 4000K / 5000K
- . Dimmable
- . Comes with on / off touch screen
- . 2 year warranty

**UMRR-RD-700CLR**

- . Round LED mirror light with demister
- . Dimensions: Ø700 x D50mm
- . Finish: Mirror glass with opaque PVC
- . Built-in 35W LED
- . 3CCT, 3000K / 4000K / 6000K
- . Dimmable
- . Comes with on / off touch screen
- . 2 year warranty

**UMRR-HRT1180**

- . Frameless Horizontal LED mirror light with demister
- . Dimensions: W1180 x L740 x D30mm
- . Finish: Mirror / Opaque glass / Metal Trim
- . Built-in 80W LED
- . 3CCT, 3000K / 4000K / 6400K
- . Dimmable
- . Comes with on / off touch screen
- . 2 year warranty

LED Mirror Light

**UMRR-HVRT-900CLR**

- . Frameless Vertical or Horizontal LED mirror light
- . Dimensions: W900 x L600 x D35mm
- . Finish: Mirror / Opaque glass / Metal Trim
- . Built-in 40W LED
- . 3CCT, 3000K / 4000K / 6400K
- . Dimmable
- . Comes with on / off touch screen
- . 2 year warranty

UMRR-HRT-900CLR / UMRR-HRT-1200CLR

- . Horizontal rectangular LED mirror light with demister
- . Dimensions: W900 x L750 x D50mm
W1200 x L750 x D50mm
- . Finish: Mirror glass with opaque PVC
- . Built-in 35W / 40W LED
- . 3CCT, 3000K / 4000K / 5000K
- . Dimmable
- . Comes with on / off touch screen
- . 2 year warranty


UMRR-HRTMG1180

- . Frameless Horizontal LED mirror light with magnifying glass & demister
- . Dimensions: W1180 x L740 x D30mm
- . Finish: Mirror / Opaque glass / Metal Trim
- . Built-in 80W LED
- . 3CCT, 3000K / 4000K / 6400K
- . Dimmable
- . Comes with on / off touch screen
- . 2 year warranty


Recessed & Surface Mounted Emergency Lights




UEM-5W




UEM-3W-BLK



UEMSM-3W



UEMSM-3W-BLK




- . Recessed or Surfaced Mounted non-maintained LED emergency luminaire
- . For use at doorway, stairway, corridors & intersection on an emergency escape route
- . Compliant to AS/NZS2293 with D40 / D40 classification
- . Cut out: UEM-5W (Ø70-150mm), UEM-3W-BLK (Ø70-130mm)
- . Easy installation via 2 pin flex & plug
- . 2 hour duration during power outage
- . Energy efficient high output 3W / 5W
- . High density storage LiCoO2 batteries

CLASSIFICATION & SPACING DISTANCE

Plane	Class	Mounting Height In Metres								
		2.1	2.4	2.7	3.0	3.6	4.0	4.5	5.0	6.0
C0	D40	16.7	17.4	18.0	18.6	19.6	20.1	20.8	21.3	22.1
C90	D40	16.7	17.4	18.0	18.6	19.6	20.1	20.8	21.3	22.1

Recessed & Surface Mounted Exit Lights

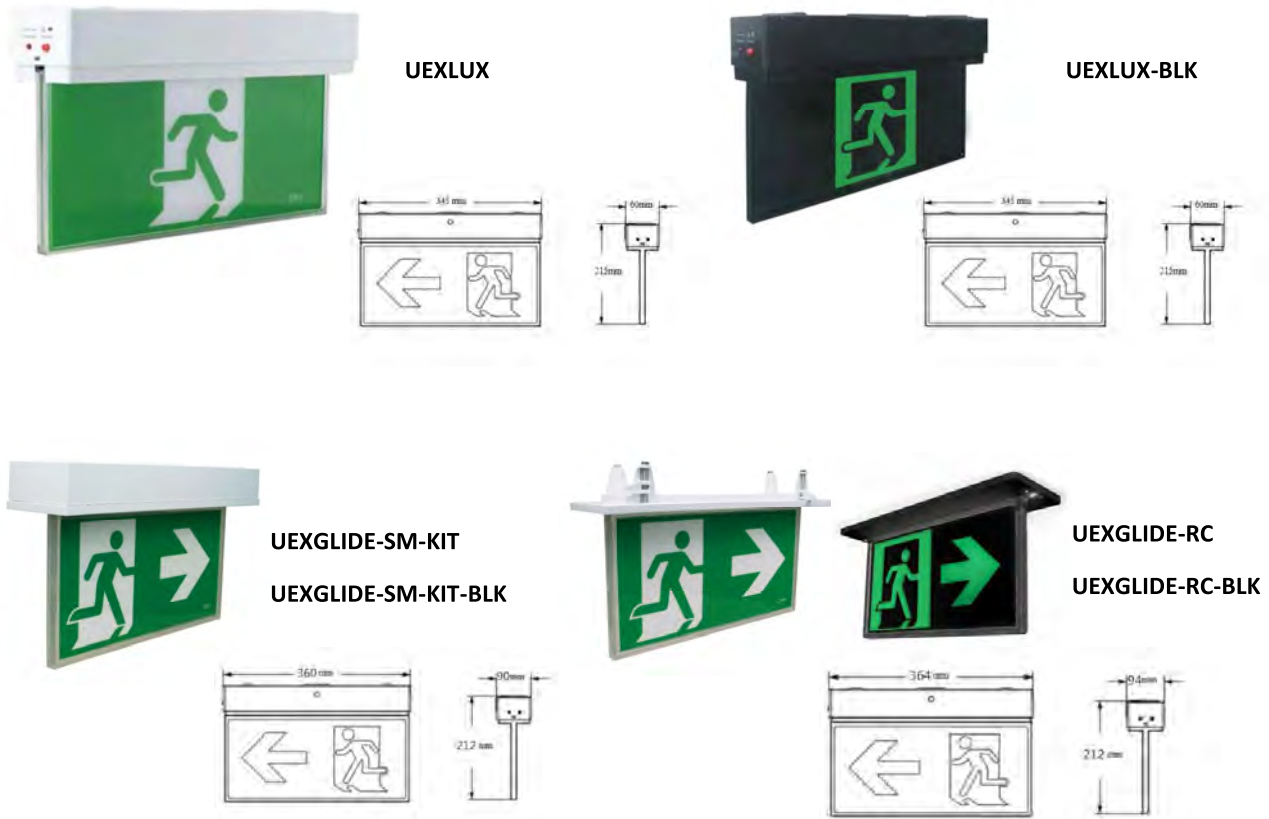

- . Maintained operation
- . Complete with set of running man or running man with arrow decals
- . Recessed or surface mounted version available
- . Can be used at doorway, stairway, corridors and intersection on an emergency route escape



CLASSIFICATION & SPACING DISTANCE


		Mounting Height In Metres								
Plane	Class	2.1	2.4	2.7	3.0	3.6	4.0	4.5	5.0	6.0
C0	E5.0	6.6	7.2	7.4	7.8	8.0	8.2	8.4	8.4	8.2
C90	E2.0	5.2	5.2	5.4	5.0	4.6	4.8	4.0	-	-

Weatherproof LED Emergency Light



UEMWP2/20-40W-3CCT

- . Maintained / Non-Maintained weatherproof surface mounted SMD LED strip emergency light
 - . Corrosion resistant, self extinguish polycarbonate body
 - . UV stabilised high impact polycarbonate cover
 - . Stainless steel mounting clips for easy installation
 - . High density storage LiCoO2 batteries
 - . Emergency driver tested and compliant with SAA
 - . 2 hours emergency operation
-
- . Dimensions: L1220 x W100 x D78mm
 - . Finish: polycarbonate with opal diffuser
 - . Power: 2 x 20W LED
 - . IP rating: IP65
 - . Charging time: 16 hours

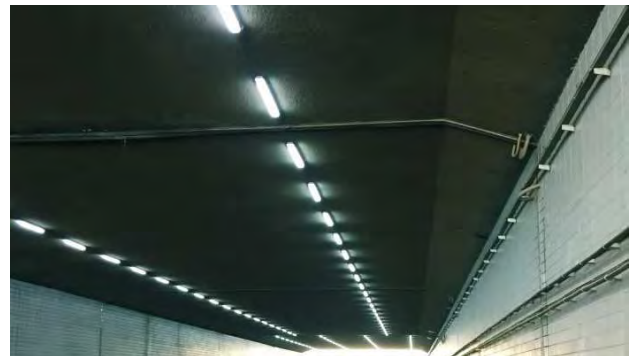

FONTE Round & Square Exhaust Fan



UMXRD8-WH (8")

UMXRD10-WH (10")



. FONTE round exhaust fan

. Air flow: 270m³/hr (8") & 320m³/hr (10")

. Dimensions: Ø270mm x D200mm (8") & Ø325mm x D200mm (10")

. Round Cut out: Ø240mm (8") & Ø292mm (10")

. Finish: White

. Complete with flex & plug

UMXSQ8-WH (8")

UMXSQ10-WH (10")

UMXSQ8-SS (8")

UMXSQ10-SS (10")



. FONTE square exhaust fan

. Air flow: 270m³/hr (8") & 320m³/hr (10")

. Dimensions: L270 x W270 x D200mm (8") & L325 x W325 x D200mm (10")

. Round Cut out: Ø240mm (8") & Ø292mm (10")

. Finish: White / Stainless Steel

. Complete with flex & plug



FONTE Round Exhaust Fan with LED Light

UMXRD8LED-WH

- . FONTE exhaust fan with LED light
- . Air flow: 270m³/hr
- . Dimensions: Ø270 x H195mm
- . Round Cut out: Ø240mm
- . Air outlet diameter: Ø100mm
- . Finish: White
- . Complete with flex & plug
- . Lamp: 10W LED 4000K, beam angle: 100°
- . Lumen: 800lm



FONTE exhaust fan with LED light is an exhaust fan that suitable for bathroom, toilet and laundry area. It features 30W energy efficient ball bearing motor with high air extraction power up to 270m³/hr.

- . Enclosed housing prevents dust re-entry from ceiling cavity
- . Quick and easy fan installation
- . Absorbs odour & steam quietly
- . Side ducted with draft stopper
- . Power cord included

3 IN 1 - Exhaust Fan, 2 Heat Lamps & Light



UVENTH2LS



UVENTH2LW

- . Powerful exhaust fan helps eliminate bathroom steam
- . Generate an airflow of 240 cubic meter per hour
- . Include 1.5M of flexible side ducting, outlet grill and 3 gang slimline switch
- . Dimensions: W440 x L240mm
- . Cut out: W345 x L190mm
- . 2 x 275W infra red lamps
- . Finish: Stainless Steel / White

3 IN 1 - Exhaust Fan, 4 Heat Lamps & Light



UVENTH4LS



UVENTH4LW

- . Powerful exhaust fan helps eliminate bathroom steam
- . Generate an airflow of 240 cubic meter per hour
- . Include 1.5M of flexible side ducting, outlet grill and 3 gang slimline switch
- . Dimensions: W370 x L370mm
- . Cut out: W290 x L290mm
- . 4 x 275W infra red lamps
- . Finish: Stainless Steel / White

OBLIQUE 30

UOYS-30BLK-3CCT

UOYS-30WH-3CCT



- . OBLIQUE 30W round sleek design oyster light
- . Dimensions: Ø350 x H65mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in 30W LED
- . 3CCT, 3000K / 4000K / 6000K
- . Lumen: 2980lm (3000K) / 3430lm (4000K) / 3300lm (6000K)
- . CRI > 80
- . Dimmable
- . 110° beam angle
- . IP20

OBLIQUE 48

UOYS-48BLK-3CCT

UOYS-48WH-3CCT

- . OBLIQUE 48W round sleek design oyster light
- . Dimensions: Ø600 x H65mm
- . Finish: Matt Black / Matt White
- . Lamp: Built-in 48W LED
- . 3CCT, 3000K / 4000K / 6000K
- . Lumen: 4770lm (3000K) / 5472lm (4000K) / 5280lm (6000K)
- . CRI > 80
- . Dimmable
- . 110° beam angle
- . IP20



NOVA 15

UOYS15WH-3CCT



- . NOVA 15W slimline oyster light
- . Dimensions: Ø200 x H48mm
- . Finish: White
- . Material: Polycarbonate with PC diffuser
- . Lamp: Built-in 15W LED
- . 3 CCT, 3000K / 4000K / 5000K
- . Lumen: 1300lm (3000K) / 1500lm (4000K) / 1400lm (5000K)
- . CRI > 80
- . Dimmable
- . 110° beam angle
- . IP54

NOVA 28

UOYS28WH-3CCT

UOYS28AL-3CCT

- . NOVA 28W slimline oyster light
- . Dimensions: Ø300 x H40mm
- . Finish: White frame / Aluminium frame
- . Material: Polycarbonate with PC diffuser
- . Lamp: Built-in 28W LED
- . 3CCT, 3000K / 4000K / 5000K
- . Lumen: 2400lm (3000K) / 2600lm(4000K) / 2500lm (5000K)
- . CRI > 80
- . Dimmable
- . 110° beam angle
- . IP54



Flush Mounted LED Oyster



UFMOYS18DIM-WW

- . Dimensions: Ø225 x H35mm
- . Finish: Matt White
- . Lamp: Built-in 18W LED 3000K
- . Lumen: 1440lm
- . CRI > 80
- . Dimmable
- . 120° beam angle
- . IP20



UFMOYS24DIM-WW

- . Dimensions: Ø295 x H35mm
- . Finish: Matt White
- . Lamp: Built-in 24W LED 3000K
- . Lumen: 1750lm
- . CRI > 80
- . Dimmable
- . 120° beam angle
- . IP20



Recommended dimmers:

UDIMMER-250 (Rotary dimmer)

UDIMMER-350 (LED push button dimmer)

LED MODULE for Oysters



UMODULE15W-WH-KIT

UMODULE15W-WW-KIT

- . Dimensions: Ø177mm
- . 15W LED 3000K / 6000K
- . Lumen: 650lm (3000K) / 750lm (6000K)
- . CRI > 80
- . Non Dimmable
- . IP20



UMODULE20W-WH-KIT

UMODULE20W-WW-KIT

- . Dimensions: Ø227mm
- . 20W LED 3000K / 6000K
- . Lumen: 850lm (3000K) / 1000lm (6000K)
- . CRI > 80
- . Non Dimmable
- . IP20



UMODULE28W-WH-KIT

UMODULE28W-WW-KIT

- . Dimensions: Ø267mm
- . 28W LED 3000K / 6000K
- . Lumen: 1150lm (3000K) / 1380lm (6000K)
- . CRI > 80
- . Non Dimmable
- . IP20

ESTELLE Round



UCMRD-EST

- . ESTELLE round crystal ceiling mount
- . Dimensions: Ø460 x H265mm
- . Finish: Chrome base with crystal
- . Lamp: 5 x G9 240V, 35W Max. (not incl.)

ESTELLE Square



UCMSQ-EST

- . ESTELLE square crystal ceiling mount
- . Dimensions: W420 x L420 x H265mm
- . Finish: Chrome base with crystal
- . Lamp: 5 x G9 240V, 35W Max. (not incl.)

CELESTE



UCMR016

- . CELESTE round crystal ceiling mount
- . Dimensions: Ø450 x H480mm
- . Finish: Chrome base with crystal
- . Lamp: 5 x GU10, 50W Max. (not incl.)



Recommended globe: UGU10LED5W-WH/WW

ESTELLE DIY Series



UBFRD-EST

- . ESTELLE round crystal batten fix
- . Dimensions: Ø250 x H230mm
- . Finish: Chrome base with crystal
- . Lamp: 1 x ES base (not incl.)



UBFSQ-EST

- . ESTELLE square crystal batten fix
- . Dimensions: W250 x L250 x H230mm
- . Finish: Chrome base with crystal
- . Lamp: 1 x ES base (not incl.)

PULSAR



UCM-PULSAR

- . PULSAR round crystal ceiling mount
- . Dimensions: Ø350 x H280mm
- . Finish: Smoky glass with crystal
- . Lamp: 3 x G9 240V, 25W Max. (not incl.)


Also available in Pendant version: **UPPULSAR-SMK**

SQUIGGLE



UP-SQUIGGLE-SB

- . SQUIGGLE LED pendant light
- . Dimensions: W1500mm
- . Built-in 55W LED
- . Finish: Satin Brass
- . Dimmable

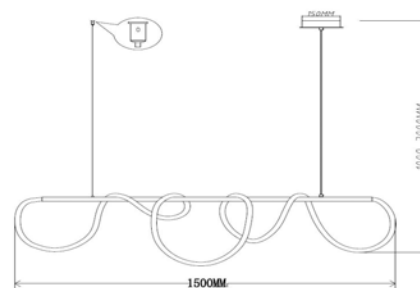

An intricate suspended pendant which you can customise the flexible LED tubing around the SQUIGGLE luminaire to create the look you desire and all hand made to perfection. Its sober and sincere appearance means it is perfect for use in contemporary space and will definitely generate artistic impression.

Replica FLOS IC Ball



UP-FLOS-20GLD / UP-FLOS-30GLD

- . Replica FLOS IC frosted ball pendant light
- . Dimensions: Ø200 x H720mm / Ø300 x H720mm
- . Cable length: 2000mm
- . Finish: Satin brass + Opal glass
- . Lamp: 1 x E27 15W LED Max. (not incl.)



We also have Wall Light, Table Lamp & Floor Lamp versions

OREKA



UPOREKA-3 (3 lights)

- . OREKA 3 light pendant
- . Dimensions: L800 x H1580 x W45mm
- . Rod Length: 1500+400+300+150=1500mm (adjustable)
- . Finish: Black rod with satin brass lamp holder
- . Lamp: 3 x E27 40W Max. (not incl.)



UPOREKA-5 (5 lights)

- . OREKA 5 light pendant
- . Dimensions: L1100 x H1580 x W45mm
- . Rod Length: 1500+400+300+150=1500mm (adjustable)
- . Finish: Black rod with satin brass lamp holder
- . Lamp: 3 x E27 40W Max. (not incl.)



SOLARISE

UPSOLARISE-200-SB (Ø200mm)

UPSOLARISE-300-SB (Ø300mm)

- . SOLARISE pendant light
- . Dimensions: Ø200 / Ø300
- . Cable length: 2000mm
- . Finish: Satin Brass with black cloth cable
- . Lamp: 1 x E27 40W Max. (not incl.)

ILLIMITE MODULAR PENDANT



ILLIMITE can be connected into an almost limitless arrangements. Some concepts are shown below.

Item Code	Description	Colours	Illustration
UILLIMITE-1P	ILLIMITE pendant, Cable length: 3000mm, Canopy: Ø60 x H85mm, Lamp Holder: Ø60 x H70mm	Black, White or Brushed Brass	
UILLIMITE-ADP1P	ILLIMITE 1 hole adaptor for bar connection	Black, White or Brushed Brass	
UILLIMITE-ADP2P-180	ILLIMITE adaptor for bar connection 2 x 180° opposing holes	Black, White or Brushed Brass	
UILLIMITE-ADP2P-90	ILLIMITE adaptor for bar connection 2 x 90° right angle holes	Black, White or Brushed Brass	
UILLIMITE-ADP3	ILLIMITE adaptor for bar connection with 3 holes "T"	Black, White or Brushed Brass	
UILLIMITE-ADP4	ILLIMITE adaptor for bar connection with 4 holes for cross	Black, White or Brushed Brass	
UILLIMITE-PLATE-200	ILLIMITE 200mm pendant plate	Black, White, Brushed Brass or Smoke Glass	200mm
UILLIMITE-PLATE-300	ILLIMITE 300mm pendant plate	Black, White, Brushed Brass or Smoke Glass	300mm
UILLIMITE-ROD	ILLIMITE connecting rod for adaptors. Used to create limitless patterns of arrangement. Come in 1500mm lengths	Black, White or Brushed Brass	



ILLIMITE adaptor Ø60mm
Black, White or Brushed Brass



ILLIMITE plates Ø200 / Ø300mm
Black, White, Brushed Brass or Smoke Glass



ILLIMITE joining bars
Black, White or Brushed Brass

DOTT



UP-DOTT300-SB

UP-DOTT300-BLK

- . DOTT pendant light
- . Dish Dimensions: Ø300mm (optional)
- . Opal glass dimension: Ø120mm
- . Cable Length: 3000mm
- . Finish: Satin Brass / Black
- . Material: Metal with frosted glass
- . Lamp: 1 x G9 40W Max. (not incl.)

Dish is optional

UP-DOTT300-PLATE-SB

UP-DOTT300-PLATE-BLK

Replica CROWN

UPR-CROWN-BLK

UPR-CROWN-GLD

- . Replica CROWN pendant light
- . Dimensions: Ø800 x H500mm
- . Cable Length: 1500mm
- . Finish: Black / Gold
- . Material: Metal with frosted glass
- . Lamp: 12 x G9 40W Max. (not incl.)

Recommended LED globes:

UG9LED5WF-WH/WW

UG9LED5W-WH/WW



CURVOR



UP-CURVOR-60 (Ø600mm)

UP-CURVOR-90 (Ø900mm)

UP-CURVOR-120 (Ø1200mm)

. CURVOR LED pendant light

. Dimensions: W45 x H65mm x Ø600 / Ø900 / Ø1200mm

. Cable length: 3000mm

. Finish: Black / Gold / Satin Brass

. LED wattage: Built-in LED, Ø600mm = 36W, Ø900mm = 54W, Ø1200mm = 72W

. LED Colour temperature: 3000K Warm White

. Beam Angle: 120°

ORIO



UP-ORIO-BLK

- . ORIO LED black pendant light
- . Dimensions: Ø750 x H120mm
- . Cable length: 2000mm
- . Finish: Matt Black
- . Material: Metal & Acrylic ring
- . LED wattage: Built-in 21 x 3W
- . LED Colour temperature: 3000K Warm White
- . 36° rotation and 90° tilt
- .Phase cut dimmable

ELLISSE



UP-ELLISSE300 (Ø300mm, made to order, ETA 10 weeks)

UP-ELLISSE400 (Ø400mm, made to order, ETA 10 weeks)

UP-ELLISSE600 (Ø600mm)

UP-ELLISSE800 (Ø800mm)

- . ELLISSE LED crystal pendant light
- . Dimensions: Ø300 / Ø400 / Ø600 / Ø800mm
- . Cable length: 3000mm
- . Finish: Crystal + Metal
- . LED wattage: Built-in LED, Ø600mm = 30W, Ø800mm = 50W
- . LED Colour temperature: 3000K Warm White
- . Dimmable

SLIMLINE RING



URINGSLIM-40-BLK

URINGSLIM-60-BLK

URINGSLIM-80-BLK

- . SLIMLINE RING pendant single
- . Dimensions: Ø400 / Ø600 / Ø800mm x H15mm
- . Cable length: 4000mm
- . Finish: Black metal
- . Built-in LED, Ø400mm = 20W, Ø600mm = 30W, Ø800mm = 40W
- . Lumen: 974lm / 1461lm / 1948lm
- . LED Colour temperature: 3000K Warm White



URINGSLIM-4+6-BLK

- . SLIMLINE RING pendant duo
- . Dimensions: Ø400 + Ø600 x H15mm
- . Cable length: 4000mm
- . Finish: Black metal
- . Built-in LED 20W + 30W
- . Lumen: 974lm + 1461lm
- . LED Colour temperature: 3000K Warm White



URINGSLIM-4+6+8-BLK

- . SLIMLINE RING pendant trio
- . Dimensions: Ø400 + Ø600 + Ø800 x H15mm
- . Cable length: 4000mm
- . Finish: Black metal
- . Built-in LED 20W + 30W + 40W
- . Lumen: 974lm + 1461lm + 1948lm
- . LED Colour temperature: 3000K Warm White

WEB



UP3805S

UP3805M

UP3805L

- . WEB pendant light
- . Dimensions: Ø450 (S)/ Ø650 (M) / Ø900mm (L)
- . Cable length: 4000mm
- . Finish: Stainless Steel
- . Built-in LED 42 x 0.3W (S), 92 x 0.3W (M), 162 x 0.3W (L)
- . LED Colour temperature: 3000K Warm White



UP3805SQ-S

UP3805SQ-L

- . Rectangular WEB pendant light
- . Dimensions: L970 x W263 x H250mm (S)
L1510 x W315 x 307mm (M)
- . Cable length: 4000mm
- . Finish: Stainless Steel
- . Built-in LED 156 x 0.3W (S), 192 x 0.3W (L)
- . LED Colour temperature: 3000K Warm White



UP3805Oval

- . Oval WEB pendant light
- . Dimensions: Ø750 x H330mm
- . Cable length: 4000mm
- . Finish: Stainless Steel
- . Built-in LED 162 x 0.3W
- . LED Colour temperature: 3000K Warm White

SOHO



UPSOHO-SMK

- . SOHO smoke glass pendant light
- . Dimensions: L900 x H200mm
- . Cable length: 2000mm
- . Ceiling plate: Ø80mm, black metal
- . Finish: Black rod with smoky glass
- . Lamp: 8 x G9 10W Max. (not incl.)

Recommended LED globes:

UG9LED5WF-WH/WW

UG9LED5W-WH/WW



Replica JASON MILLER



UPRJM-10

- . Replica JASON MILLER smoke glass pendant light
- . Dimensions: L1040 + W910 x H510mm
- . Rod length: 600mm (2x150mm, 1x300mm)
- . Finish: Matt Black metal with smoky glass
- . Lamp: 10 x E27 20W Max. (not incl.)

Recommended LED globe:

UFR-R-CH-2W-ESWW-DIM



We also have Wall Light version



Replica LINDSEY ADELMAN




UPR-LINDSEY-8-BLK

- . Replica LINDSEY ADELMAN smoke glass 8 light pendant
- . Dimensions: L1700 x W800 x H600mm
- . Rod length: 3 x300mm for variable drop height
- . Finish: Black with smoky glass
- . Lamp: 8 x E27 40W Max. (not incl.)

UPR-LINDSEY-3-BLK

- . Replica LINDSEY ADELMAN smoke glass 3 light pendant
- . Dimensions: L1160 x H480mm
- . Rod length: 3 x300mm for variable drop height
- . Finish: Black with smoky glass
- . Lamp: 3 x E27 40W Max. (not incl.)

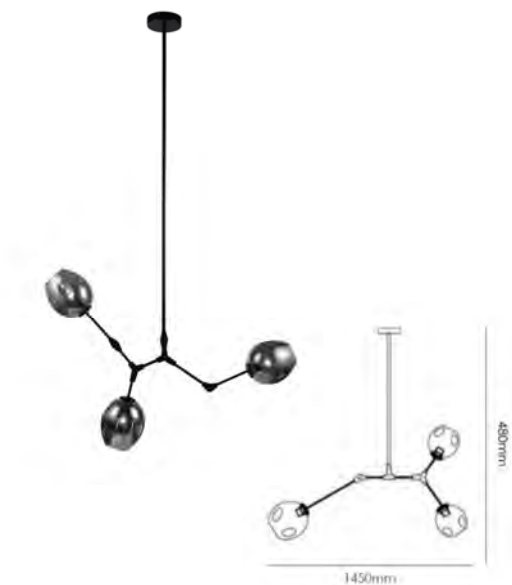

FLEURIR

UP3806RD-800

- . FLEURIR Round pendant light
- . Dimensions: Ø800 x H35mm
- . Cable length: 2000mm
- . Finish: Copper
- . Material: Carbon Steel & Transparent PVC
- . Built-in 108 x 0.3W=32.4W LED
- . LED colour temperature: 5000K



FLEURIR Pendant is a gorgeous decorative LED fixture inspired by Heracleum plant. Each transparent leaves contain an LED forming a natural structure without normal wires. With a steel canopy, the branch leave design provides sparkling illumination & visual enjoyment.



UP3806L

- . FLEURIR LED pendant light
- . Dimensions: D1000 x H65mm
- . Cable length: 1200mm
- . Finish: Copper
- . Material: Carbon Steel & Transparent PVC
- . Built-in 63 x 0.3W LED
- . LED colour temperature: 4000K



ARIA



UPARIA-3BRA

- . ARIA 3 light pendant
- . Dimensions: Ø430 x H650mm
- . Chain length: 750mm
- . Finish: Antique Brass
- . Lamp: 3 x SES 25W Max. (not incl.)

UPARIA-5BRA

- . ARIA 5 light pendant
- . Dimensions: Ø480 x H650mm
- . Chain length: 750mm
- . Finish: Antique Brass
- . Lamp: 5 x SES 25W Max. (not incl.)



Recommended LED globe:

ULEDCAN4WL-SESWW-DIM



NONA



UPNONA-BLK

UPNONA-CP

UPNONA-WH

- . NONA pendant light
- . Dimensions: Ø340 x H370mm
- . Cable length: 1500mm
- . Finish: Black / Copper / White
- . Material: Iron & Wood with white insert
- . Lamp: 1 x E27 60W Max. (not incl.)

JIGSAW

UP-JIGSAW-BLK

- . JIGSAW pendant light
- . Dimensions: Ø450 x H190mm
- . Cable length: 2500mm
- . Finish: Matt black metal with gold insert
- . Lamp: 1 x E27 60W Max. (not incl.)



Replica Tom Dixon BEAT SHAPE Series

Tom Dixon Beat Shade black pendant lights were originated and shaped when famous English designers set off to a field trip with his students to explore the relationship between design and effects of the livelihood of various cultures and peoples. The Beat Shape light series look great on their own and stunning when combined and mixed with the other collection namely Beat wide, Beat Tall, Beat Fat & Beat Stout.

- . Cable length: 2000mm black cloth cable
- . Finish: Matt black metal with gold insert
- . Lamp: 1 x E27 60W Max. (not incl.)

UCLEO

Ø360 x H160mm




UISOLA

Ø190 x H400mm



UALEA

Ø235 x H310mm



USOFIA

Ø350 x H330mm



BISON & HARPER Series



UP-BISON

- . BISON black pendant light
- . Dimensions: Ø180 x H110mm
- . Cable length: 2000mm cloth cable
- . Finish: Matt black finish with gold insert
- . Lamp: 1 x E27 40W Max. (not incl.)

UP-HARPER

- . HARPER black pendant light
- . Dimensions: W170 x L170 x H180mm
- . Cable length: 2000mm cloth cable
- . Finish: Matt black finish with gold insert
- . Lamp: 1 x E27 40W Max. (not incl.)

EMILY

UPEMILY6-REC

- . EMILY rectangular 6 light pendant
- . Dimensions: L730 x W360 x H240mm
- . Chain length: 2000mm
- . Finish: Matt black
- . Lamp: 6 x E27 60W Max. (not incl.)



SPACE



UP-SPACE-BLK-XS (Ø400mm)

UP-SPACE-BLK-S (Ø600mm)

UP-SPACE-WH-XS (Ø400mm)

UP-SPACE-WH-S (Ø600mm)

- . SPACE pendant light
- . Dimensions: Ø400mm / Ø600 x H300mm
- . Cable length: 1500mm
- . Finish: Gloss Black / Gloss White
- . Material: Metal with white plaster coral insert
- . Lamp: 1 x E27 40W Max. (not incl.)

OSLO

UPC-OSLO

- . OSLO concrete pendant light
- . Dimensions: Ø200 x H405mm
- . Cable length: 2000mm Grey & White
- . Finish: Concrete
- . Lamp: 1 x E27 40W Max. (not incl.)



POP

The POP range of pendants offered in 3 sizes: 200mm, 300mm, 400mm. They also come in 3 different colours (Black, White & Yellow). Try it as a “Pop Solo”, “Pop Cluster” or “Pop in Pop”. The combination are only limited by your imagination.



UP1005-BLK (W200 x L200mm)

UP1004-BLK (W300 x L300mm)

UP1003-BLK (W400 x L400mm)

UP1005-WH (W200 x L200mm)

UP1004-WH (W300 x L300mm)

UP1003-WH (W400 x L400mm)

UP1005-YEL (W200 x L200mm)

UP1004-YEL (W300 x L300mm)

Yellow is not available in 400mm

. Dimensions: 200 / 300 / 400mm

. Cable length: 2700mm black cloth

. Finish: Black, White & Yellow

. Lamp: 1 x E27 60W Max. (not incl.)



AERO



UPE27-1BLK (Black)

UPE27-1RED (Red)

UPE27-1WH (White)

- . AERO single pendant light
- . Cable length: 2100mm
- . Finish: Black / Red / White
- . Material: Silicon lamp holder & ceiling plate
- . Lamp: 1 x E27 60W Max. (not incl.)

KABEL



UPKABEL1-BLK-BLK (Black canopy with black cable)

UPKABEL1-BLK-RED (Black canopy with red cable)

UPKABEL1-WH-WH (White canopy with white cable)

UPKABEL1-WH-RED (White canopy with red cable)

- . KABEL single pendant light
- . Cable length: 2000mm fabric
- . Finish: Black / Red / White
- . Base Material: Porcelain / Aluminium
- . Lamp: 1 x E27 60W Max. (not incl.)

ILLIMITE



UILLIMITE-1P-BB (Brushed brass)

UILLIMITE-1P-BLK (Black)

UILLIMITE-1P-WH (White)

- . ILLIMITE single pendant light
- . Cable length: 3000mm
- . Canopy size: Ø60 x H85mm
- . Lamp holder size: Ø60 x H70mm
- . Finish: Brushed brass / Black / White
- . Material: Metal
- . Lamp: 1 x E27 60W Max. (not incl.)

CARRARA

UPCARRARA1 (Ø80 x H100mm)

UPCARRARA2 (Ø70 x H70mm)

UPCARRARA3 (Ø60 x H160mm)

- . CARRARA marble pendant light
- . Cable length: 2000mm
- . Finish: Marble
- . Lamp: 1 x E27 60W Max. (not incl.)



OCTOPUS



UPOCTOPUS-BLK

- . OCTOPUS 8 light swag pendant
- . Cable length: 2000mm cloth
- . Finish: Black
- . Lamp: 10 x E27 60W Max. (not incl.)

ANELLO

UPANELLO4-GD (Ø400, Gold)

UPANELLO5-GD (Ø500, Gold)

UPANELLO4-BLK (Ø400, Black)

UPANELLO5-BLK (Ø500, Black)

- . ANELLO round metal pendant light
- . Dimensions: Ø400mm / Ø500mm
- . Cable length: 1900mm black
- . Finish: Gold / Black
- . Material: metal with black cloth cable
- . Lamp: 1 x E27 40W Max. (not incl.)



VIVA



UVIVA-S-BLK-WW

UVIVA-S-WH-WW

- . VIVA tubular LED pendant light 300mm
- . Dimensions: Ø60 x H300mm
- . Cable length: 2000mm
- . Finish: Matt Black / Matt White
- . Material: Metal with cloth cable
- . Built-in 12W LED, 960lm
- . Dimmable
- . LED colour temperature: 3000K warm white
- . Beam angle: 40°



UVIVA-L-BLK-WW

UVIVA-L-WH-WW

- . VIVA tubular LED pendant light 600mm
- . Dimensions: Ø60 x H600mm
- . Cable length: 2000mm
- . Finish: Matt Black / Matt White
- . Material: Metal with cloth cable
- . Built-in 12W LED, 960lm
- . Dimmable
- . LED colour temperature: 3000K warm white
- . Beam angle: 40°

ACCESSORIES



UVIVA-BAFFLE-GD



UVIVA-REFLECTOR10

GAMMA



UGAMMA-BLK-1.2M

UGAMMA-BLK-1.8M

UGAMMA-BLK-2.4M

UGAMMA-BLK-3M

UGAMMA-WH-1.2M

UGAMMA-WH-1.8M

UGAMMA-WH-2.4M

UGAMMA-WH-3M

- . GAMMA linear LED profile
- . Available in 4 sizes: 1200, 1800, 2400 & 3000mm
- . Dimensions: L1200 x W50 x H70mm (1200mm)
 - L1800 x W50 x H70mm (1800mm)
 - L2400 x W50 x H70mm (2400mm)
 - L3000 x W50 x H70mm (3000mm)
- . Finish: Black / White
- . LED: Built-in 40W (1200mm) / 60W (1800mm) / 80W (2400mm) / 100W (3000mm)
- . 2 CCT, 3000K / 4000K
- . Lumen: 3000K 3800lm (1200mm) / 5800lm (1800mm)/ 7800lm (2400mm)/ 9600lm (3000mm)
 - 4000K 4000lm (1200mm) / 6000lm (1800mm)/ 8000lm (2400mm)/ 10000lm (3000mm)
- . Comes with dip switch on top for changing colour temperature (3000K & 4000K)
- . Cable length: 3000mm
- . Non dimmable



FLUTO

UPFLUTO-AMB


UPFLUTO-SMK

- . FLUTO glass pendant light
- . Dimensions: Ø80 x H300mm
- . Cable length: 1500mm clear plastic
- . Finish: Amble / Smoke
- . Material: Amber or Smoke hand blown glass with inner frosted glass diffuser
- . Lamp: 1 x G9 40W Max. (not incl.)

Recommended LED globes:

UG9LED5WF-WH/WW

UG9LED5W-WH/WW




LYNDA



UPLYNDA-GD

- . LYNDA glass pendant light
- . Dimensions: Ø650 x H750mm
- . Cable length: 1200mm
- . Finish: Glass
- . Lamp: 4 x E27 40W Max. (not incl.)

Glass Pendant Series

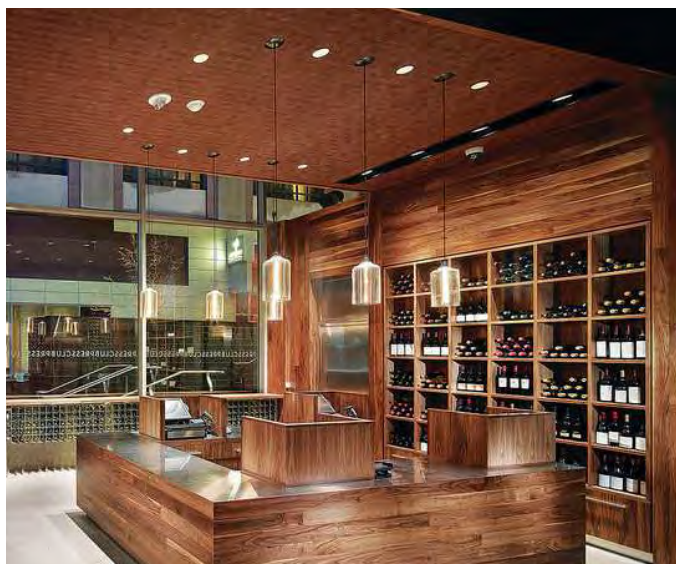

ALANA

U2715B-AMB

U2715B-SMK



- . ALANA glass pendant light
- . Dimensions: Ø280 x H160mm
- . Cable length: 2300mm black cloth
- . Finish: Amber / Smoke
- . Lamp: 1 x E27 40W Max. (not incl.)



DANELLE

U2715D1-AMB

U2715D1-SMK

- . DANELLE glass pendant light
- . Dimensions: Ø176 x H310mm
- . Cable length: 2300mm black cloth
- . Finish: Amber / Smoke
- . Lamp: 1 x E27 40W Max. (not incl.)



ESTHER

U2715D2-AMB

U2715D2-SMK

- . ESTHER glass pendant light
- . Dimensions: Ø243 x H300mm
- . Cable length: 2300mm black cloth
- . Finish: Amber / Smoke
- . Lamp: 1 x E27 40W Max. (not incl.)



MELISSA

U2715K-AMB

U2715DK-SMK

- . MELISSA glass pendant light
- . Dimensions: Ø280 x H280mm
- . Cable length: 2300mm black cloth
- . Finish: Amber / Smoke
- . Lamp: 1 x E27 40W Max. (not incl.)

Timber Pendant Series



TRIANGLE

UPTTRIANGLE

- . TRIANGLE timber pendant light
- . Dimensions: L300 x W300 x H300mm
- . Cable length: 2000mm brown cloth
- . Lamp: 1 x E27 40W Max. (not incl.)



CAGE

UP1001S-WD



- . CAGE timber pendant light
- . Dimensions: Ø230 x H320mm
- . Cable length: 2000mm brown cloth
- . Lamp: 1 x E27 40W Max. (not incl.)

ANELLE

UPTANELE



- . ANELLE timber pendant light
- . Dimensions: Ø300 x H430mm
- . Cable length: 2000mm brown cloth
- . Lamp: 1 x E27 40W Max. (not incl.)



AGLAIS

UPTAGLAIS

- . AGLAIS timber pendant light
- . Dimensions: Ø410 x H380mm
- . Cable length: 2000mm brown cloth
- . Lamp: 1 x E27 40W Max. (not incl.)

Replica SANDRA LINDER SELENE



UMD300-CLR (Ø300mm)

UMD400-CLR (Ø400mm)

UMD500-CLR (Ø500mm)

- . Replica SANDRA LINDER SELEN clear glass pendant
- . Dimensions: Ø300 / Ø400 / Ø500mm
- . Cable length: 3000mm black
- . Finish: Clear glass
- . Lamp: 1 x E27 60W Max. (not incl.)

UMD300-SMK (Ø300mm)

UMD400-SMK (Ø400mm)

UMD500-SMK (Ø500mm)

- . Replica SANDRA LINDER SELEN smoke glass pendant
- . Dimensions: Ø300 / Ø400 / Ø500mm
- . Cable length: 4000mm black
- . Finish: smoky glass
- . Lamp: 1 x E27 60W Max. (not incl.)



Replica TOM DIXON GLASS PENDANT



UMD150-CH

UMD150-CP

- . Dimensions: Ø150mm
- . Cable length: 2000mm clear
- . Finish: Chrome / Copper glass
- . Lamp: 1 x GU10 60W Max. (not incl.)

UMD300-CH

UMD400-CH

UMD300-CP

UMD400-CP

- . Dimensions: Ø300 / Ø400mm
- . Cable length: 2000mm clear
- . Finish: Chrome / Copper glass
- . Lamp: 1 x E27 60W Max. (not incl.)





SYVIA

UPSYLVIA (1 unit only)

- . SYVIA glass pendant light
- . Dimensions: Ø100mm
- . Cable length: 2700mm
- . Finish: Dimple glass
- . Lamp: 1 x 12V G4 Bi Pin 10W Max. (not incl.)
- . Lamp and driver / transformer are not included



ANNITA

U2719L-BLK (Black cable, Black lamp holder)

U2719L-WH (White cable, White lamp holder)

- . ANNITA clear glass pendant light
- . Dimensions: Ø160 x H230mm
- . Cable length: 2000mm
- . Finish: Black / White cloth with clear glass
- . Lamp: 1 x E27 G95 60W Max. (not incl.)

PULSAR

UPPULSAR-SMK

- . PULSAR smoke glass pendant light
- . Dimensions: Ø390 x H220mm
- . Cable length: 1000mm clear
- . Canopy: Ø120 x H20mm, Chrome finish
- . Finish: Smoky glass with clear crystal
- . Lamp: 5 x SES 25W Max. (not incl.)



UCMPULSAR-SMK

We also have CTC version, please refer to CTC series.



BOSTON


UP061P-AB

- . BOSTON pendant light
- . Dimensions: Ø540 x H640mm
- . Chain length: 2000mm
- . Finish: Antique Brass
- . Lamp: 1 x E27 60W Max. (not incl.)

ARTICHOKE

UMD-2353B-WH

- . White ARTICHOKE pendant light
- . Dimensions: Ø600 x H600mm
- . Cable length: 2000mm
- . Finish: White
- . Lamp: 1 x E27 60W Max. (not incl.)

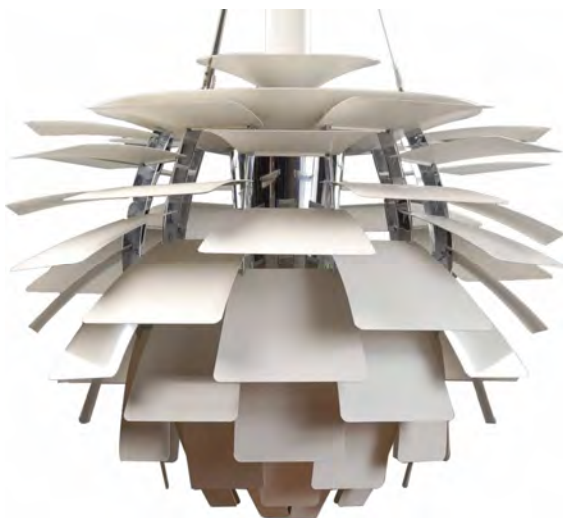

UMD-2353B-AL

- . Aluminium ARTICHOKE pendant light
- . Dimensions: Ø600 x H600mm
- . Cable length: 2000mm
- . Finish: Aluminium
- . Lamp: 1 x E27 60W Max. (not incl.)



UNICO




UFL-UNICO-BLK

UFL-UNICO-WH

- . UNICO floor lamp
- . Height: 1540mm
- . Shade Dimensions: Ø55 x 190mm
- . Base Dimensions: Ø250mm
- . Lamp: 1 x GU10 60W Max. (not incl.)
- . Integrated switch
- . Finish: Black / White



VISION

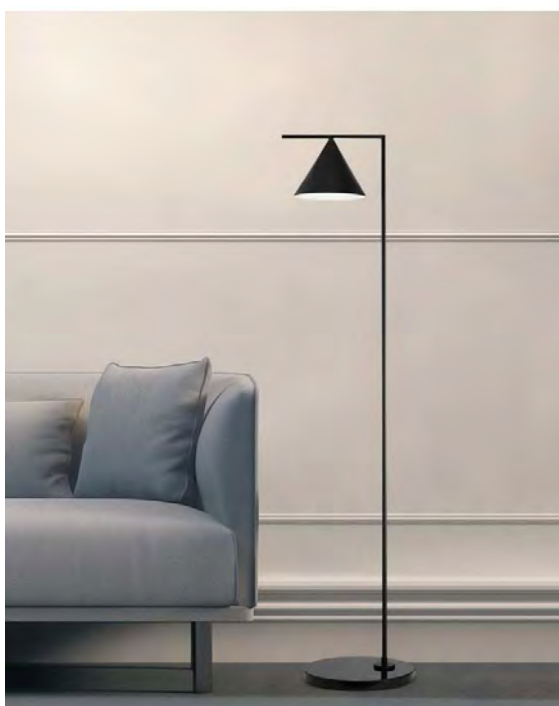

UFL-VISION-GLD

UFL-VISION-BLK

- . VISION floor lamp
- . Height: 1640mm
- . Shade Dimensions: Ø200 x 165mm
- . Base Dimensions: Ø350 x H40mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Shape Tilt: 90°
- . Finish: Gold / Black


ALPHA



UFL-ALPHA

- . ALPHA floor lamp
- . Height: 1600mm
- . Shade Dimensions: Ø150 x H200mm
- . Base Dimensions: Ø250 x H25mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Foot switch: 2000mm
- . Rotatable shade with white insert
- . Finish: Yellow

LANTEN

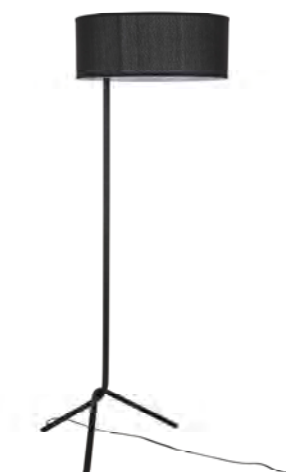

UFL-LANTEN-BLK(A+B)

- . LANTEN floor lamp
- . Height: 1490mm
- . Shade Dimensions: Ø420 x H200mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Inline switch
- . Finish: Matt Black metal & fabric

LILIA



UFL-LILIA-BLK

- . LILIA floor lamp
- . Height: 1500mm
- . Shade Dimensions: Ø200 x H200mm
- . Base Dimensions: W400mm
- . Lamp : 1 x E27 60W Max. (not incl.)
- . Foot switch
- . Finish: Matt Black

SCANDIVA



UFL-SCANDIVA-BLK


- . SCANDIVA floor lamp
- . Height: 1500mm
- . Shade Dimensions: Ø400 x H190mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Finish: Matt Black & timber

MARCO



UTL-MARCO-BLK

- . MARCO table lamp
- . Height: 565mm
- . Shade Dimensions: Ø153 x H350mm
- . Base Dimensions: Ø140 x H10mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Integrated switch
- . Finish: Matt Black

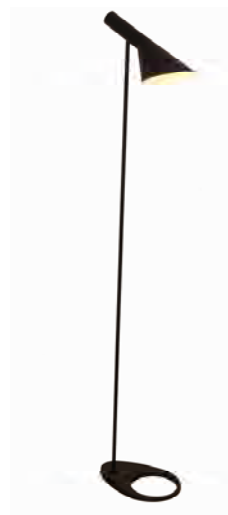

UFL-MARCO-BLK

- . MARCO floor lamp
- . Height: 1600mm
- . Shade Dimensions: Ø153 x H350mm
- . Base Dimensions: Ø195 x H10mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Floor switch
- . Finish: Matt Black

VISTA

UFL-VISTA-BLK

- . VISTA floor lamp
- . Height: 1600mm
- . Shade Dimensions: Ø150 x H260mm
- . Base Dimensions: W490mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Finish: Matt Black with white insert



ZEE

UFL-ZEE-BLK(A+B)

- . ZEE floor lamp
- . Height (adjustable): Lowest: 1350 - Highest 1660mm
- . Shade Dimensions: Ø450 x H200mm
- . Base Dimensions: Ø300 x H5mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Inline switch
- . Finish: Matt Black with black shade gold insert
- . Material: Metal & Fabric

Replica FLOS IC



UTL-FLOS-20GLD

- . Replica FLOS IC table lamp
- . Dimensions: Ø200 x H350mm
- . Lamp: 1 x SES base, 60W Max. (not incl.)
- . Finish: Satin Brass with opaque glass
- . Complete with black cable and switch
- . Ø300mm can be custom made, ETA 10 weeks



UFL-FLOS-25GLD

- . Replica FLOS IC floor lamp
- . Dimensions: Ø250 x H1350mm
- . Lamp: 1 x ES base, 60W Max. (not incl.)
- . Finish: Satin Brass with opaque glass
- . Complete with black cable and foot switch
- . Ø300mm can be custom made, ETA 10 weeks

ADNOR



UTLADNOR

- . ADNOR table lamp
- . Dimensions: Ø450 X H540mm
- . Lamp: 1 x SES base, 40W Max. (not incl.)
- . Complete with 2M brown cable

JORDAN



UTLJORDAN

- . JORDAN table lamp
- . Dimensions: L280 x W200 x H530mm
- . Lamp: 1 x ES base, 40W Max. (not incl.)
- . Complete with 2M brown cable

CHANTERELLE



UTL-CHANTERELLE-BLK

UTL-CHANTERELLE-WH

- . CHANTERELLE table lamp
- . Dimensions: Ø140 x H218mm
- . Lamp: Built-in 4W LED 3000K
- . Lumen: 150lm
- . Touch control on/off USB charger
- . Finish: Black / White
- . Material: ABS plastic + metal

ZEN



UTL-ZEN

- . ZEN table lamp
- . Dimensions: Ø200 x H580mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Lamp body colour: Smoke Glass
- . Glass shade colour: Clear & Amber

EMERALD



UTL-EMERALD

- . EMERALD table lamp
- . Height: 720mm
- . Shade Dimensions: Ø350 x H250mm
- . Base Dimensions: Ø150 x H520mm
- . Lamp: 1 x E27 60W Max. (not incl.)
- . Inline switch: Yes
- . Finish: Emerald glass & white fabric

HIMALAYAN



UTL-HIM2PLUG (Approx. 2kg)

UTL-HIM3PLUG (Approx. 3kg)

UTL-HIM7PLUG (Approx. 7kg)

HIMALAYAN pink salt lamp available in 3 sizes (2kg, 3kg and 7kg)

Complete with SAA approved plug and E14 lamp holder. Globe included.



UTL-HIM2USB

HIMALAYAN RGB Salt Lamp powered by USB. It has RGB function for changing colour.

Ultra Sterilize Table Lamp



UTL-UVLIGHT-BLK

UTL-UVLIGHT-WH

- . Clinical approved Ultra Sterilize table lamp
- . Dimensions: Ø85 x H450mm
- . Table base size: Ø190 x H48mm
- . 38W LED UV lamp with wireless remote control
- . Kills germ within 40sqm room
- . Complete with 1.3M flex & plug
- . Timing panel control: 15mins, 30mins, 60 mins timing selection

Our new Smart Lighting range allows Wi-Fi connection of your lighting and automation through the Smart Life app. This easy to use app can control all of our Smart Lighting range and can be paired with Amazon Alexa or Google Home for voice control of your lighting. The Smart wall plates and sockets can be easily be retrofitted in existing properties.

Smart Switches




USMART-SIG-WH



USMART-S2G-WH



USMART-S3G-WH



USMART-S4G-WH



USMART-SIG-BLK



USMART-S2G-BLK



USMART-S3G-BLK




USMART-S4G-BLK



USMART-CS-WH



USMART-CS-BLK



USMART-P2G-WH



USMART-P2G-BLK

- . High quality tempered crystal glass panel with blue LED backlit switches
- . Wi-Fi enabled for easy connection to the Smart Life app. Smart Life can be paired with Amazon Alexa or Google Home
- . Easy to retrofit into old switch cut-outs
- . Dimensions: W120 x L72 x D42mm
- . Suitable for 2-way switching
- . Operation voltage 240V AC 50Hz (Max. 2400 Watts)

Smart Dimmers



USMART-SIG-DIMMER



USMART-SIG-DIMMER-SLAVE

- . Wi-Fi enabled and controllable through the Smart Life app. Voice controllable with Amazon Alexa or Google Home
- . Trailing Edge phase control dimming for the best functionality with LED lighting
- . Overload, over current and temperature protection
- . 240V AC 50Hz
- . Connected load: 10VA-300VA (1-15 typical LED down lights Max 200W)
- . Compatible with Clipsal type wall plates
- . Suitable for LED, 240V halogen, 240V incandescent and dimmable electronic transformers

Smart Downlight



USMARTDL-10W-RGBWW

- . Wi-Fi enabled. Can be automated and controlled using the Smart Life app
- . Change colour and dim downlights using the app. RGB + Cool white / Warm White
- . Standard 90mm cut-out means they can easily be retrofitted into existing properties
- . Dimmable
- . Can be paired through the app to Amazon Alexa or Google Home for voice control
- . 10 Watts
- . Colour Temperature: 2700 - 6000K & RGB
- . 650-750lm
- . Size: Ø115 x H60mm, Cut out: Ø90mm
- . Beam angle 120°
- . CRI ≥80

LED ROTARY & PUSH BUTTON DIMMER

**UDIMMER-250**

- . LED rotary dimmer
- . Dimensions: W23.2 x L23.2 x H55.8mm
- . Fits all standard switch plates
- . No neutral required
- . Soft start
- . Suitable for 1-way or 2-way operation
- . Overheating protection
- . Adjustable dimming range with steady increment
- . Full range dimming from 0-100%
- . Trailing Edge Dimming
- . Working Voltage: 220- 240Vac / 50Hz
- . Max load : 250W , Min load: 5W

**UDIMMER-350**

- . LED push button dimmer
- . Dimensions: W23.2 x L23.2 x H44.3mm
- . Fits into standard wall plates
- . No neutral required
- . Soft start
- . Suitable for 1-way operation
- . Overheating protection
- . Adjustable dimming range with steady increment
- . Full range dimming from 15% -100%
- . Trailing Edge Dimming
- . Working Voltage: 240V 50Hz
- . Max load : 350W , Min load: 10W
- . Two cover caps are provided

**USOCKET10A**

- . 250V 10Amp Surface Socket
- . 100pcs / carton

Pendant Ceiling Plate Series

. Surface mount plates, allowing you to create 3 and 5 Light Cascading fittings, or 7 and 13 Light Clusters

. Available in 3 holes, 5 holes, 7 holes & 13 holes



UPLATE60-BLK/WH

1 hole plate

Ø60 x H30mm

Matt Black or Matt White




UPLATE150-BLK

without hole plate

Ø150 X H57mm

Black



UPLATE150-7-BLK

7 holes plate

Ø150 X H57mm

Black



UPLATE320-BLK

without hole plate

Ø320 X H40mm

Black




UPLATE150-7-CH

7 holes plate

Ø150 X H57mm

Polish Chrome




UPLATE150-13-MCH

13 holes plate

Ø150 X H60mm

Satin Chrome




UPLATE 320-CH

without hole plate

Ø320 X H40mm

Polish Chrome




UPLATE320-3-CH

3 holes plate

Ø320 X H40mm

Polish Chrome



UPLATE320-5-CH

5 holes plate

Ø320 X H40mm

Polish Chrome

2 CORD 240V CLOTH CABLE



UCABLE2CLOTH-BLACK

2 cord black cloth cable



UCABLE2CLOTH-RED

2 cord red cloth cable



UCABLE2CLOTH-YELLOW

2 cord yellow cloth cable

3 CORD 240V CLOTH CABLE



UCABLE3CLOTH-B/W

3 cord black & white cloth cable



UCABLE3CLOTH-BLACK

3 cord black cloth cable



UCABLE3CLOTH-BLUE

3 cord blue cloth cable



UCABLE3CLOTH-JADE

3 cord jade cloth cable



UCABLE3CLOTH-SILVER

3 cord silver cloth cable



UCABLE3CLOTH-TEAL

3 cord teal cloth cable



UCABLE3CLOTH-WHITE

3 cord white cloth cable



UCABLE3CLOTH-YELLOW

3 cord yellow cloth cable



UCABLE3-CLEAR

3 cord clear transparent cable



UGU10-HOLDER

240V GU10 lamp holder



UGU10FLEX

240V GU10 lamp holder
with flex & plug



UCORD-2

UCORD-3

2 pin or 3 pin flex & plug 1200mm



UVDEHOLDER25

UVDEHOLDER60

12V lamp holder
250mm / 600mm



UBASE-E27-MR16

E27 to MR16 (GX5.3 lamp base)
Convert from 240V to 12V



UBASE-GU10-MR16

GU10 to MR16 (GX5.3 lamp base)
Convert from 240V to 12V



USCRW-SG-JAR

Single screw insulated connector
100pcs/Jar



USCRW-DB-JAR

Double screw insulated connector
50pcs/Jar



UWL-BOX

Protection box suitable for wall light
(UWL36WH-WW / UWL38WH-WW)
L106 x W68 x D48mm

Measurements provided are accurate at the time of publication, but may vary within the manufacturing process. Users are advised to confirm exact specifications prior to installation. UGE Lighting reserve the right to improve, modify or update designs without prior notice. We make every effort to ensure that the information contained in this catalogue is correct, but we reserve the right to make dimensional design and technical changes to its products without notice. Current information should be checked in time of placing an order.