

5CCT OPTIC MODULE DOWNLIGHT SERIES


Small scale does not mean small on style!

Versatile with pop in and pop out lamp system. 50mm diameter perfectly match the traditional downlight fixtures. "Newest 5CCT changeable technology" plus "Lens" option always provide variety for indoor lighting application and uniform lighting distribution or accent lighting. Color changeable from 2700/3000/4000/5000/5700k will be more convenient for your lighting choices.

Optic strives to deliver complete solutions so that our customers can get products with the best guarantee solutions on the market.


Newest generation Evercore LED technology

Evercore COB led technology provides multi color temperature changeable from 2700-5700k. Each color can achieve a pure lighting distribution.



Interchangeable frames

Akzo Nobel powder Coating Finish, white or black, delivers a complete solutions from flat, recessed, adjustable, fi ed and round etc.



External isolation driver

Adopted imported IC components for good safety performance, smooth Phase cut dimming and C- Bus 2 compatible with most leading/ trailing edge and universal dimmers.



Housing design

Family die-casting aluminum heat sinker to offer superior heat emission for the whole lamp in 12 watt.





UOPTIC MINI 12-5CCT (5 Colour Change)

General Specifications | UOPTIC MINI 12-5CCT

Wattage | 12W

Material | Powder Coated Aluminium

IP | IP65

Warranty | 3 years

LED

Colour Temp | 2700K-3000K-4000K-5000K-5700K

Lumens | 615m-681m-691m-731m-746m

Beam Angle | 60°

CRI | >90

Colour Deviation | SDCM<6

Lifetime | >40,000hrs

Driver

Power Factor | >0.9


Dim Method | Phase cut

Input Voltage | AC200-240V


Output Voltage | 33-38V

Output Current | 210mA

* IES Report available on request

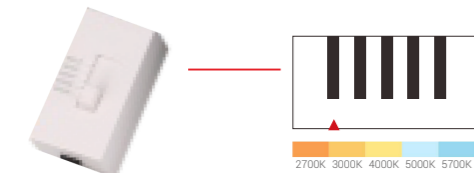

Use the pre-set switch to set color temperature before installation




Optic retrofit module + Inte changeable designer downlight frames
So versatile with pop in and pop out lamp system




UDL3060

Ø90-95mm 25°



UDL3061

Ø75-77mm



UDL3062

Ø90-92mm 25°




UDL3063

Ø70-75mm



U2017-WH/Pin Hole

Ø70-75mm



UDL3065

Ø90-92mm



UDL3064/1

L100-W100mm



UDL3064/2

L100-W200mm

