




HALO - 300 TRI-COLOUR LED OYSTER

MODEL No.
UOYS-HALO-S-WH-3CCT
UOYS-HALO-S-BLK-3CCT



3 Step dimming

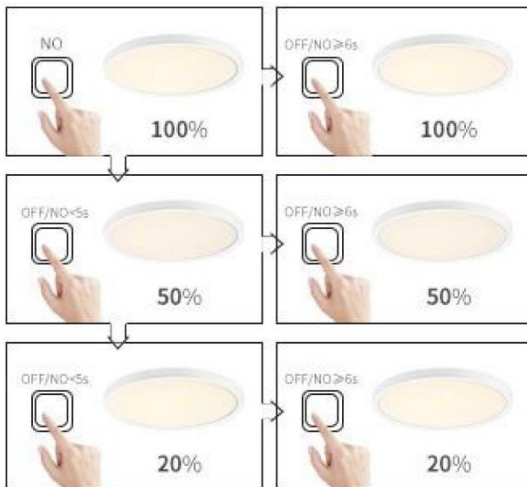

Finish	Matt White or Matt Black Trim
Product Material	Polycarbonate - Opaque Diffuser

Dimensions & Weight	
Dimensions	Ø 300 x H 24 mm
Product weight	0.7 Kg

Electrical Data	
Wattage	24W
Driver	Non-isolated driver
Input: voltage	230 -277 VAC
Power frequency	50 Hz

Photometric Data	
Colour temperature	3000K / 4000K / 6000K
Luminous flux	2600 lm
Colour standard deviation	≤5 sdcn
Light colour	3CCT selectable
Colour Rendering	>90

Lighting Technology Data	
Radiation Angle	120°

Standards and Warranty	
Protection grade IK / IP Rating	IK06/IP40
Certification	RCM & SAA Approval
Electrical Protection	CLASS II Double insulated Earth cable not required
Replacement Warranty	3 Years Domestic use 2 Years Commercial use




HALO - 600 TRI-COLOUR LED OYSTER

MODEL No.
UOYS-HALO-M-WH-3CCT
UOYS-HALO-M-BLK-3CCT



3 Step dimming

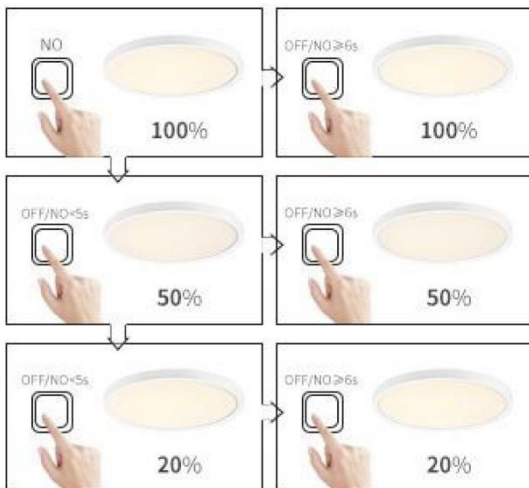

Finish	Matt White or Matt Black Trim
Product Material	Polycarbonate - Opaque Diffuser

Dimensions & Weight	
Dimensions	Ø 600 x H 24 mm
Product weight	2.85 Kg

Electrical Data	
Wattage	45W
Driver	Non-isolated driver
Input: voltage	230 -277 VAC
Power frequency	50 Hz

Photometric Data	
Colour temperature	3000K / 4000K / 6000K
Luminous flux	5400 lm
Colour standard deviation	≤ 5 sdc
Light colour	3CCT selectable
Colour Rendering	> 90

Lighting Technology Data	
Radiation Angle	120°

Standards and Warranty	
Protection grade IK / IP Rating	IK06/ IP40
Certification	RCM & SAA Approval
Electrical Protection	CLASS II Double Insulated Earth cable not required
Replacement Warranty	3 Years Domestic use 2 Years Commercial use




LIGHTING THAT OUTPERFORMS
SINCE 1998

HALO - 800 TRI-COLOUR LED OYSTER

MODEL No.
UOYS-HALO-L-WH-3CCT
UOYS-HALO-L-BLK-3CCT



3 Step dimming

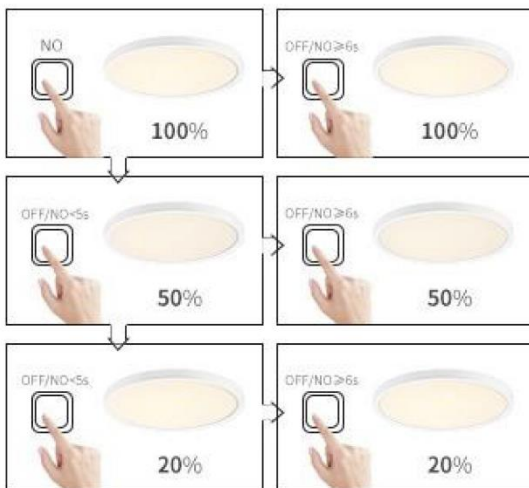

Finish	Matt White or Matt Black Trim
Product Material	Polycarbonate - Opaque Diffuser

Dimensions & Weight	
Dimensions	Ø 800 x H 24 mm
Product weight	5.4 Kg

Electrical Data	
Wattage	60W
Driver	Non-isolated driver
Input: voltage	230 -277 VAC
Power frequency	50 Hz

Photometric Data	
Colour temperature	3000K / 4000K / 6000K
Luminous flux	7500 lm
Colour standard deviation	≤5 sdcn
Light colour	3CCT selectable
Colour Rendering	>90

Lighting Technology Data	
Radiation Angle	120°

Standards and Warranty	
Protection grade IK / IP Rating	IK06 / IP40
Certification	RCM & SAA Approval
Electrical Protection	CLASS II Double Insulated Earth cable not required
Replacement Warranty	3 Years Domestic use 2 Years Commercial use